
4 Tankless Units Installation- Common Venting

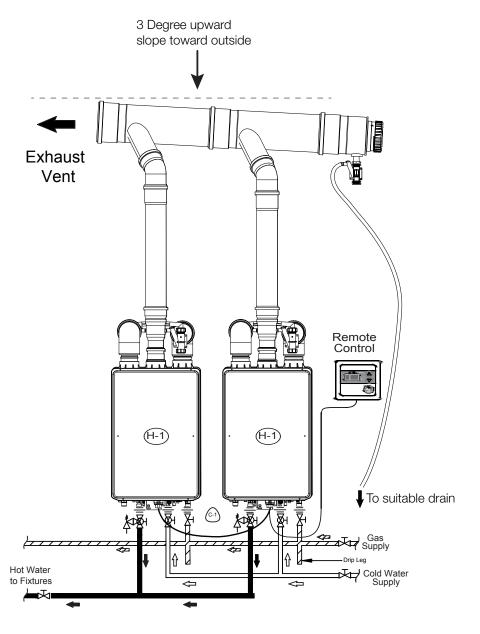

System Components Written System Description H-1: (4) Tankless RTGH-CM95DVLN Water Heaters Four Unit Tankless Back to Back installation: C-1: (3) EZ-Link Cable Four tankless water heaters shall be installed in a back to back (4) Tankless Service Valve Kits (Webstone EXP2 or equivalent) configuration, connected with an EZ-Link cable, a single remote (4) Pressure Relief Valve for tankless control, and vented to the outside per the Rheem Common Venting (1) Common Vent kit: 4 Units Room Air Back to Back Installation instructions. The tankless units shall be plumbed in parallel with a minimum gas and water header of 1" pipe or as code requires. NOTE: Common Vent is only approved for Natural Gas Applications. Cold water shall feed the tankless units. The tankless units shall supply a single temperature setting of water for application use. Legend Drawing No: 4-Tankless-Units-Installation-Common-Venting Pressure Relief Shut-off Valve This drawing is intended as a guide only. It is not to be used as an alternative to Cold Water Isolator Valve Assembly a professionally engineered project drawing. This drawing does not imply compliance with local building codes. Installation may vary, depending on Hot Water Pipe installation location, and must be done in accordance with all local building Check Valve codes. Consult with local building officials prior to installation.