

# PERFORMANCE PLATINUM™



The new degree of comfort®

## PERFORMANCE PLATINUM™ Maximus Gas Water Heater offers maximum efficiency & continuous flow

### Efficiency

- Up to .90 UEF reduces operating cost
- ENERGY STAR® rated

### Performance

- Up to 3.8 GPM continuous flow of hot water at setpoint temperature
- Highest Delivery of 198 gallons in MaxMode™

### Easy Installation

- Built-in Condensate Neutralizer
- Certified for multiple termination configurations
- Easy front access to connections and components
- Zero clearance on sides and back
- Longest vent runs, installs as PV or PDV with same unit
- 8" Centers on top water connections for easy replacement of standard gas water heaters
- 1/2" NPT gas connection
- 3/4" NPT water inlet and outlet; 3/4" condensate drain connections
- Side water connections for space heating applications
- Temperature and pressure relief valve installed

### Integration

- LCD Display with built-in water leak sensor and system health alert with audible alarm

- Integrated EcoNet® Wi-Fi-connected technology and free mobile app gives users control over water systems, allowing for customizable temperature, vacation settings, energy savings and system monitoring at home or away.

- LeakSense™ Built-in Leak Detection System detects any leak large or small, internal or external<sup>2</sup>
- Optional auto water shut-off valve accessory limits leaks to no more than 20 ounces of water<sup>3</sup>

### Operation Modes

- MaxMode™ for up to 15% more hot water on demand
- Vacation/Away mode for energy savings during non-use time

### High Altitude Compliant

- Certified to 10,100 ft. above sea level

### Plus...

- Dual anode rods extend tank life
- Enhanced flow brass drain valve for faster draining
- Advanced Controls and Start-up Verification for better diagnostics, faster installation and easier servicing

### Warranty

- 12-Year limited tank and parts warranty
- See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



40 & 50-Gallon Model

75-Gallon Model

## PERFORMANCE PLATINUM Maximus

40, 50 and 75-Gallon Capacities  
Up to 100,000 BTU/h  
Natural and LP Gas  
Ultra Low NOx



LEED Points = 2



For more information, please visit  
[Rheem.com/maximus](http://Rheem.com/maximus)

See specifications chart on next page.

<sup>1</sup>Wi-Fi broadband internet connection required. <sup>2</sup>Water leaks from the heater only, as tested across scenarios including a minimum of 5.5mL/hr volume leak rate, using most common installation scenarios. <sup>3</sup>Source: Rheem Leak-Sensing Data; testing under a vacuum lock using 50-gallon tank, no expansion tank, average tank pressure of 40 psi, assuming no additional faucets are opened. Accessory sold separately. Contact your contractor or distributor for more details.





The new degree of comfort.

# PERFORMANCE PLATINUM™ Maximus Specifications

Fuel Type	Desc.	Nominal Gallon Cap.	Rated Gallon Cap.	Model Number	Gas Input in Thous. BTU/h	Recovery in G.P.H. 90° F Rise	First Hour Rating (Gals.)	MaxMode™ Delivery (Gallons)	Height to Intake A	Overall Unit Height B	Diam. C	Ht. to Gas Conn. D	Vent Size E	Water Conn. Center F	Ht. to Side Tap Hot G	Ht. to Side Tap Cold H	Ht. to Exhaust J	Water Conn. Size	Ship Wt. (LBS)	Uniform Energy Factor (UEF)
Natural Gas	Tall	40	40	XG40S12UHN50U0	50	64	88	101	54-1/4	54-1/2	21-3/4	50-1/4	2", 3", 4", 2" or 3" Flex	8	38	12	10	3/4	221	0.90
Natural Gas	Tall	50	50	XG50T12UHN50U0	50	64	95	109	64-1/4	65-1/2	21-3/4	61	2", 3", 4", 2" or 3" Flex	8	48	12	10	3/4	247	0.88
Natural Gas	Tall	50	50	XG50T12UHN76U0	76	97	136	156	64-1/4	65-1/2	21-3/4	61	2", 3", 4", 2" or 3" Flex	8	48	12	10	3/4	256	0.89
Natural Gas	Tall	50	50	XG50T12UHN100U0	100	128	167	192	64-1/4	65-1/2	21-3/4	61	2", 3", 4", 2" or 3" Flex	8	48	12	10	3/4	256	0.89
Natural Gas	Tall	75	75	XG75T12UHN100U0	100	129	167	198	62-5/8	64-1/2	26-1/4	60-1/8	2", 3", 4", 2" or 3" Flex	12	-	-	9	3/4	332	0.88
Liquid Propane	Tall	40	40	XP40S12UHC50U0	50	64	88	101	54-1/4	54-1/2	21-3/4	50-1/4	2", 3", 4", 2" or 3" Flex	8	38	12	10	3/4	221	0.90
Liquid Propane	Tall	50	50	XP50T12UHC50U0	50	64	95	109	64-1/4	65-1/2	21-3/4	61	2", 3", 4", 2" or 3" Flex	8	48	12	10	3/4	247	0.88
Liquid Propane	Tall	50	50	XP50T12UHC76U0	76	97	136	156	64-1/4	65-1/2	21-3/4	61	2", 3", 4", 2" or 3" Flex	8	48	12	10	3/4	256	0.89
Liquid Propane	Tall	50	50	XP50T12UHC100U0	100	128	167	192	64-1/4	65-1/2	21-3/4	61	2", 3", 4", 2" or 3" Flex	8	48	12	10	3/4	256	0.89
Liquid Propane	Tall	75	75	XP75T12UHN100U0	100	129	167	198	62-5/8	64-1/2	26-1/4	60-1/8	2", 3", 4", 2" or 3" Flex	12	-	-	9	3/4	332	0.88

Uniform Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements. All units have integrated Wi-Fi control board.

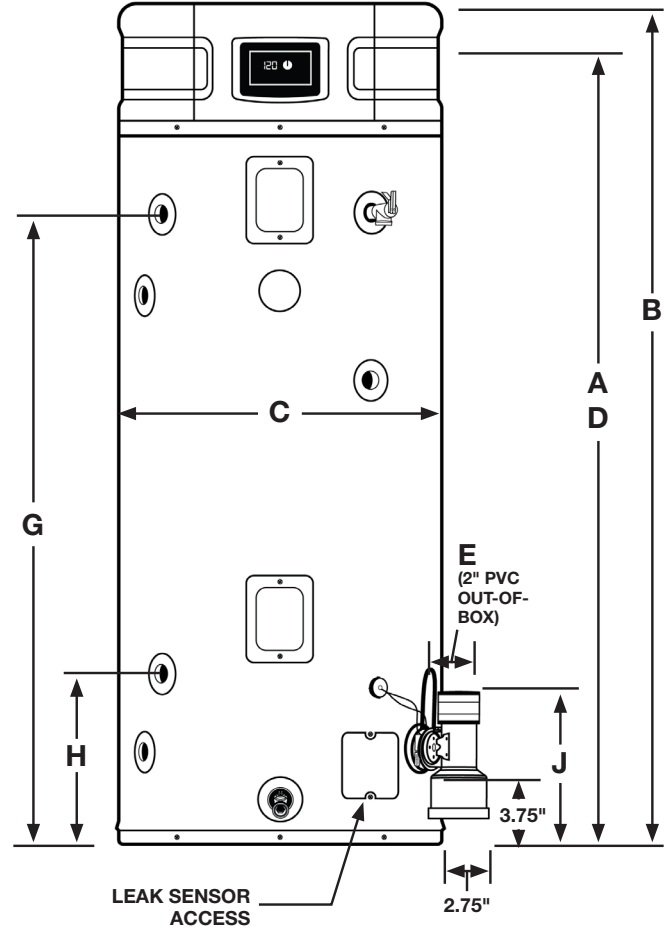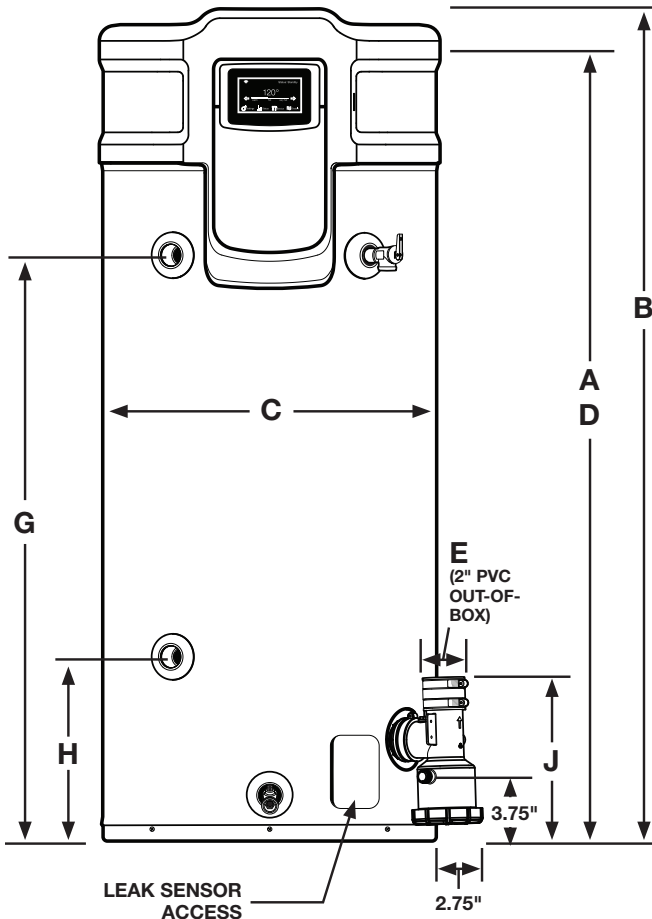

## RESIDENTIAL EQUIVALENT VENT LENGTHS

40G-50K AND 50G-50K; POWER VENT CONFIGURATION; (RIGID PIPE)				40G-50K AND 50G-50K; POWER DIRECT VENT CONFIGURATION; (RIGID PIPE)				TERMINATIONS
ELEVATION (FEET)	VENT SIZE (INCHES)	NAT MAX EQ. LENGTH (FEET)	LP MAX EQ. LENGTH (FEET)**	NAT MAX EQ. LENGTH (FEET)		LP MAX EQ. LENGTH (FEET)**		
				INTAKE	EXHAUST	INTAKE	EXHAUST	
0-2000	2"	50'	50'	50'	50'	50'	50'	2" AND 3" 90° ELBOWS, 2", 3" AND 4" CONCENTRIC AND 2" AND 3" PANCAKE
	3"	140'	140'	140'	140'	140'	140'	
	4"	140'	140'	140'	140'	140'	140'	
2000-5400	2"	50'	40' <small>(High Altitude Model Required)</small>	50'	50'	40'	40'	
	3"	140'	110' <small>(High Altitude Model Required)</small>	140'	140'	110'	110'	
	4"	140'	110' <small>(High Altitude Model Required)</small>	140'	140'	110'	110'	
5400-7800	2"	50'	20' <small>(High Altitude Model Required)</small>	50'	50'	10'	20'	
	3"	140'	110' <small>(High Altitude Model Required)</small>	140'	140'	110'	110'	
	4"	140'	110' <small>(High Altitude Model Required)</small>	140'	140'	110'	110'	
7800-10,100	2"	50'	Not Applicable	50'	50'	Not Applicable	Not Applicable	
	3"	140'	Not Applicable	140'	140'	Not Applicable	Not Applicable	
	4"	140'	Not Applicable	140'	140'	Not Applicable	Not Applicable	
MINIMUM INTAKE AIR AND EXHAUST VENT: 10' EQUIVALENT LENGTH								
NATURAL GAS MODELS CAN BE INSTALLED IN HIGH ALTITUDE LOCATIONS WITH DISPLAY CONTROL SETTING CHANGES AS SHOWN IN HIGH ALTITUDE SECTION OF MANUAL.								
**LP GAS MODELS HAVE UNIQUE HIGH ALTITUDE MODEL NUMBERS. THEY ARE FACTORY SET FOR HIGH ALTITUDE OPERATION. HIGH ALTITUDE MODELS HAVE A 'H' DESIGNATION AT THE END OF THE MODEL NUMBER. REFER TO RATING PLATE FOR MODEL NUMBER.								

50G-76K, 50G-100K, 75G-100K; POWER VENT CONFIGURATION; (RIGID PIPE)				50G-76K, 50G-100K, 75G-100K; POWER DIRECT VENT CONFIGURATION; (RIGID PIPE)				TERMINATIONS
ELEVATION (FEET)	VENT SIZE (INCHES)	NAT MAX EQ. LENGTH (FEET)	LP MAX EQ. LENGTH (FEET)	NAT MAX EQ. LENGTH (FEET)		LP MAX EQ. LENGTH (FEET)		
				INTAKE	EXHAUST	INTAKE	EXHAUST	
0-10,100	2"	40'	40'	40'	40'	40'	40'	2" AND 3" 90° ELBOWS, 2", 3" AND 4" CONCENTRIC AND 2" AND 3" PANCAKE
	3"	140'	140'	140'	140'	140'	140'	
	4"	140'	140'	140'	140'	140'	140'	
MINIMUM INTAKE AIR AND EXHAUST VENT: 10' EQUIVALENT LENGTH								

**Note:** Vent pipe size should not be mixed for venting these water heater. Use same diameter pipe for all venting of the unit.

All power direct models can use 2" concentric venting only as listed in the above chart.

2" Concentric vent can only be used with 2" rigid piping.

**DO NOT** mismatch concentric vent terminations with different rigid piping as it may cause the heater to malfunction or cause a lock-out condition unless specifically mentioned.

3" Concentric vent may be used with 3" and 4" venting.

FLEXIBLE POLYPROPYLENE PIPE (FT)				
PIPE SIZE (IN.)	2"		3"	
	INTAKE	EXHAUST	INTAKE	EXHAUST
MAX PV	0	30'	0	30'

VENTING – ELBOW EQUIVALENT VENT LENGTH					
90°			45°		
SHORT SWEEP	STANDARD	LONG SWEEP	SHORT SWEEP	STANDARD	LONG SWEEP
DO NOT USE	7'	5'	DO NOT USE	4.5'	2.5'

• Each 45 degree elbow reduced the equivalent length by 2-1/2 ft.



The new degree of comfort.

## Altitude Guide by Model


MODEL	0-2000 FEET	2000-5400 FEET	5400-7800 FEET	7800-10,100 FEET
40G / 50K BTU NG	No Changes Needed – Good Out The Box	Change to High Altitude Mode in User Interface		
40G / 50K BTU LP	No Changes Needed – Good Out The Box	Factory Order Model with “-H” Designation – Change to High Altitude Mode in User Interface	N/A	
50G / 50K BTU NG	No Changes Needed – Good Out The Box	Change to High Altitude Mode in User Interface		
50G / 50K BTU LP	No Changes Needed – Good Out The Box	Factory Order Model with “-H” Designation – Change to High Altitude Mode in User Interface	N/A	
50G / 76K BTU NG	No Changes Needed – Good Out The Box			
50G / 76K BTU LP				
50G / 100K BTU NG	No Changes Needed – Good Out The Box			
50G / 100K BTU LP				
75G / 100K BTU NG	No Changes Needed – Good Out The Box			
75G / 100K BTU LP				

## Maximus Accessories


PART NO.	DESCRIPTION
SP20897	2" CONCENTRIC TERMINATION
SP20245	3" CONCENTRIC TERMINATION
SP20796	4" CONCENTRIC TERMINATION
SP20285	2" FLAT TERMINATION
SP20286	3" FLAT TERMINATION
SP21091	2" POLYPROPYLENE FLEX PIPE – 30 FEET
AP19356	3" POLYPROPYLENE FLEX PIPE – 30 FEET
SP21172	AUTO SHUTOFF VALVE KIT



Flat Vent Termination (SP20285, SP20286)

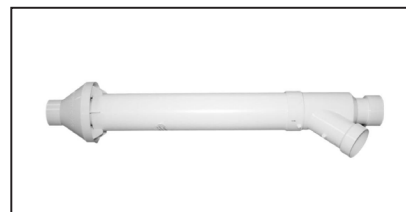

Concentric Vent Termination (SP20897, SP20245, SP20796)

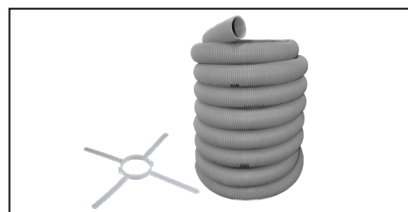

Flex Venting Kit (SP21091, AP19356)



Shutoff Valve (SP21172)

*In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.*