

THE RHEEM MARATHON
VS. RHEEM STANDARD ELECTRIC STEEL TANK

FEATURE COMPARISON	MARATHON	RHEEM STANDARD ELECTRIC STEEL TANK PRODUCT
Low Product Weight	✓	✗
Dry Fire Protection	✓	✗
Element	Titanium	Copper
Anode Rod Needed	No	Yes
Corrosion Resistant	✓	✗
Warranty	Lifetime	6 years
Water Heaters Needed Over Lifetime	1	8
Dent / Corrosion Resistant Jacket	✓	✗
Salt Water Resistant Jacket	✓	✗

A LIFETIME OF
H^OT WATER

DESIGNED
TO **OUTLAST**
STANDARD
ELECTRIC
WATER
HEATERS

RHEEM® MARATHON®



**THE RHEEM® MARATHON—BUILT TO LAST.
WARRANTIED FOR LIFE.**

*In keeping with its policy of continuous progress and product improvement,
Rheem reserves the right to make changes without notice.*

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • www.rheem.com

visit Rheem.com/HotWater4Life
for more information.



The new degree of comfort.®

For more information, call **1-800-621-5622**,
visit Rheem.com/HotWater4Life or see your local distributor.

PRINTED IN U.S.A. • 05/18 • WP • FORM NO. 104-8CAN Rev. 4

RHEEM® MARATHON® SELLING POINTS

Here's why the line of Rheem® Marathon® Electric Water Heaters is the lifelong choice for you and your customers.

Lifetime Tank Warranty

Tank is built to last for as long as the customer owns their home


- Eliminates call backs due to durability issues
- FREE warranty upgrade from 10 years to Lifetime if customer registers online¹

Easy Installation and Service

- Lightweight design for one-person, low-cost installation
- Quick maintenance thanks to a bowl-shaped tank bottom that drains completely and no anode rod to replace

Non-Metallic Tank

- Seamless, blow-molded polybutene inner tank will not rust or corrode
- Outer tank resists dents, scratches and salt air
- Offers the best durability, withstands the harshest environments and eliminates smelly water due to chemical reactions with sulfates

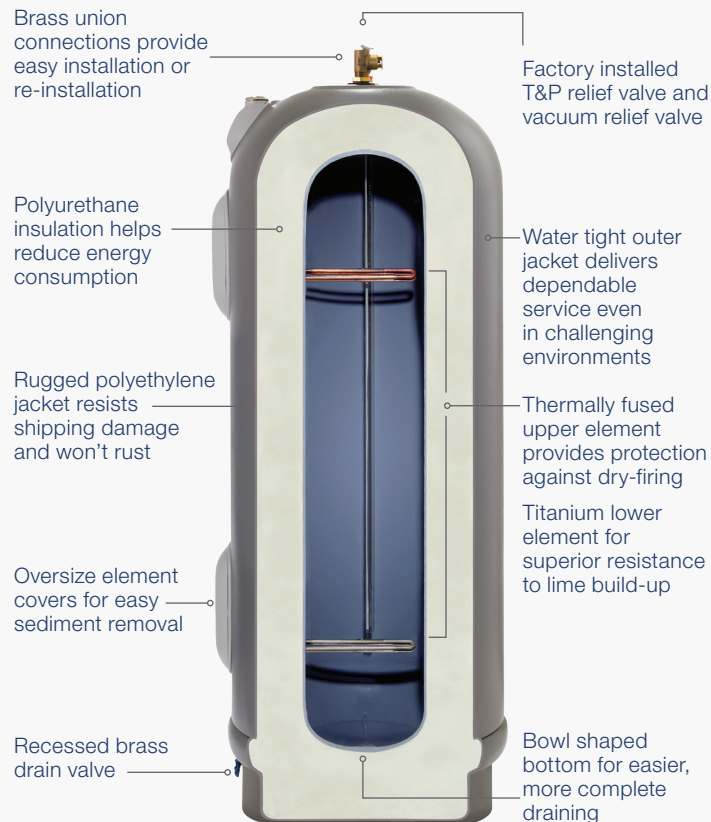

No anode rod required, which means no smelly water normally caused by chemical reactions with sulfates.

¹Warranty is provided to original customer in a residential application after online product registration is complete. Registration must be completed within 90 days of installation. See warranty certificate for complete information.

MARATHON® SPECIFICATIONS

DESCRIPTION			DIMENSIONS (IN.)		
NOMINAL GAL. CAP.	MODEL NUMBER	FIRST HR. RATING GPH	HEIGHT TO T&P (IN.)	DIAM. (IN.)	APPROX. SHIP. WT. (LBS.)
30	CMR30245	42	53	21-5/8	75
40	CMR40245†	52	65-1/2	21-3/4	90
50	CMR50245†	61	66-3/4	23-1/2	100
75	CMR75245†	78	62-5/8	28-1/4	122
85	CMRG85245†	91	70-1/4	28-1/4	134
105	CMRG105245†	104	70-3/4	30-1/4	152
50 SHORT	CMSR50245	54	47-1/4	28-1/4	95

†LEED Point = 1

MARATHON® POINT-OF-USE SPECIFICATIONS

DESCRIPTION				DIMENSIONS (IN.)			
GAL. CAP.	MODEL NUMBER	ELEMENT WATTAGE	VOLT-AGE	TANK HEIGHT	HEIGHT TO WATER CONN.	DIAM.	SHIP WT. (LBS)
15	CMR15120	2000	120	31-5/8	35-5/8	21-5/8	58
19.9	CMR20120	2000	120	30-1/2	34-1/4	23-1/2	61
19.9	CMR20230	3000	240	30-1/2	34-1/2	23-1/2	61

Water heaters furnished with standard 240 or 120 volt AC, single phase non-simultaneous wiring and 4500 watt upper and lower heating elements. 3000 and 3800 watt elements are also available. If heating elements of different wattages than those shown are demanded, they must be specifically requested. For height to top and T&P and heat traps add 3-1/2" to the height to water connection. Maximum test pressure: 300 PSI. Maximum working pressure: 150 PSI.