

Richmond® *Encore*® S/SR-Series

Super High Efficiency Condensing
Tankless Gas Water Heaters

THE NEW STANDARD IN TANKLESS



These products meet a stringent set of our company's internally defined sustainability standards.

Richmond®
The Water Heater Experts™

DELIVERING MORE OF WHAT YOU WANT

Now, it's easier than ever to give homeowners an advanced, continuous hot water solution with the new Richmond® Encore® S- and SR-Series Condensing Tankless Water Heaters. They're intelligently designed for compatibility with many applications, offer uncomplicated installations and service, and are backed by unmatched support.

ONE UNIT FOR INDOOR OR
OUTDOOR INSTALLATION*

*Outdoor kit required

LONG PVC VENT RUNS AND
FLEX VENT CAPABILITY
(Up to 50')

**COMPACT, SPACE-
SAVING** DESIGN

RICHMOND'S MOST EFFICIENT
GAS WATER HEATER¹

CONTINUOUS HOT WATER
(Built-in Recirculation Pump
-SR-Series only)

ONE UNIT FOR BOTH
NATURAL GAS AND
LP APPLICATIONS
(Gas conversion kit included)

INTEGRATED FULL-TEXT
DIGITAL CONTROLS
(With EcoNet® capability built-in
on SR-Series)

RELIABLE
TEMPERATURE CONTROL
(Can be adjusted for any household use)



EASY TO INSTALL. EASY TO SERVICE. **EASY TO SELL.**



Faster Servicing

Disassemble with a single
Phillips screwdriver for
faster servicing



Maintenance Notice Setting


Get service reminders to maintain
optimal performance—
customizable alert is based on
water quality and maintenance
frequency (set at 500,
750 or 1,000 hours)



Reduced Callbacks

Integrated full text display means
no more DIP switches to adjust
and confidence that the unit is up
and running before you leave

HOW A RICHMOND® ENCORE® SR-SERIES SUPER HIGH EFFICIENCY CONDENSING TANKLESS GAS WATER HEATER WORKS

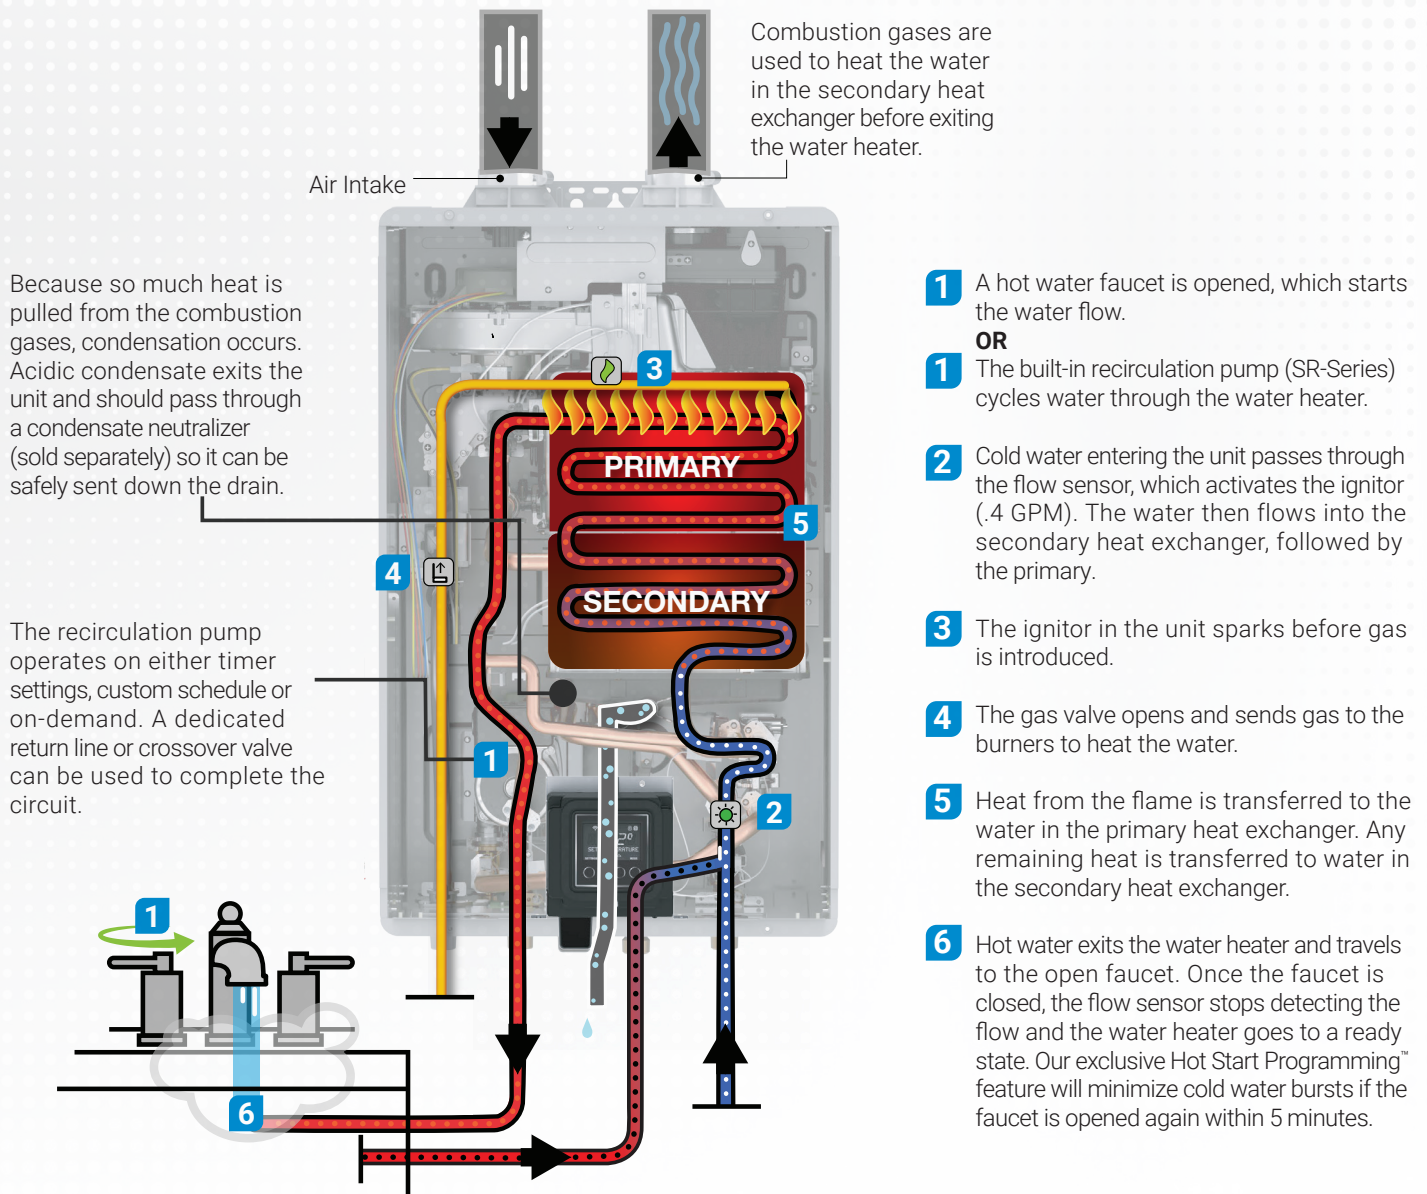

Built-in Recirculation Pump (SR-Series)

Helps save up to 12,000 gallons of water from being wasted down the drain annually

that's over **\$1,000**
in water costs over
15 years²

SMALL IN SIZE. BIG ON PERFORMANCE.

Super High Efficiency

Richmond's most efficient gas water heater – 0.96 UEF¹

High-Altitude Compliant

Up to 10,200 feet³

Exclusive Hot Start Programming™

No need for a buffer tank! Eliminates cold water bursts for continuous hot water even in stop and start situations.

More Reliable Temperatures



Best-in-Class Turn Down Ratio (TDR)¹ means Richmond® SR-Series can achieve tighter control over temperature output even during lower demand.

Extra Durability

Dual stainless steel condensing heat exchanger with down-fire pre-mix burner is designed to last and backed by the industry's most comprehensive 15-year warranty!

Enhanced Safety

Exclusive Overheat Film Wrap feature is designed to shut down the system in the event that the heat exchanger overheats.

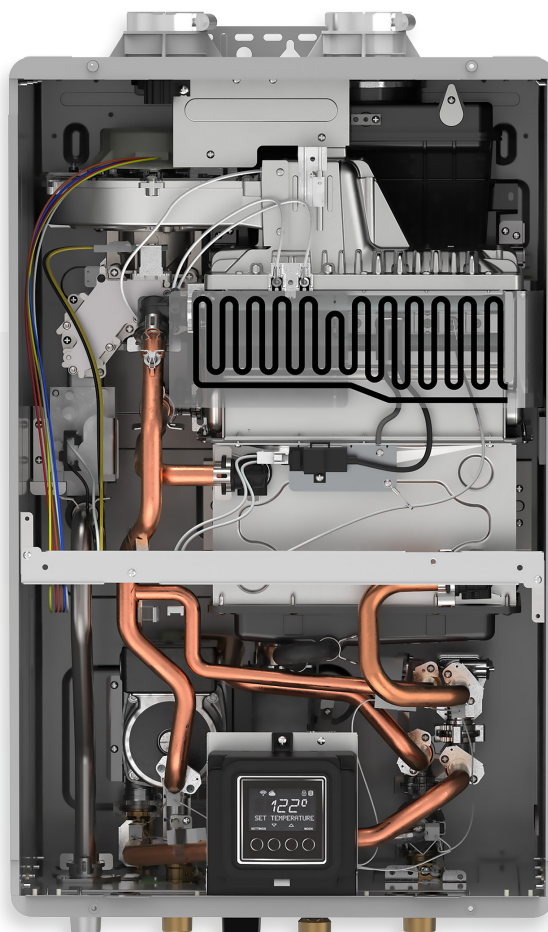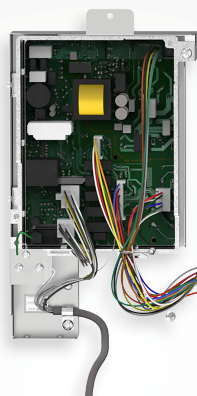

Saves Money & Energy

Richmond's most efficient gas water heater leads to big energy cost savings

Up to 36% in
energy costs
per year⁴



Outdoor Conversion Kit Available
Part number: RTGH-SX

ENERGY EFFICIENT. ENVIRONMENTALLY FRIENDLY.


Shower, do the dishes, and wash the laundry—all while improving air quality by reducing greenhouse gas NOx emissions⁵ up to 65% for a cleaner environment.

Uses up to 36%⁵ less energy than a 50-gallon tank to help minimize your impact on the environment.

NOT JUST BETTER, SMARTER.

Built-in EcoNet® Wi-Fi (SR-Series) lets homeowners optimize Richmond® SR-Series Condensing Tankless from their smart phone. Control temperature and recirculation modes and receive important information alerts like:

- Mobile alerts for notifications / maintenance reminders⁶
- Energy and water usage reports

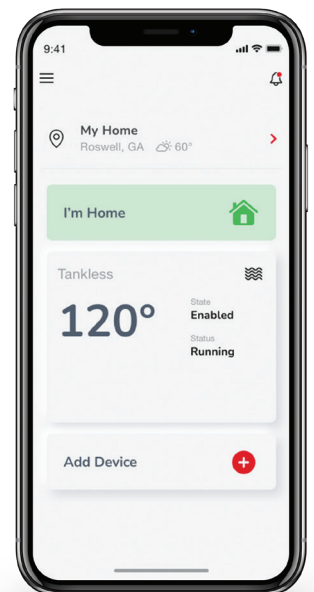

These products meet a stringent set of our company's internally defined sustainability standards.



FITS IN MORE PLACES & **TIGHT SPACES**

Install Where You Need To

Richmond® Encore® S- and SR-Series Condensing Tankless provide maximum install flexibility with its compact size and industry-best 1/2" side to side clearance¹

Use In More Regions

Richmond® Encore® S- and SR-Series Condensing Tankless are ready for more climates and landscapes with high altitude compatibility

Tank to Tankless Upgrades Made Easy

Longer vent runs, ability to use room air, ability to flex vent in existing B-vent and ability to run on a 1/2" gas line allow for a cleaner, faster and easier installation

Common Vent

Can common vent two tankless units for fewer wall penetrations making it easier to install and offering more flexible options



**BUILT-IN
RECIRCULATION
SETTINGS**

Select from 3 settings on the SR-Series:

- Timer Based (Performance or Energy Saver)
- Custom Schedule (operates in Performance mode during select times)
- On-demand

ROOM AIR INTAKE FOR GREATER FLEXIBILITY




Richmond® Encore® S- and SR-Series Condensing Tankless can be installed either with direct vent (outside air) or non-direct vent (room air) intake. Room air intake allows maximum installation flexibility in an open area like a basement or garage, as well as in smaller spaces like a closet with full louvered door.

Room air volume must meet the National Fuel Gas Code, ANSI Z223.1 /NFPA 54. When minimum room air volume is not available, install direct venting. Consult with the product use and care manual for venting and air intake requirements.


DESIGNED TO MAKE YOUR JOB EASIER

The quick hang sliding bracket system is designed to make one-person installations safe and simple. Just mount the hanging bracket to the wall, slide the unit on to align it and secure at top and bottom.

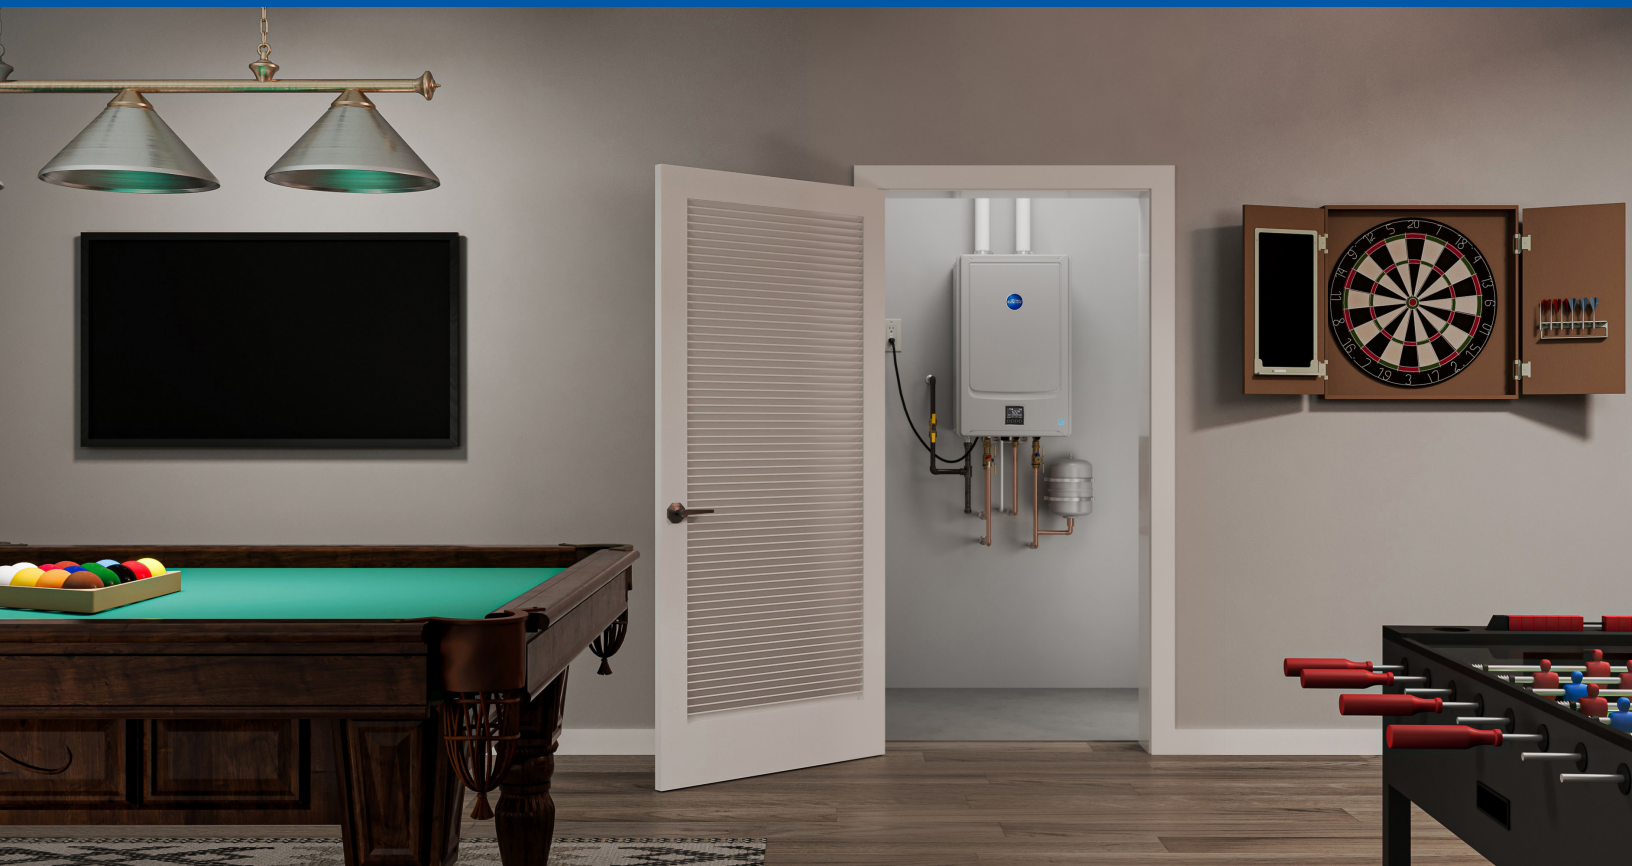




HELP YOUR CUSTOMERS START SAVING TODAY

Learn more at
RichmondWaterHeaters.com/MoreHotWater
or ask your local distributor



Richmond® Encore® S- and SR Series Tankless Specifications

Richmond Model Number		RMTGHS84iN (P) RMTGHSR84iN (P)	RMTGHS10iN (P) RMTGHSR10iN (P)	RMTGH-S11iN (P) RMTGH-SR11iN (P)
Gas Input Rate	MAX	157,000 BTU/h	180,000 BTU/h	199,900 BTU/h
	MIN	11,000 BTU/h	11,000 BTU/h	11,000 BTU/h
Uniform Energy Factor (UEF)		0.96		
Gallons Per Minute (GPM)	MAX (35°F)	8.4	10.1	11.2
	45°F Rise	6.9	7.9	8.8
	67°F Rise	4.6	5.3	5.9
Number of Bathrooms ⁷				
Temp. Range		85°F - 140°F		
Temp. Setting from Factory		120°F		
Installation Type		Indoor (Outdoor Conversion Kit sold separately: RTGH-SX)		
Heat Exchanger Material		Primary: Stainless Steel – Secondary: Stainless Steel		
Minimum Activation Flow		0.4 GPM		
Minimum Continuous Flow		0.26 GPM		
Maximum Altitude		10,200 ft.		
Ultra Low NOx		Meets 14 ng/J NOx requirements – SCAQMD Rule 1146.2 compliant		
Warranty		15 Year Heat Exchanger 5-Year Parts 1-Year Labor		

CONTACT US

**Customer Service,
Warranty and Parts:**
800.621.5622

Technical Service:
800.HEATER3
(800.432.8373)

EcoNet® Support:
800.255.2388

**Plumber Support
Group:**
866.339.2388



¹Based on comparison of Richmond® S/SR Series Super High Efficiency Condensing Tankless models against similar models from leading tankless competitors. ²Based on continuous built-in recirculation pump (SR-Series only, S-Series compatible with external pump accessory) compared to average water loss of residential water piping. ³Please refer to the Use & Care Manual for additional details and instructions. ⁴Based on comparison of Richmond® S/SR Series Super High Efficiency Condensing Tankless models against standard residential 50-gallon tank type model with like fuel type. Savings for Liquid Propane models may be higher. ⁵Based on reduction in energy usage comparison of Richmond® S/SR Series Super High Efficiency Condensing Tankless models against standard residential atmospheric 50-gallon tank type model with like fuel type, not to exceed 75,000 BTU. ⁶Wi-Fi broadband internet connection required. Download the EcoNet® App from the App Store® or Google Play® to set up your EcoNet Smart Thermostat. Receipt of notifications depend on home Wi-Fi set up. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. ⁷Based on simultaneous showers using 2.5 GPM flow rate pre-mixed with cold water line. Flow rates vary depending on temperature of incoming cold water and water heater set temperature. Refer to flow rate curves for accurate sizing.

©Rheem Manufacturing Company 2022. Unless indicated otherwise, trademarks are owned by Rheem Manufacturing Company and its affiliates. Use of trademarks and marketing claims have been approved by Rheem legal. In keeping with its policy of continuous progress & program improvement, Richmond reserves the right to make changes without notice.

Printed in the USA • WP • Form No. 06.25-RM-SR-BRO