




Professional Achiever Plus™ electric water heaters are engineered for longer life – resisted heating elements and premium grade anode rod

Efficiency

- Standby watts loss 61 - 80
- Isolated tank design reduces conductive heat loss
- Resisted copper upper element and resisted Lifeguard™ stainless steel lower element to prolong anode rod and tank life



Performance

- FHR: 42 - 99 US gallons, based on gallon capacity
- Recovery rate is 21 US gallons at a 90 degree Fahrenheit rise

Longer Life

- Premium grade anode rod provides long-lasting tank protection

Features

- Electric junction box located above heating elements for easy installation
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature

Plus...

- EverKleen™ self cleaning device fights harmful sediment build-up with a high-velocity spiraling water stream – helps operating efficiency by saving energy, money and improving tank life
- Enhanced-flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant

Warranty

- 8-Year limited tank and parts warranty*
- With ProtectionPlus™ the 8-year limited tank warranty becomes 12-year ProtectionPlus™ – order part number SP20904 (6 pack only)
- With ProtectionPlus™ the 8-year limited tank warranty becomes 10-year ProtectionPlus™ – order part number SP20081 (6 pack only)

*See Residential Warranty Certificate for complete information



Professional Achiever Plus™
40 and 60-Imperial Gallon Capacities

208 and 240 Volt AC/Single Phase
Double Element Models
Electric



See dimensions chart on back.

In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.

Professional Achiever Plus™ Water Heaters




MODEL NUMBER	DESCRIPTION				FEATURES						ROUGHING IN DIMENSIONS					
	STORAGE CAPACITY			ELEM. QTY	120 VOLT		208 VOLT		240 VOLT		HEIGHT (IN.) A	OUTSIDE DIAMETER (IN) B	HEIGHT TO DRAIN VALVE (IN) C	ESTIMATED SHIP WEIGHT		STANDBY WATT LOSS
	USG	IMP. GALS	LITRES		WATT	AMPS.	WATT	AMPS.	WATT	AMPS.				LBS.	KG	
PRO+E40 M2 CD61	45	39	178	2	N/A	N/A	2855	13.7	3800	15.8	48	21-3/4	3-1/2	117	53	61
PRO+E40 M2 CD61	45	39	178	2	N/A	N/A	N/A	N/A	6000	25	48	21-3/4	3-1/2	117	53	61
PRO+E60 T2 CD80	72	63	285	2	N/A	N/A	N/A	N/A	4500	18.8	59.55	23-3/4	3-1/2	176	80	80
PRO+E60 T2 CD80	72	63	285	2	N/A	N/A	3380	16.3	4500	18.8	59.55	23-3/4	3-1/2	176	80	80

- Special Wiring Options – A limited number of special wiring options are available. Consult factory for price and availability.
- All models equipped with heat traps.
- Complies with ON/BC/QC energy efficiency requirements. ON/BC/QC 40 imperial gallon top inlet models will have side T&P.

**Recovery = wattage/2.42 x temp. rise °F.
 Example: $\frac{4500W}{2.42 \times 90^\circ} = 21 \text{ GPH}$

**Recovery calculations used are based on 4500 watt elements used in non-simultaneous operation.

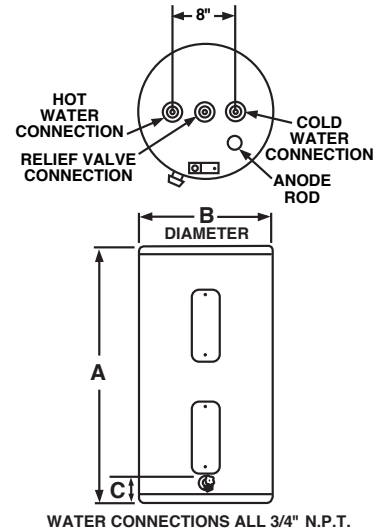

In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.