




## Professional Achiever™ electric water heaters are engineered for longer life – resistored heating elements and premium grade anode rod

### Efficiency

- Standby watts loss 61 - 80
- Isolated tank design reduces conductive heat loss
- Resistored copper upper element and resistored Lifeguard™ stainless steel lower element to prolong anode rod and tank life



### Performance

- FHR: 42 - 99 US gallons, based on gallon capacity
- Recovery rate is 21 US gallons at a 90 degree Fahrenheit rise

### Longer Life

- Premium grade anode rod provides long-lasting tank protection

### Features

- Electric junction box located above heating elements for easy installation
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature

### Plus...

- EverKleen™ self cleaning device fights harmful sediment build-up with a high-velocity spiraling water stream – helps operating efficiency by saving energy, money and improving tank life
- Enhanced-flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant

### Warranty

- 6-Year limited tank and parts warranty\*
- With ProtectionPlus™ the 6-year limited tank warranty becomes 10-year ProtectionPlus™ – order part number SP20904 (6 pack only)
- With ProtectionPlus™ the 6-year limited tank warranty becomes 8-year ProtectionPlus™ – order part number SP20081 (6 pack only)

\*See Residential Warranty Certificate for complete information



## Professional Achiever™

40 and 60-Imperial Gallon Capacities  
208 and 240 Volt AC/Single Phase Double Element Models Electric



See dimensions chart on back.

*In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.*

# Professional Achiever™ Water Heaters



DESCRIPTION					FEATURES						ROUGHING IN DIMENSIONS					
MODEL NUMBER	STORAGE CAP.			ELEM. QTY.	120 VOLT		HEATING ELEMENTS		240 VOLT		HEIGHT (IN.) A	OUTSIDE DIAMETER (IN) B	HEIGHT TO DRAIN VALVE (IN) C	ESTIMATED SHIP. WEIGHT		STANDBY WATTS LOSS
	USG	IMP. GALS.	LITRES		WATT.	AMPS.	208 VOLT WATT.	AMPS.	WATT.	AMPS.				LBS.	KG	
<b>TOP INLET</b>																
PROE40 M2 CD61†	45	39	178	2	N/A	N/A	N/A	N/A	3000	12.5	48	21-3/4	3-1/2	117	53	61
PROE40 M2 CD61†	45	39	178	2	N/A	N/A	3380	16.3	4500	18.8	48	21-3/4	3-1/2	117	53	61
PROE60 T2 CD80†	72	63	285	2	N/A	N/A	3380	16.3	4500	18.8	59.55	23-3/4	3-1/2	176	80	80


• Special Wiring Options – A limited number of special wiring options are available. Consult factory for price and availability.

• All models equipped with heat traps.

† Complies with ON/BC/QC energy efficiency requirements. ON/BC/QC 40 imperial gallon top inlet models will have side T&P.

\*\*Recovery = wattage/2.42 x temp. rise °F.  
 Example: 4500W = 21 GPH  
 2.42 x 90°

\*\*Recovery calculations used are based on 4500 watt elements used in non-simultaneous operation.

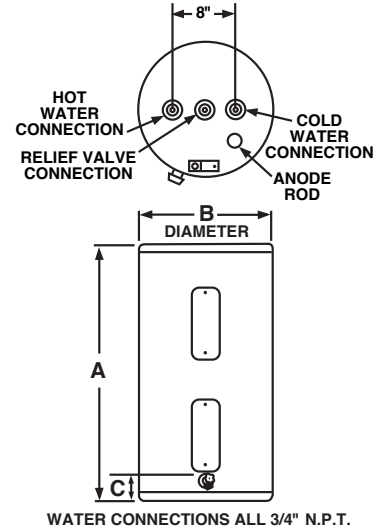

In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.

Ruud Canada • 125 Edgeware Road, Unit 1 • Brampton, Ontario L6Y 0P5 • www.ruud-canada.ca