


RELY ON



Endeavor® Line *Achiever Plus*® Series iR Residential Packaged Dedicated Horizontal Heat Pumps

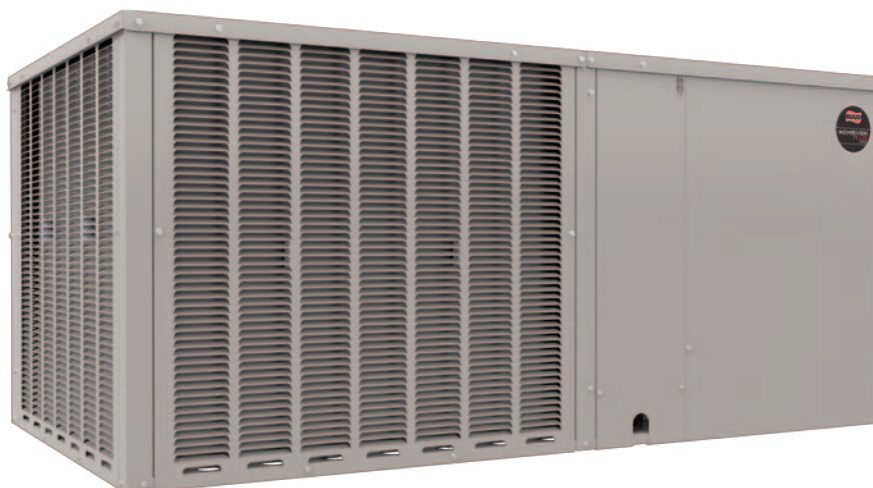

RHPBYC Series

Nominal Sizes: 2 to 5 Tons [7.0 to 17.6 kW]

Cooling Efficiency up to: 15.2 SEER2

Heating Efficiency up to: 7.2 HSPF2

Refrigerant Type: R-454B



TABLE OF CONTENTS

Unit Features and Benefits3

Model Number Identification4

General Data5

General Data Notes6

Gross Systems Performance Date7-12

Indoor Airflow Performance.....13

Electrical Data14

Electric Heater Kits.....15

Dimensional Data.....16

Typical Installations17

Limited Warranty18

FEATURES AND BENEFITS

- **Two-Stage Scroll Compressors on all Models:** Provides maximum efficiency and quiet operation
- **Two Thermal Expansion Valves:** One for cooling, one for heating and are standard on all models for precise superheat control, reliability, and energy efficiency at all operating conditions
- **High and Low Pressure Controls:** Standard on all models for refrigerant component protection and reliability
- **Filter Drier:** Standard on all models
- **100% Factory Run Tested**
- **Tinned Indoor Coil:** Available as factory-installed option for better formicary corrosion resistance
- **PlusOne® Refrigerant Detection System™:** An integrated one-box, patented design featuring the A2L sensor and mitigation board, offering easier commissioning with a single component and simplified wiring configuration, compatibility with any 24V thermostat application and system protection by automatically pausing outdoor unit operation – if excess refrigerant is detected
- **Metal Base Rails:** Allow for separation between the unit base and the ground level, protecting the base from ground moisture and providing air circulation around the unit. It also allows for easier maneuverability during installation. To provide flexibility in space limited installations, the unit can be installed flush to the structure without blocking airflow over the outdoor coil or making any screws inaccessible for maintenance
- **Two Round 14" Duct Collars:** Included with each unit. The collar is crimped around the leading edge, making it easier to install duct onto the collar. A metal bead around the circumference prevents the attached ducting from sliding off after installation
- **Easy High and Low Refrigerant Pressure Measurement:** Two gauge ports located inside the control box allow for ease and accuracy
- **Removable Sloped Drain Pan:** Accessible through a small side panel. Helps to ensure indoor air quality (IAQ) throughout the life of the unit
- **Closed-Cell Insulation:** Used on the base of the unit, to prevent moisture from being absorbed and helps reduce mold content
- **Louvered Condenser Compartment:** Protects the coil against yard hazards and/or weather extremes
- **Easy Accessible Controls:**
 - Located in a large control box providing plenty of space for troubleshooting
 - Demand defrost control is used to manage the defrost cycle
 - Transformer is protected by an in-line fuse, which protects the transformer during a low-voltage electrical short
 - Low-voltage and high-voltage wiring connections are easily accessed and have ample room to maneuver
 - Number and color-coded wiring aids in troubleshooting and corresponds with the large, easy-to-read wiring diagram located on the inside of the control box access panel
- **Easily Removable Outdoor and Indoor Section Top Cover:** Allows access to the compressor, refrigerant tubing, blower housing and motors for easy required cleaning and service
- **Factory and Field Installed Supplemental Electric Heat Strips:** Available for periods of extreme cold temperatures with either dual or single-point power
- **Designing for Sustainability with Low GWP:** For 2025, the Environmental Protection Agency (EPA) has set a global warming potential (GWP) limit of 700 for refrigerant used in heating and cooling systems. This new requirement will result in a 78%¹ lower GWP than previous-generation refrigerants with only minimal changes to system installation. For us, this is another step toward our continued sustainability goal of reducing greenhouse gas emissions, while still delivering an exceptional level of energy efficient, dependable comfort

¹When comparing the GWP of A2L refrigerants R-454B to R-410A refrigerant.

Heat Pumps

<u>R</u>	<u>HP</u>	<u>B</u>	<u>Y</u>	<u>C</u>	<u>024</u>	<u>A</u>	<u>J</u>	<u>T</u>	<u>00</u>	<u>0</u>	<u>N</u>	<u>A</u>
Brand	Product Category	Platform	Refrigerant	Tier	Capacity BTU/HR	Major Series	Voltage	Drive	Electric Heat	Electric Heat Configuration	Control	Minor Series
R - Ruud	HP - Heat Pump	B - ResiPack Dedicated Horizontal	Y - R-454B	C - Mid Tier (15.2 SEER2)	024 - 24K BTUH [7.03 kW] 036 - 36K BTUH [10.55 kW] 048 - 48K BTUH [14.07 kW] 060 - 60K BTUH [17.58 kW]	A - 1st Design Series	J - 1ph, 208/230/60	T - Constant Torque	00 - No Electric Heat 10 - 10 kW Electric Heat 15 - 15 kW Electric Heat 20 - 20 kW Electric Heat	0 - No Electric Heat 1 - Electric Heat Factory Installed	N - Non-Comm.	A - 1st Design

[] Designates Metric Conversions

Available Models
RHPBYC024AJT000NA
RHPBYC024AJT101NA
RHPBYC036AJT000NA
RHPBYC036AJT101NA
RHPBYC048AJT000NA
RHPBYC048AJT151NA
RHPBYC060AJT000NA
RHPBYC060AJT201NA

NOTE: Further heater kits available to purchase for field installation.
Tinned evaporator coil options (AUA) also available.

NOMINAL SIZES 2-5 TONS [7-17.6 kW]

Model RHPBYC Series	024AJT	036AJT	048AJT	060AJT
Cooling Performance¹				
Nominal Cooling Capacity Btu/h [kW]	24,000 [7.03]	36,000 [10.55]	48,000 [14.06]	60,000 [17.58]
EER2/SEER2 ²	11.5/15.0	11.5/15.2	11.0/15.2	11.0/15.2
Nominal CFM/AHRI Rated CFM [L/s]	800/750 [378/354]	1275/1200 [602/566]	1400/1400 [661/661]	1850/1800 [873/850]
AHRI Net Cooling Capacity Btu/h [kW]	22,800 [6.68]	34,200 [10.02]	46,000 [13.48]	56,500 [16.56]
Net Sensible Capacity Btu/h [kW]	17,586 [5.15]	27,201 [7.97]	34,809 [10.20]	42,532 [12.46]
Net Latent Capacity Btu/h [kW]	5,214 [1.53]	6,999 [2.05]	11,191 [3.28]	13,968 [4.09]
Net System Power [kW]	1.85	2.88	4.08	5.17
Heating Performance (Heat Pumps)³				
High Temp. Btu/h [kW] Rating	22,600 [6.62]	34,000 [9.96]	45,500 [13.33]	56,500 [16.56]
High System Power COP	3.42	3.69	3.39	3.6
Low Temp. BTU/h [kW] Rating	12,000 [3.52]	17,900 [5.25]	26,400 [7.74]	35,000 [10.26]
High System Power COP	2.19	2.33	2.26	2.42
HSPF2 (Btu/h/Watts-h)	6.7	7.2	7.2	7.2
Compressor				
No./Type	1/2/scroll	1/2/scroll	1/2/scroll	1/2/scroll
Outdoor Sound Rating (dB)⁴				
	69	71	80	87
Outdoor Coil—Fin Type				
Tube Type	Rheem 3/8 Louver	Rheem 3/8 Louver	Rheem 3/8 Louver	Rheem 3/8 Louver
Rifled: Tube Size OD or MicroChannel: Depth in. [mm]	Rifle 1840	Rifle 1840	Rifle 1840	Rifle 1840
Face Area sq. ft. [sq. m]	0.375 [9.53]	0.375 [9.53]	0.375 [9.53]	0.375 [9.53]
Rows / FPI [FPcm]	2 / 18 [7]	2 / 18 [7]	2 / 18 [7]	2 / 18 [7]
Indoor Coil - Fin Type				
Tube Type	Rheem 3/8 Louver	Rheem 3/8 Louver	Rheem 3/8 Louver	Rheem 3/8 Louver
Rifled: Tube Size OD or MicroChannel: Depth in. [mm]	Rifle 1840	Rifle 1840	Rifle 1840	Rifle 1840
Face Area sq. ft. [sq. m]	0.375 [9.53]	0.375 [9.53]	0.375 [9.53]	0.375 [9.53]
Rows / FPI [FPcm]	5.8 [0.54]	5.8 [0.54]	5.8 [0.54]	5.8 [0.54]
Refrigerant Control	TXV	TXV	TXV	TXV
Drain Connection No./Size in. [mm]	3 / 13 [5]	3 / 13 [5]	4 / 13 [5]	4 / 13 [5]
Outdoor Fan - Type				
No. Used/Diameter in. [mm]	Propeller	Propeller	Propeller	Propeller
Drive Type/No. Speeds	1/24.0 [609.6]	1/24.0 [609.6]	1/24.0 [609.6]	1/24.0 [609.6]
CFM [L/s]	Direct/1	Direct/1	Direct/2	Direct/2
No. Motors/HP	2700 [1274]	3000 [1416]	3000/4400 [1416/2077]	3000/4400 [1416/2077]
Motor RPM	1 at 1/3	1 at 1/3	1 at 1/2	1 at 1/2
	750	825	710/1010	750/1050
Indoor Fan - Type				
No. Used/Diameter in. [mm]	Constant Torque	Constant Torque	Constant Torque	Constant Torque
Drive Type	1/12x9 [305x229]	1/12x9 [305x229]	1/12x9 [305x229]	1/12x9 [305x229]
No. Speeds	Direct	Direct	Direct	Direct
No. Motors	Multiple Speed	Multiple Speed	Multiple Speed	Multiple Speed
Motor HP	1	1	1	1
Motor RPM	1/2	3/4	3/4	1
Motor Frame Size	1050	1050	1050	1050
	48	48	48	48
Filter - Type				
Furnished	Field Supplied	Field Supplied	Field Supplied	Field Supplied
(NO.) Size Recommended in. [mm x mm x mm]	No	No	No	No
	(0) 1 x24x24 [25x609x609]	(0) 1x24x24 [25x609x609]	(0) 1x24x24 [25x609x609]	(0) 1x24x24 [25x609x609]
Refrigerant Charge Oz. [g]				
	195.4 [5538.4]	179.3 [5083.1]	187.2 [5307.0]	192.0 [5443.1]
Weights				
Net Weight lbs. [kg]	330 [149.7]	350 [158.8]	430 [195]	430 [195]
Ship Weight lbs. [kg]	355 [161]	375 [170.1]	455 [206.4]	455 [206.4]

See Page 6 for Notes.

[] Designates Metric Conversions

NOTES:

1. Cooling Performance is rated at 95°F ambient, 80°F entering dry bulb, 67°F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to $\pm 20\%$ of nominal CFM. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
2. EER2 and/or SEER2 are rated at AHRI conditions and in accordance with DOE test procedures.
3. HSPF2 is rated at AHRI conditions and in accordance with DOE test procedures.

GROSS SYSTEMS COOLING PERFORMANCE DATA—RHPBYC024

RHPBYC024 - ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			950 [448]	800 [378]	725 [342]	950 [448]	800 [378]	725 [342]	950 [448]	800 [378]	725 [342]
DR ①			.05	.09	.12	.05	.09	.12	.05	.09	.12
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	31.6 [9.3] 20.0 [5.9] 1.5	30.5 [8.9] 18.4 [5.4] 1.5	30.0 [8.8] 17.6 [5.2] 1.5	29.0 [8.5] 21.9 [6.4] 1.5	28.0 [8.2] 20.1 [5.9] 1.5	27.6 [8.1] 19.2 [5.6] 1.5	27.1 [7.9] 24.4 [7.2] 1.5	26.2 [7.7] 22.5 [6.6] 1.5	25.8 [7.6] 21.5 [6.3] 1.4
	80 [26.7]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	30.9 [9.1] 19.8 [5.8] 1.6	29.9 [8.8] 18.2 [5.3] 1.6	29.3 [8.6] 17.4 [5.1] 1.5	28.3 [8.3] 21.7 [6.4] 1.6	27.4 [8.0] 19.9 [5.8] 1.6	26.9 [7.9] 19.0 [5.6] 1.5	26.4 [7.7] 24.2 [7.1] 1.6	25.5 [7.5] 22.2 [6.5] 1.5	25.1 [7.4] 21.3 [6.2] 1.5
	85 [29.4]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	30.1 [8.8] 19.5 [5.7] 1.7	29.1 [8.5] 17.9 [5.2] 1.6	28.6 [8.4] 17.2 [5.0] 1.6	27.6 [8.1] 21.4 [6.3] 1.7	26.7 [7.8] 19.6 [5.7] 1.6	26.2 [7.7] 18.8 [5.5] 1.6	25.7 [7.5] 23.9 [7.0] 1.7	24.8 [7.3] 22.0 [6.4] 1.6	24.4 [7.2] 21.0 [6.2] 1.6
	90 [32.2]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	29.3 [8.6] 19.2 [5.6] 1.8	28.4 [8.3] 17.6 [5.2] 1.7	27.9 [8.2] 16.8 [4.9] 1.7	26.8 [7.9] 21.0 [6.2] 1.8	25.9 [7.6] 19.3 [5.7] 1.7	25.5 [7.5] 18.5 [5.4] 1.7	24.9 [7.3] 23.6 [6.9] 1.7	24.1 [7.1] 21.7 [6.4] 1.7	23.6 [6.9] 20.7 [6.1] 1.7
	95 [35]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	28.5 [8.4] 18.8 [5.5] 1.9	27.5 [8.1] 17.2 [5.0] 1.8	27.1 [7.9] 16.5 [4.8] 1.8	25.9 [7.6] 20.6 [6.0] 1.9	25.1 [7.4] 19.0 [5.6] 1.8	24.6 [7.2] 18.1 [5.3] 1.8	24.0 [7.0] 23.2 [6.8] 1.8	23.2 [6.8] 21.3 [6.2] 1.8	22.8 [6.7] 20.4 [6.0] 1.8
	100 [37.8]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	27.6 [8.1] 18.3 [5.4] 2.0	26.7 [7.8] 16.8 [4.9] 1.9	26.2 [7.7] 16.1 [4.7] 1.9	25.0 [7.3] 20.1 [5.9] 2.0	24.2 [7.1] 18.5 [5.4] 1.9	23.8 [7.0] 17.7 [5.2] 1.9	23.1 [6.8] 22.7 [6.7] 1.9	22.3 [6.5] 20.9 [6.1] 1.9	22.0 [6.4] 19.9 [5.8] 1.9
	105 [40.6]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	26.6 [7.8] 17.8 [5.2] 2.1	25.7 [7.5] 16.3 [4.8] 2.0	25.3 [7.4] 15.6 [4.6] 2.0	24.0 [7.0] 19.6 [5.7] 2.1	23.2 [6.8] 18.0 [5.3] 2.0	22.8 [6.7] 17.2 [5.0] 2.0	22.1 [6.5] 22.1 [6.5] 2.1	21.4 [6.3] 20.4 [6.0] 2.0	21.0 [6.2] 19.5 [5.7] 2.0
	110 [43.3]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	25.6 [7.5] 17.2 [5.0] 2.2	24.7 [7.2] 15.8 [4.6] 2.1	24.3 [7.1] 15.1 [4.4] 2.1	23.0 [6.7] 19.0 [5.6] 2.2	22.2 [6.5] 17.5 [5.1] 2.1	21.9 [6.4] 16.7 [4.9] 2.1	21.1 [6.2] 21.1 [6.2] 2.2	20.4 [6.0] 19.8 [5.8] 2.1	20.1 [5.9] 19.0 [5.6] 2.1
	115 [46.1]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	24.5 [7.2] 16.5 [4.8] 2.3	23.7 [6.9] 15.2 [4.5] 2.3	23.3 [6.8] 14.5 [4.2] 2.2	21.9 [6.4] 18.4 [5.4] 2.3	21.2 [6.2] 16.9 [5.0] 2.3	20.8 [6.1] 16.2 [4.7] 2.2	20.0 [5.9] 20.0 [5.9] 2.3	19.3 [5.7] 19.2 [5.6] 2.2	19.0 [5.6] 18.4 [5.4] 2.2
	120 [48.9]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	23.3 [6.8] 15.8 [4.6] 2.4	22.6 [6.6] 14.5 [4.2] 2.4	22.2 [6.5] 13.9 [4.1] 2.4	20.8 [6.1] 17.7 [5.2] 2.4	20.1 [5.9] 16.2 [4.7] 2.4	19.7 [5.8] 15.5 [4.5] 2.4	18.9 [5.5] 18.9 [5.5] 2.4	18.2 [5.3] 18.2 [5.3] 2.4	17.9 [5.2] 17.8 [5.2] 2.3
	125 [51.7]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	22.1 [6.5] 15.0 [4.4] 2.5	21.4 [6.3] 13.8 [4.0] 2.5	21.0 [6.2] 13.2 [3.9] 2.5	19.6 [5.7] 16.9 [5.0] 2.5	18.9 [5.5] 15.5 [4.5] 2.5	18.6 [5.5] 14.8 [4.3] 2.5	17.7 [5.2] 17.7 [5.2] 2.5	17.1 [5.0] 17.1 [5.0] 2.5	16.8 [4.9] 16.8 [4.9] 2.5

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 Btu/h
Sens —Sensible capacity x 1000 Btu/h
Power —kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions

GROSS SYSTEMS COOLING PERFORMANCE DATA—RHPBYC036

RHPBYC036 - ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1350 [637]	1300 [637]	1050 [496]	1350 [637]	1300 [637]	1050 [496]	1350 [637]	1300 [637]	1050 [496]
DR ①			.05	.09	.12	.05	.09	.12	.05	.09	.12
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	43.7 [12.8] 25.7 [7.5] 2.4	43.4 [12.7] 25.2 [7.4] 2.4	41.9 [12.3] 23.0 [6.7] 2.4	40.5 [11.9] 31.2 [9.1] 2.4	40.2 [11.8] 30.7 [9.0] 2.4	38.8 [11.4] 27.9 [8.2] 2.3	38.2 [11.2] 38.2 [11.2] 2.4	37.9 [11.1] 37.5 [11.0] 2.4	36.6 [10.7] 34.1 [10.0] 2.3
	80 [26.7]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	42.8 [12.5] 25.4 [7.4] 2.5	42.5 [12.5] 24.9 [7.3] 2.5	41.0 [12.0] 22.7 [6.7] 2.5	39.6 [11.6] 31.0 [9.1] 2.5	39.4 [11.5] 30.4 [8.9] 2.5	38.0 [11.1] 27.7 [8.1] 2.5	37.3 [10.9] 37.3 [10.9] 2.5	37.1 [10.9] 37.1 [10.9] 2.5	35.8 [10.5] 33.9 [9.9] 2.4
	85 [29.4]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	41.8 [12.3] 25.0 [7.3] 2.7	41.6 [12.2] 24.6 [7.2] 2.6	40.1 [11.8] 22.4 [6.6] 2.6	38.7 [11.3] 30.6 [9.0] 2.6	38.4 [11.3] 30.1 [8.8] 2.6	37.1 [10.9] 27.4 [8.0] 2.6	36.4 [10.7] 36.4 [10.7] 2.6	36.1 [10.6] 36.1 [10.6] 2.6	34.8 [10.2] 33.6 [9.8] 2.6
	90 [32.2]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	40.8 [12.0] 24.6 [7.2] 2.8	40.5 [11.9] 24.2 [7.1] 2.8	39.1 [11.5] 22.0 [6.4] 2.7	37.6 [11.0] 30.2 [8.9] 2.8	37.3 [10.9] 29.7 [8.7] 2.7	36.0 [10.6] 27.0 [7.9] 2.7	35.3 [10.3] 35.3 [10.3] 2.7	35.0 [10.3] 35.0 [10.3] 2.7	33.8 [9.9] 33.2 [9.7] 2.7
	95 [35]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	39.6 [11.6] 24.2 [7.1] 2.9	39.3 [11.5] 23.7 [6.9] 2.9	38.0 [11.1] 21.6 [6.3] 2.9	36.4 [10.7] 29.7 [8.7] 2.9	36.2 [10.6] 29.2 [8.6] 2.9	34.9 [10.2] 26.6 [7.8] 2.8	34.1 [10.0] 34.1 [10.0] 2.9	33.9 [9.9] 33.9 [9.9] 2.9	32.7 [9.6] 32.7 [9.6] 2.8
	100 [37.8]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	38.4 [11.3] 23.6 [6.9] 3.1	38.1 [11.2] 23.2 [6.8] 3.0	36.8 [10.8] 21.1 [6.2] 3.0	35.2 [10.3] 29.2 [8.6] 3.0	34.9 [10.2] 28.7 [8.4] 3.0	33.7 [9.9] 26.1 [7.6] 3.0	32.9 [9.6] 32.9 [9.6] 3.0	32.7 [9.6] 32.7 [9.6] 3.0	31.5 [9.2] 31.5 [9.2] 3.0
	105 [40.6]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	37.0 [10.8] 23.1 [6.8] 3.2	36.8 [10.8] 22.7 [6.7] 3.2	35.5 [10.4] 20.6 [6.0] 3.1	33.9 [9.9] 28.6 [8.4] 3.2	33.6 [9.8] 28.1 [8.2] 3.2	32.4 [9.5] 25.6 [7.5] 3.1	31.5 [9.2] 31.5 [9.2] 3.2	31.3 [9.2] 31.3 [9.2] 3.2	30.2 [8.9] 30.2 [8.9] 3.1
	110 [43.3]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	35.6 [10.4] 22.4 [6.6] 3.4	35.3 [10.3] 22.0 [6.4] 3.4	34.1 [10.0] 20.1 [5.9] 3.3	32.4 [9.5] 28.0 [8.2] 3.3	32.2 [9.4] 27.5 [8.1] 3.3	31.1 [9.1] 25.0 [7.3] 3.3	30.1 [8.8] 30.1 [8.8] 3.3	29.9 [8.8] 29.9 [8.8] 3.3	28.8 [8.4] 28.8 [8.4] 3.3
	115 [46.1]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	34.1 [10.0] 21.7 [6.4] 3.5	33.8 [9.9] 21.4 [6.3] 3.5	32.6 [9.6] 19.4 [5.7] 3.5	30.9 [9.1] 27.3 [8.0] 3.5	30.7 [9.0] 26.8 [7.9] 3.5	29.6 [8.7] 24.4 [7.2] 3.4	28.6 [8.4] 28.6 [8.4] 3.5	28.4 [8.3] 28.4 [8.3] 3.5	27.4 [8.0] 27.4 [8.0] 3.4
	120 [48.9]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	32.4 [9.5] 21.0 [6.2] 3.7	32.2 [9.4] 20.6 [6.0] 3.7	31.1 [9.1] 18.8 [5.5] 3.6	29.3 [8.6] 26.6 [7.8] 3.7	29.1 [8.5] 26.1 [7.6] 3.7	28.0 [8.2] 23.7 [6.9] 3.6	27.0 [7.9] 27.0 [7.9] 3.7	26.8 [7.9] 26.8 [7.9] 3.7	25.8 [7.6] 25.8 [7.6] 3.6
	125 [51.7]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	30.7 [9.0] 20.2 [5.9] 3.9	30.5 [8.9] 19.8 [5.8] 3.9	29.4 [8.6] 18.0 [5.3] 3.8	27.5 [8.1] 25.7 [7.5] 3.9	27.4 [8.0] 25.3 [7.4] 3.9	26.4 [7.7] 23.0 [6.7] 3.8	25.2 [7.4] 25.2 [7.4] 3.9	25.1 [7.4] 25.1 [7.4] 3.8	24.2 [7.1] 24.2 [7.1] 3.8

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 Btu/h
Sens —Sensible capacity x 1000 Btu/h
Power —kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 - DR) x (dbE - 80)].

[] Designates Metric Conversions

GROSS SYSTEMS COOLING PERFORMANCE DATA—RHPBYC048

RHPBYC048 - ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1775 [838]	1425 [673]	1375 [649]	1775 [838]	1425 [673]	1375 [649]	1775 [838]	1425 [673]	1375 [649]
DR ①			.05	.09	.12	.05	.09	.12	.05	.09	.12
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	61.1 [17.9] 35.9 [10.5] 3.6	58.5 [17.1] 32.2 [9.4] 3.5	58.1 [17.0] 31.7 [9.3] 3.5	57.8 [16.9] 43.5 [12.7] 3.5	55.4 [16.2] 39.0 [11.4] 3.4	55.0 [16.1] 38.3 [11.2] 3.4	54.6 [16.0] 49.9 [14.6] 3.4	52.3 [15.3] 44.8 [13.1] 3.4	51.9 [15.2] 44.1 [12.9] 3.4
	80 [26.7]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	59.1 [17.3] 34.8 [10.2] 3.7	56.5 [16.6] 31.2 [9.1] 3.7	56.2 [16.5] 30.7 [9.0] 3.6	55.8 [16.4] 42.3 [12.4] 3.7	53.4 [15.7] 38.0 [11.1] 3.6	53.1 [15.6] 37.4 [11.0] 3.6	52.5 [15.4] 48.8 [14.3] 3.6	50.3 [14.7] 43.8 [12.8] 3.5	50.0 [14.7] 43.1 [12.6] 3.5
	85 [29.4]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	57.0 [16.7] 33.7 [9.9] 3.9	54.6 [16.0] 30.2 [8.9] 3.8	54.2 [15.9] 29.7 [8.7] 3.8	53.8 [15.8] 41.3 [12.1] 3.8	51.5 [15.1] 37.0 [10.8] 3.8	51.1 [15.0] 36.4 [10.7] 3.8	50.5 [14.8] 47.8 [14.0] 3.8	48.3 [14.2] 42.9 [12.6] 3.7	48.0 [14.1] 42.1 [12.3] 3.7
	90 [32.2]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	55.0 [16.1] 32.7 [9.6] 4.1	52.6 [15.4] 29.3 [8.6] 4.0	52.3 [15.3] 28.9 [8.5] 4.0	51.7 [15.2] 40.3 [11.8] 4.0	49.5 [14.5] 36.1 [10.6] 3.9	49.2 [14.4] 35.5 [10.4] 3.9	48.5 [14.2] 46.8 [13.7] 4.0	46.4 [13.6] 41.9 [12.3] 3.9	46.1 [13.5] 41.3 [12.1] 3.9
	95 [35]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	52.9 [15.5] 31.7 [9.3] 4.3	50.7 [14.9] 28.5 [8.4] 4.2	50.4 [14.8] 28.0 [8.2] 4.1	49.7 [14.6] 39.3 [11.5] 4.2	47.6 [14.0] 35.3 [10.3] 4.1	47.3 [13.9] 34.7 [10.2] 4.1	46.4 [13.6] 45.8 [13.4] 4.1	44.4 [13.0] 41.1 [12.0] 4.0	44.2 [13.0] 40.4 [11.8] 4.0
	100 [37.8]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	50.9 [14.9] 30.9 [9.1] 4.4	48.7 [14.3] 27.7 [8.1] 4.3	48.4 [14.2] 27.2 [8.0] 4.3	47.6 [14.0] 38.4 [11.3] 4.4	45.6 [13.4] 34.5 [10.1] 4.3	45.3 [13.3] 33.9 [9.9] 4.3	44.4 [13.0] 44.4 [13.0] 4.3	42.5 [12.5] 40.3 [11.8] 4.2	42.2 [12.4] 39.6 [11.6] 4.2
	105 [40.6]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	48.9 [14.3] 30.0 [8.8] 4.6	46.8 [13.7] 26.9 [7.9] 4.5	46.5 [13.6] 26.5 [7.8] 4.5	45.6 [13.4] 37.6 [11.0] 4.5	43.7 [12.8] 33.7 [9.9] 4.4	43.4 [12.7] 33.2 [9.7] 4.4	42.3 [12.4] 42.3 [12.4] 4.5	40.5 [11.9] 39.5 [11.6] 4.4	40.3 [11.8] 38.9 [11.4] 4.4
	110 [43.3]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	46.8 [13.7] 29.2 [8.6] 4.8	44.8 [13.1] 26.2 [7.7] 4.7	44.5 [13.0] 25.8 [7.6] 4.6	43.6 [12.8] 36.8 [10.8] 4.7	41.7 [12.2] 33.0 [9.7] 4.6	41.4 [12.1] 32.5 [9.5] 4.6	40.3 [11.8] 40.3 [11.8] 4.6	38.6 [11.3] 38.6 [11.3] 4.5	38.3 [11.2] 38.2 [11.2] 4.5
	115 [46.1]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	44.8 [13.1] 28.5 [8.4] 4.9	42.9 [12.6] 25.6 [7.5] 4.8	42.6 [12.5] 25.2 [7.4] 4.8	41.5 [12.2] 36.1 [10.6] 4.9	39.8 [11.7] 32.4 [9.5] 4.8	39.5 [11.6] 31.8 [9.3] 4.8	38.3 [11.2] 38.3 [11.2] 4.8	36.6 [10.7] 36.6 [10.7] 4.7	36.4 [10.7] 36.4 [10.7] 4.7
	120 [48.9]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	42.8 [12.5] 27.8 [8.1] 5.1	40.9 [12.0] 25.0 [7.3] 5.0	40.7 [11.9] 24.6 [7.2] 5.0	39.5 [11.6] 35.4 [10.4] 5.0	37.8 [11.1] 31.8 [9.3] 4.9	37.6 [11.0] 31.3 [9.2] 4.9	36.2 [10.6] 36.2 [10.6] 5.0	34.7 [10.2] 34.7 [10.2] 4.9	34.5 [10.1] 34.5 [10.1] 4.9
125 [51.7]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	40.7 [11.9] 27.2 [8.0] 5.3	39.0 [11.4] 24.4 [7.2] 5.2	38.7 [11.3] 24.0 [7.0] 5.1	37.5 [11.0] 34.8 [10.2] 5.2	35.9 [10.5] 31.2 [9.1] 5.1	35.6 [10.4] 30.7 [9.0] 5.1	34.2 [10.0] 34.2 [10.0] 5.1	32.7 [9.6] 32.7 [9.6] 5.0	32.5 [9.5] 32.5 [9.5] 5.0	

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 Btu/h
Sens —Sensible capacity x 1000 Btu/h
Power —kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

GROSS SYSTEMS COOLING PERFORMANCE DATA—RHPBYC060

RHPBYC060 - ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			2175 [1026]	1875 [885]	1700 [802]	2175 [1026]	1875 [885]	1700 [802]	2175 [1026]	1875 [885]	1700 [802]
DR ①			.05	.09	.12	.05	.09	.12	.05	.09	.12
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total kBtu/h [kW]	68.1 [20.0]	66.2 [19.4]	65.0 [19.1]	65.1 [19.1]	63.3 [18.6]	62.2 [18.2]	62.1 [18.2]	60.3 [17.7]	59.3 [17.4]
		Sens kBtu/h [kW]	40.1 [11.8]	37.4 [11.0]	35.7 [10.5]	50.0 [14.7]	46.5 [13.6]	44.5 [13.0]	56.9 [16.7]	52.9 [15.5]	50.6 [14.8]
		Power	4.5	4.4	4.4	4.4	4.4	4.3	4.4	4.3	4.3
	80 [26.7]	Total kBtu/h [kW]	66.8 [19.6]	64.9 [19.0]	63.8 [18.7]	63.8 [18.7]	62.0 [18.2]	60.9 [17.8]	60.8 [17.8]	59.1 [17.3]	58.1 [17.0]
		Sens kBtu/h [kW]	39.7 [11.6]	37.0 [10.8]	35.4 [10.4]	49.6 [14.5]	46.2 [13.5]	44.1 [12.9]	56.5 [16.6]	52.5 [15.4]	50.2 [14.7]
		Power	4.7	4.6	4.6	4.6	4.6	4.5	4.6	4.5	4.5
	85 [29.4]	Total kBtu/h [kW]	65.5 [19.2]	63.7 [18.7]	62.6 [18.3]	62.5 [18.3]	60.7 [17.8]	59.7 [17.5]	59.5 [17.4]	57.8 [16.9]	56.9 [16.7]
		Sens kBtu/h [kW]	39.4 [11.5]	36.6 [10.7]	35.0 [10.3]	49.2 [14.4]	45.8 [13.4]	43.8 [12.8]	56.1 [16.4]	52.2 [15.3]	49.9 [14.6]
		Power	4.9	4.8	4.8	4.9	4.8	4.8	4.8	4.7	4.7
	90 [32.2]	Total kBtu/h [kW]	64.2 [18.8]	62.4 [18.3]	61.3 [18.0]	61.2 [17.9]	59.5 [17.4]	58.5 [17.1]	58.2 [17.1]	56.6 [16.6]	55.6 [16.3]
Sens kBtu/h [kW]		39.0 [11.4]	36.3 [10.6]	34.7 [10.2]	48.9 [14.3]	45.5 [13.3]	43.5 [12.7]	55.7 [16.3]	51.9 [15.2]	49.6 [14.5]	
Power		5.1	5.0	5.0	5.1	5.0	5.0	5.0	4.9	4.9	
95 [35]	Total kBtu/h [kW]	62.9 [18.4]	61.2 [17.9]	60.1 [17.6]	59.9 [17.6]	58.2 [17.1]	57.3 [16.8]	56.9 [16.7]	55.3 [16.2]	54.4 [15.9]	
	Sens kBtu/h [kW]	38.7 [11.3]	36.0 [10.6]	34.4 [10.1]	48.6 [14.2]	45.2 [13.2]	43.2 [12.7]	55.4 [16.2]	51.6 [15.1]	49.3 [14.4]	
	Power	5.3	5.3	5.2	5.3	5.2	5.2	5.2	5.2	5.1	
100 [37.8]	Total kBtu/h [kW]	61.6 [18.1]	59.9 [17.6]	58.9 [17.3]	58.7 [17.2]	57.0 [16.7]	56.0 [16.4]	55.7 [16.3]	54.1 [15.9]	53.2 [15.6]	
	Sens kBtu/h [kW]	38.4 [11.3]	35.7 [10.5]	34.2 [10.0]	48.3 [14.2]	44.9 [13.2]	43.0 [12.6]	55.1 [16.1]	51.3 [15.0]	49.1 [14.4]	
	Power	5.6	5.5	5.4	5.5	5.4	5.4	5.5	5.4	5.3	
105 [40.6]	Total kBtu/h [kW]	60.4 [17.7]	58.7 [17.2]	57.7 [16.9]	57.4 [16.8]	55.7 [16.3]	54.8 [16.1]	54.4 [15.9]	52.8 [15.5]	51.9 [15.2]	
	Sens kBtu/h [kW]	38.2 [11.2]	35.5 [10.4]	34.0 [10.0]	48.0 [14.1]	44.7 [13.1]	42.8 [12.5]	54.4 [15.9]	51.1 [15.0]	48.9 [14.3]	
	Power	5.8	5.7	5.6	5.7	5.7	5.6	5.7	5.6	5.6	
110 [43.3]	Total kBtu/h [kW]	59.1 [17.3]	57.4 [16.8]	56.4 [16.5]	56.1 [16.4]	54.5 [16.0]	53.6 [15.7]	53.1 [15.6]	51.6 [15.1]	50.7 [14.9]	
	Sens kBtu/h [kW]	38.0 [11.1]	35.3 [10.3]	33.8 [9.9]	47.8 [14.0]	44.5 [13.0]	42.6 [12.5]	53.1 [15.6]	50.9 [14.9]	48.7 [14.3]	
	Power	6.0	5.9	5.9	6.0	5.9	5.8	5.9	5.8	5.8	
115 [46.1]	Total kBtu/h [kW]	57.8 [16.9]	56.2 [16.5]	55.2 [16.2]	54.8 [16.1]	53.2 [15.6]	52.3 [15.3]	51.8 [15.2]	50.3 [14.7]	49.5 [14.5]	
	Sens kBtu/h [kW]	37.8 [11.1]	35.2 [10.3]	33.6 [9.8]	47.7 [14.0]	44.3 [13.0]	42.4 [12.4]	51.8 [15.2]	50.3 [14.7]	48.5 [14.2]	
	Power	6.2	6.1	6.1	6.2	6.1	6.0	6.1	6.0	6.0	
120 [48.9]	Total kBtu/h [kW]	56.5 [16.6]	54.9 [16.1]	54.0 [15.8]	53.5 [15.7]	52.0 [15.2]	51.1 [15.0]	50.5 [14.8]	49.1 [14.4]	48.3 [14.2]	
	Sens kBtu/h [kW]	37.6 [11.0]	35.0 [10.3]	33.5 [9.8]	47.5 [13.9]	44.2 [13.0]	42.3 [12.4]	50.5 [14.8]	49.1 [14.4]	48.3 [14.2]	
	Power	6.4	6.3	6.3	6.4	6.3	6.3	6.3	6.2	6.2	
125 [51.7]	Total kBtu/h [kW]	55.2 [16.2]	53.7 [15.7]	52.7 [15.4]	52.2 [15.3]	50.7 [14.9]	49.9 [14.6]	49.2 [14.4]	47.8 [14.0]	47.0 [13.8]	
	Sens kBtu/h [kW]	37.5 [11.0]	34.9 [10.2]	33.4 [9.8]	47.4 [13.9]	44.1 [12.9]	42.2 [12.4]	49.2 [14.4]	47.8 [14.0]	47.0 [13.8]	
	Power	6.6	6.6	6.5	6.6	6.5	6.5	6.6	6.5	6.4	

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 Btu/h
Sens —Sensible capacity x 1000 Btu/h
Power —kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

HEATING PERFORMANCE DATA—RHPBYC024

IDB		60°F [15.5°C]			70°F [21.1°C]			80°F [26.7°C]		
CFM [L/s]		825 [389]	800 [378]	650 [307]	825 [389]	800 [378]	650 [307]	825 [389]	800 [378]	650 [307]
OUTDOOR DRY BULB TEMPERATURE °F [°C]	0 [-17.8]	Total kBtu/h [kW] Power	8.2 [2.4] 1.4	8.1 [2.4] 1.4	8.0 [2.3] 1.4	7.4 [2.2] 1.6	7.4 [2.2] 1.6	7.3 [2.1] 1.6	6.6 [1.9] 1.8	6.5 [1.9] 1.8
	5 [-15]	Total kBtu/h [kW] Power	9.8 [2.9] 1.4	9.7 [2.8] 1.4	9.6 [2.8] 1.4	9.0 [2.6] 1.6	8.9 [2.6] 1.6	8.8 [2.6] 1.6	8.2 [2.4] 1.8	8.0 [2.3] 1.9
	10 [-12.2]	Total kBtu/h [kW] Power	11.3 [3.3] 1.4	11.3 [3.3] 1.4	11.2 [3.3] 1.4	10.6 [3.1] 1.6	10.5 [3.1] 1.6	10.4 [3.0] 1.6	9.8 [2.9] 1.8	9.6 [2.8] 1.9
	15 [-9.4]	Total kBtu/h [kW] Power	12.9 [3.8] 1.4	12.9 [3.8] 1.4	12.7 [3.7] 1.4	12.1 [3.5] 1.6	12.1 [3.5] 1.6	12.0 [3.5] 1.7	11.4 [3.3] 1.8	11.2 [3.3] 1.9
	20 [-6.7]	Total kBtu/h [kW] Power	14.5 [4.2] 1.4	14.5 [4.2] 1.4	14.3 [4.2] 1.5	13.7 [4.0] 1.7	13.7 [4.0] 1.7	13.5 [4.0] 1.7	12.9 [3.8] 1.9	12.7 [3.7] 1.9
	25 [-3.9]	Total kBtu/h [kW] Power	16.1 [4.7] 1.5	16.1 [4.7] 1.5	15.9 [4.7] 1.5	15.3 [4.5] 1.7	15.3 [4.5] 1.7	15.1 [4.4] 1.7	14.5 [4.2] 1.9	14.3 [4.2] 2.0
	30 [-1.1]	Total kBtu/h [kW] Power	17.7 [5.2] 1.5	17.7 [5.2] 1.5	17.4 [5.1] 1.6	16.9 [5.0] 1.7	16.9 [5.0] 1.7	16.7 [4.9] 1.8	16.1 [4.7] 2.0	15.9 [4.7] 2.0
	35 [1.7]	Total kBtu/h [kW] Power	19.3 [5.7] 1.6	19.2 [5.6] 1.6	19.0 [5.6] 1.6	18.5 [5.4] 1.8	18.5 [5.4] 1.8	18.2 [5.3] 1.8	17.7 [5.2] 2.0	17.4 [5.1] 2.1
	40 [4.4]	Total kBtu/h [kW] Power	20.9 [6.1] 1.6	20.8 [6.1] 1.6	20.6 [6] 1.7	20.1 [5.9] 1.9	20.0 [5.9] 1.9	19.8 [5.8] 1.9	19.3 [5.7] 2.1	19.0 [5.6] 2.1
	45 [7.2]	Total kBtu/h [kW] Power	22.5 [6.6] 1.7	22.4 [6.6] 1.7	22.1 [6.5] 1.7	21.7 [6.4] 1.9	21.6 [6.3] 1.9	21.3 [6.2] 2.0	20.9 [6.1] 2.1	20.6 [6.0] 2.2
	50 [10]	Total kBtu/h [kW] Power	24.1 [7.1] 1.8	24.0 [7.0] 1.8	23.7 [6.9] 1.8	23.3 [6.8] 2.0	23.2 [6.8] 2.0	22.9 [6.7] 2.1	22.5 [6.6] 2.2	22.1 [6.5] 2.3

IDB —Indoor air dry bulb

HEATING PERFORMANCE DATA—RHPBYC036

IDB		60°F [15.5°C]			70°F [21.1°C]			80°F [26.7°C]		
CFM [L/s]		1300 [614]	1300 [614]	1000 [472]	1300 [614]	1300 [614]	1000 [472]	1300 [614]	1300 [614]	1000 [472]
OUTDOOR DRY BULB TEMPERATURE °F [°C]	0 [-17.8]	Total kBtu/h [kW] Power	11.7 [3.4] 2.0	11.7 [3.4] 2.0	11.5 [3.4] 2.0	10.8 [3.2] 2.2	10.8 [3.2] 2.2	10.6 [3.1] 2.3	9.8 [2.9] 2.5	9.6 [2.8] 2.6
	5 [-15]	Total kBtu/h [kW] Power	14.3 [4.2] 2.0	14.3 [4.2] 2.0	14.0 [4.1] 2.1	13.3 [3.9] 2.3	13.3 [3.9] 2.3	13.1 [3.8] 2.3	12.3 [3.6] 2.6	12.1 [3.5] 2.6
	10 [-12.2]	Total kBtu/h [kW] Power	16.8 [4.9] 2.1	16.8 [4.9] 2.1	16.5 [4.8] 2.1	15.8 [4.6] 2.3	15.8 [4.6] 2.3	15.5 [4.5] 2.4	14.8 [4.3] 2.6	14.6 [4.3] 2.7
	15 [-9.4]	Total kBtu/h [kW] Power	19.3 [5.7] 2.1	19.3 [5.7] 2.1	19.0 [5.6] 2.2	18.3 [5.4] 2.4	18.3 [5.4] 2.4	18.0 [5.3] 2.5	17.3 [5.1] 2.7	17.1 [5.0] 2.8
	20 [-6.7]	Total kBtu/h [kW] Power	21.8 [6.4] 2.2	21.8 [6.4] 2.2	21.5 [6.3] 2.3	20.8 [6.1] 2.5	20.8 [6.1] 2.5	20.5 [6.0] 2.5	19.9 [5.8] 2.8	19.5 [5.7] 2.8
	25 [-3.9]	Total kBtu/h [kW] Power	24.3 [7.1] 2.3	24.3 [7.1] 2.3	23.9 [7.0] 2.3	23.4 [6.9] 2.5	23.4 [6.9] 2.5	23.0 [6.7] 2.6	22.4 [6.6] 2.8	22.0 [6.4] 2.9
	30 [-1.1]	Total kBtu/h [kW] Power	26.9 [7.9] 2.3	26.9 [7.9] 2.3	26.4 [7.7] 2.4	25.9 [7.6] 2.6	25.9 [7.6] 2.6	25.5 [7.5] 2.6	24.9 [7.3] 2.9	24.5 [7.2] 3.0
	35 [1.7]	Total kBtu/h [kW] Power	29.4 [8.6] 2.4	29.4 [8.6] 2.4	28.9 [8.5] 2.4	28.4 [8.3] 2.6	28.4 [8.3] 2.6	27.9 [8.2] 2.7	27.4 [8.0] 2.9	27.0 [7.9] 3.0
	40 [4.4]	Total kBtu/h [kW] Power	31.9 [9.3] 2.4	31.9 [9.3] 2.4	31.4 [9.2] 2.5	30.9 [9.1] 2.7	30.9 [9.1] 2.7	30.4 [8.9] 2.8	29.9 [8.8] 3.0	29.5 [8.6] 3.1
	45 [7.2]	Total kBtu/h [kW] Power	34.4 [10.1] 2.5	34.4 [10.1] 2.5	33.9 [9.9] 2.6	33.4 [9.8] 2.8	33.4 [9.8] 2.8	32.9 [9.6] 2.8	32.5 [9.5] 3.1	31.9 [9.3] 3.1
	50 [10]	Total kBtu/h [kW] Power	36.9 [10.8] 2.6	36.9 [10.8] 2.6	36.3 [10.6] 2.6	36.0 [10.6] 2.8	36.0 [10.6] 2.8	35.4 [10.4] 2.9	35.0 [10.3] 3.1	34.4 [10.1] 3.2

IDB —Indoor air dry bulb

[] Designates Metric Conversions

HEATING PERFORMANCE DATA—RHPBYC048

IDB			60°F [15.5°C]			70°F [21.1°C]			80°F [26.7°C]		
CFM [L/s]			1700 [802]	1600 [755]	1325 [625]	1700 [802]	1600 [755]	1325 [625]	1700 [802]	1600 [755]	1325 [625]
OUTDOOR DRY BULB TEMPERATURE °F [°C]	0 [-17.8]	Total kBtu/h [kW] Power	17.1 [5.0] 2.6	16.9 [5.0] 2.7	16.8 [4.9] 2.7	15.6 [4.6] 2.9	15.4 [4.5] 3.0	15.3 [4.5] 3.0	14.0 [4.1] 3.3	13.8 [4.0] 3.4	13.8 [4.0] 3.4
	5 [-15]	Total kBtu/h [kW] Power	20.4 [6.0] 2.7	20.1 [5.9] 2.8	20.0 [5.9] 2.8	18.8 [5.5] 3.0	18.6 [5.5] 3.1	18.5 [5.4] 3.1	17.3 [5.1] 3.4	17.1 [5.0] 3.5	17.0 [5.0] 3.5
	10 [-12.2]	Total kBtu/h [kW] Power	23.6 [6.9] 2.8	23.3 [6.8] 2.9	23.2 [6.8] 2.9	22.1 [6.5] 3.1	21.8 [6.4] 3.2	21.7 [6.4] 3.2	20.6 [6.0] 3.5	20.3 [5.9] 3.6	20.2 [5.9] 3.6
	15 [-9.4]	Total kBtu/h [kW] Power	26.9 [7.9] 2.9	26.5 [7.8] 3.0	26.4 [7.7] 3.0	25.4 [7.4] 3.2	25.0 [7.3] 3.3	24.9 [7.3] 3.3	23.8 [7.0] 3.6	23.5 [6.9] 3.7	23.4 [6.9] 3.8
	20 [-6.7]	Total kBtu/h [kW] Power	30.2 [8.9] 3.0	29.7 [8.7] 3.1	29.6 [8.7] 3.1	28.6 [8.4] 3.3	28.2 [8.3] 3.4	28.1 [8.2] 3.4	27.1 [7.9] 3.7	26.7 [7.8] 3.8	26.6 [7.8] 3.9
	25 [-3.9]	Total kBtu/h [kW] Power	33.4 [9.8] 3.1	33.0 [9.7] 3.2	32.8 [9.6] 3.2	31.9 [9.3] 3.4	31.5 [9.2] 3.5	31.3 [9.2] 3.5	30.4 [8.9] 3.8	30.0 [8.8] 3.9	29.8 [8.7] 4.0
	30 [-1.1]	Total kBtu/h [kW] Power	36.7 [10.8] 3.2	36.2 [10.6] 3.3	36.0 [10.6] 3.3	35.2 [10.3] 3.5	34.7 [10.2] 3.6	34.5 [10.1] 3.6	33.6 [9.8] 3.9	33.2 [9.7] 4.0	33.0 [9.7] 4.1
	35 [1.7]	Total kBtu/h [kW] Power	40.0 [11.7] 3.3	39.4 [11.5] 3.4	39.2 [11.5] 3.5	38.4 [11.3] 3.6	37.9 [11.1] 3.7	37.7 [11.0] 3.7	36.9 [10.8] 4	36.4 [10.7] 4.1	36.2 [10.6] 4.2
	40 [4.4]	Total kBtu/h [kW] Power	43.2 [12.7] 3.4	42.6 [12.5] 3.5	42.4 [12.4] 3.6	41.7 [12.2] 3.7	41.1 [12.0] 3.8	40.9 [12.0] 3.8	40.2 [11.8] 4.1	39.6 [11.6] 4.2	39.4 [11.5] 4.3
	45 [7.2]	Total kBtu/h [kW] Power	46.5 [13.6] 3.5	45.9 [13.5] 3.6	45.6 [13.4] 3.7	45.0 [13.2] 3.8	44.3 [13.0] 3.9	44.1 [12.9] 3.9	43.4 [12.7] 4.2	42.8 [12.5] 4.3	42.6 [12.5] 4.4
	50 [10]	Total kBtu/h [kW] Power	49.7 [14.6] 3.6	49.1 [14.4] 3.7	48.8 [14.3] 3.8	48.2 [14.1] 3.9	47.6 [14.0] 4.0	47.3 [13.9] 4.0	46.7 [13.7] 4.3	46.1 [13.5] 4.4	45.8 [13.4] 4.5

IDB —Indoor air dry bulb

HEATING PERFORMANCE DATA—RHPBYC060

IDB			60°F [15.5°C]			70°F [21.1°C]			80°F [26.7°C]		
CFM [L/s]			2175 [1026]	1875 [885]	1675 [791]	2175 [1026]	1875 [885]	1675 [791]	2175 [1026]	1875 [885]	1675 [791]
OUTDOOR DRY BULB TEMPERATURE °F [°C]	0 [-17.8]	Total kBtu/h [kW] Power	23.6 [6.9] 3.4	23.3 [6.8] 3.5	23.1 [6.8] 3.5	21.9 [6.4] 3.8	21.7 [6.4] 3.9	21.5 [6.3] 3.9	20.3 [5.9] 4.3	20.0 [5.9] 4.3	19.9 [5.8] 4.4
	5 [-15]	Total kBtu/h [kW] Power	27.5 [8.1] 3.5	27.2 [8.0] 3.6	27.0 [7.9] 3.6	25.8 [7.6] 3.9	25.5 [7.5] 4.0	25.3 [7.4] 4.0	24.1 [7.1] 4.3	23.9 [7.0] 4.4	23.7 [6.9] 4.5
	10 [-12.2]	Total kBtu/h [kW] Power	31.3 [9.2] 3.6	31.0 [9.1] 3.7	30.8 [9.0] 3.7	29.7 [8.7] 4.0	29.3 [8.6] 4.1	29.1 [8.5] 4.1	28.0 [8.2] 4.4	27.7 [8.1] 4.5	27.5 [8.1] 4.6
	15 [-9.4]	Total kBtu/h [kW] Power	35.2 [10.3] 3.7	34.8 [10.2] 3.8	34.6 [10.1] 3.8	33.6 [9.8] 4.1	33.2 [9.7] 4.2	32.9 [9.6] 4.2	31.9 [9.3] 4.5	31.5 [9.2] 4.6	31.3 [9.2] 4.7
	20 [-6.7]	Total kBtu/h [kW] Power	39.1 [11.5] 3.8	38.7 [11.3] 3.9	38.4 [11.3] 3.9	37.4 [11.0] 4.2	37.0 [10.8] 4.3	36.7 [10.8] 4.3	35.8 [10.5] 4.6	35.4 [10.4] 4.7	35.1 [10.3] 4.8
	25 [-3.9]	Total kBtu/h [kW] Power	43.0 [12.6] 3.9	42.5 [12.5] 3.9	42.2 [12.4] 4.0	41.3 [12.1] 4.3	40.9 [12.0] 4.4	40.5 [11.9] 4.4	39.7 [11.6] 4.7	39.2 [11.5] 4.8	38.9 [11.4] 4.9
	30 [-1.1]	Total kBtu/h [kW] Power	46.9 [13.7] 4.0	46.3 [13.6] 4.0	46.0 [13.5] 4.1	45.2 [13.2] 4.4	44.7 [13.1] 4.4	44.4 [13.0] 4.5	43.5 [12.7] 4.8	43.0 [12.6] 4.9	42.7 [12.5] 5.0
	35 [1.7]	Total kBtu/h [kW] Power	50.8 [14.9] 4.0	50.2 [14.7] 4.1	49.8 [14.6] 4.2	49.1 [14.4] 4.4	48.5 [14.2] 4.5	48.2 [14.1] 4.6	47.4 [13.9] 4.9	46.9 [13.7] 5.0	46.5 [13.6] 5.1
	40 [4.4]	Total kBtu/h [kW] Power	54.6 [16.0] 4.1	54.0 [15.8] 4.2	53.6 [15.7] 4.3	53.0 [15.5] 4.5	52.4 [15.4] 4.6	52.0 [15.2] 4.7	51.3 [15.0] 5.0	50.7 [14.9] 5.1	50.3 [14.7] 5.1
	45 [7.2]	Total kBtu/h [kW] Power	58.5 [17.1] 4.2	57.9 [17.0] 4.3	57.4 [16.8] 4.4	56.8 [16.6] 4.6	56.2 [16.5] 4.7	55.8 [16.4] 4.8	55.2 [16.2] 5.1	54.6 [16.0] 5.2	54.1 [15.9] 5.2
	50 [10]	Total kBtu/h [kW] Power	62.4 [18.3] 4.3	61.7 [18.1] 4.4	61.2 [17.9] 4.5	60.7 [17.8] 4.7	60.0 [17.6] 4.8	59.6 [17.5] 4.9	59.1 [17.3] 5.2	58.4 [17.1] 5.3	57.9 [17.0] 5.3

IDB —Indoor air dry bulb

[] Designates Metric Conversions

INDOOR AIRFLOW PERFORMANCE — RHPBYC — 208/230V

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory			Manufacturer Recommended Cooling Airflow (Min/Max) [Tap 3 Only]	Blower Size, Motor HP [W] & # of Speeds	Motor Speed/Tap	External Static Pressure - Inches W.C. [kPa] (Side Discharge-Dry Coil)										
	Hi-Cool	Low-Cool	Heat				0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.20]	0.9 [.22]	1.0 [.25]	
2.0 [7.03]	Tap 3	Tap 2	Tap 1	700 CFM/ 900 CFM	12x9 Blower 1/2 HP [372] 3 Speed (Constant Torque)	Tap 1 - Electric Heat/ Fan-Only	CFM	782	711	585	475	376	278	247	185	—	—
						RPM	375	437	540	627	670	703	744	781	—	—	
						Watts	46	52	63	72	76	78	82	86	—	—	
						CFM	709	627	472	356	277	225	171	—	—		
						RPM	349	426	551	611	641	694	720	—	—		
						Watts	37	43	54	60	63	67	69	—	—		
3.0 [10.55]	Tap 3	Tap 2	Tap 1	1050 CFM/ 1350 CFM	12x9 Blower 3/4 HP [559] 3 Speed (Constant Torque)	CFM	1092	1024	963	902	816	728	649	546	496	405	
						RPM	428	489	547	603	673	733	782	859	879	912	
						Watts	88	98	108	117	129	140	148	162	165	171	
						CFM	1254	1194	1139	1081	1021	946	867	799	705	649	
						RPM	461	512	563	616	672	734	791	852	918	948	
						Watts	115	127	137	149	162	174	187	199	213	220	
4.0 [14.07]	Tap 3	Tap 2	Tap 1	1050 CFM/ 1350 CFM	12x9 Blower 3/4 HP [559] 3 Speed (Constant Torque)	CFM	1010	937	868	786	684	584	512	406	355	316	
						RPM	404	469	532	600	672	752	792	829	848	897	
						Watts	71	80	89	99	110	122	127	133	136	143	
						CFM	1563	1512	1463	1422	1373	1327	1284	1239	1175	1119	
						RPM	537	580	624	664	708	751	794	835	886	931	
						Watts	202	215	229	242	256	270	283	296	312	327	
5.0 [17.59]	Tap 3	Tap 2	Tap 1	1400 CFM/ 1800 CFM	12x9 Blower 3/4 HP [559] 3 Speed (Constant Torque)	CFM	1789	1752	1703	1662	1623	1573	1534	1488	1446	1399	
						RPM	594	630	672	708	746	791	827	869	908	948	
						Watts	290	305	322	336	352	369	383	401	417	434	
						CFM	1182	1117	1057	991	916	842	735	675	581	524	
						RPM	450	508	562	620	682	737	801	838	905	923	
						Watts	102	113	124	135	147	158	170	177	190	193	
5.0 [17.59]	Tap 3	Tap 2	Tap 1	1750 CFM/ 2250 CFM	12x9 Blower 1 HP [746] 3 Speed (Constant Torque)	CFM	1685	1639	1595	1550	1509	1462	1419	1371	1326	1270	
						RPM	573	613	653	694	733	778	819	860	899	945	
						Watts	249	264	278	294	308	324	339	354	369	385	
						CFM	1531	1481	1430	1382	1333	1285	1230	1172	1123	1054	
						RPM	535	579	625	672	717	765	811	857	899	950	
						Watts	190	203	217	231	246	261	275	289	303	319	
5.0 [17.59]	Tap 3	Tap 2	Tap 1	1750 CFM/ 2250 CFM	12x9 Blower 1 HP [746] 3 Speed (Constant Torque)	CFM	1400	1343	1287	1235	1181	1117	1065	993	914	844	
						RPM	497	550	601	648	702	758	801	853	908	949	
						Watts	150	165	177	189	204	218	229	244	258	269	
						CFM	2146	2112	2079	2048	2010	1969	1931	1903	1865	1831	
						RPM	697	727	755	789	817	859	894	923	963	997	
						Watts	476	494	510	529	546	570	591	608	632	653	

NOTES: (1) * Use motor tap 3 to achieve rated airflow at AHRI minimum external static pressure.

DOWN DISCHARGE PRESSURE DROP (ADD TO EXTERNAL STATIC PRESSURE)					
CFM [L/s]	800 [378]	1000 [472]	1200 [566]	1400 [661]	1600 [755]
Pressure Drop—Includes W.C. [kPa]	.02 [.005]	.05 [.012]	.07 [.017]	.1 [.025]	.12 [.030]
				.15 [.037]	.17 [.042]

[] Designates Metric Conversions


ELECTRICAL DATA - RHPBYC SERIES					
		024AJT	036AJT	048AJT	060AJT
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253
	Volts	208/230	208/230	208/230	208/230
	Phase	1	1	1	1
	Hz	60	60	60	60
	Minimum Circuit Ampacity	23	29	37	45
	Minimum Overcurrent Protection	30	35	45	60
	Maximum Overcurrent Protection	30	40	50	60
Compressor Motor	No.	1	1	1	1
	Volts	208/230	208/230	208/230	208/230
	Phase	1	1	1	1
	Amps (RLA), Comp. 1	11.9	14.9	20.1	25.2
	Amps (LRA), Comp. 1	65	90	141	147.3
	Amps (RLA), Comp. 2	N/A	N/A	N/A	N/A
	Amps (LRA), Comp. 2	N/A	N/A	N/A	N/A
Condenser Motor	No.	1	1	1	1
	Volts	208-230	208-230	208-230	208-230
	Phase	1	1	1	1
	HP	1/3	1/3	1/2	1/2
	Amps (FLA, each)	3.6	3.6	5.3	5.3
	Amps (LRA, each)	0	0	0	0
Evaporator Fan	No.	1	1	1	1
	Volts	208/230	208/230	208/230	208/230
	Phase	1	1	1	1
	HP	1/2	3/4	3/4	1
	Amps (FLA, each)	4.1	6	6	7.6
	Amps (LRA, each)	0	0	0	0

208/230 VOLT, SINGLE PHASE, 60 Hz, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION													
Single Power Supply for Both Unit and Heater Kit							Separate Power Supply for Both Unit and Heater Kit						
Model Number	Heater Kit			Air Conditioner			Heater Kit			Air Conditioner			
	RXQJ-Heater Kit Nominal kW	Rated Heater kW @ Rated Voltage	Heater MBH @ Rated Voltage	Heater Amp. @ Rated Voltage	Unit Min. Ckt. Ampacity @ Rated Voltage	Overcurrent Protective Device		Min. Ckt. Ampacity @ Rated Voltage	Max. Fuse Size @ Rated Voltage	Min. Circuit Ampacity @ Rated Voltage	Overcurrent Protective Device		
						Min./Max. @ Min Voltage	Min./Max. @ Max Voltage				Min./Max. @ Min Voltage	Min./Max. @ Max Voltage	
RHPBYC024AJT	NONE*	—/—	—/—	—/—	23/23	30/30	30/30	—/—	—/—	23/23	30/30	30/30	
	C05J	3.6/4.8	12.28/16.38	17.3/20.0	27/31	30/30	35/35	22/25	25/25	23/23	30/30	30/30	
	C07J	5.4/7.2	18.42/24.56	26.0/30.0	38/43	40/40	45/45	33/38	35/40	23/23	30/30	30/30	
	C10J	7.2/9.6	24.56/32.75	34.6/40.0	49/56	50/50	60/60	44/50	45/50	23/23	30/30	30/30	
RHPBYC036AJT	NONE*	—/—	—/—	—/—	29/29	35/40	35/40	—/—	—/—	29/29	35/40	35/40	
	C05J	3.6/4.8	12.28/16.38	17.3/20.0	30/33	35/40	35/40	22/25	25/25	29/29	35/40	35/40	
	C07J	5.4/7.2	18.42/24.56	26.0/30.0	40/45	40/40	45/45	33/38	35/40	29/29	35/40	35/40	
	C10J	7.2/9.6	24.56/32.75	34.6/40.0	51/58	60/60	60/60	44/50	45/50	29/29	35/40	35/40	
	C15J	10.8/14.4	36.84/49.13	51.9/60.0	73/83	80/80	90/90	65/75	70/80	29/29	35/40	35/40	
RHPBYC048AJT	NONE*	—/—	—/—	—/—	37/37	45/50	45/50	—/—	—/—	37/37	45/50	45/50	
	C05J	3.6/4.8	12.28/16.38	17.3/20.0	37/37	45/50	45/50	22/25	25/25	37/37	45/50	45/50	
	C07J	5.4/7.2	18.42/24.56	26.0/30.0	40/45	45/50	45/50	33/38	35/40	37/37	45/50	45/50	
	C10J	7.2/9.6	24.56/32.75	34.6/40.0	51/58	60/60	60/60	44/50	45/50	37/37	45/50	45/50	
	C15J	10.8/14.4	36.84/49.13	51.9/60.0	73/83	80/80	90/90	65/75	70/80	37/37	45/50	45/50	
	C20J	14.4/19.2	49.13/65.50	69.3/80.0	95/108	100/100	110/110	87/100	90/100	37/37	45/50	45/50	
RHPBYC060AJT	NONE*	—/—	—/—	—/—	45/45	60/60	60/60	—/—	—/—	45/45	60/60	60/60	
	C05J	3.6/4.8	12.28/16.38	17.3/20.0	45/45	60/60	60/60	22/25	25/25	45/45	60/60	60/60	
	C07J	5.4/7.2	18.42/24.56	26.0/30.0	45/47	60/60	60/60	33/38	35/40	45/45	60/60	60/60	
	C10J	7.2/9.6	24.56/32.75	34.6/40.0	53/60	60/60	60/60	44/50	45/50	45/45	60/60	60/60	
	C15J	10.8/14.4	36.84/49.13	51.9/60.0	75/85	80/80	90/90	65/75	70/80	45/45	60/60	60/60	
	C20J	14.4/19.2	49.13/65.50	69.3/80.0	97/110	100/100	110/110	87/100	90/100	45/45	60/60	60/60	


DIMENSIONS

Model	Height "A"
24, 36, 48, 60	37 1/8"


FRONT VIEW

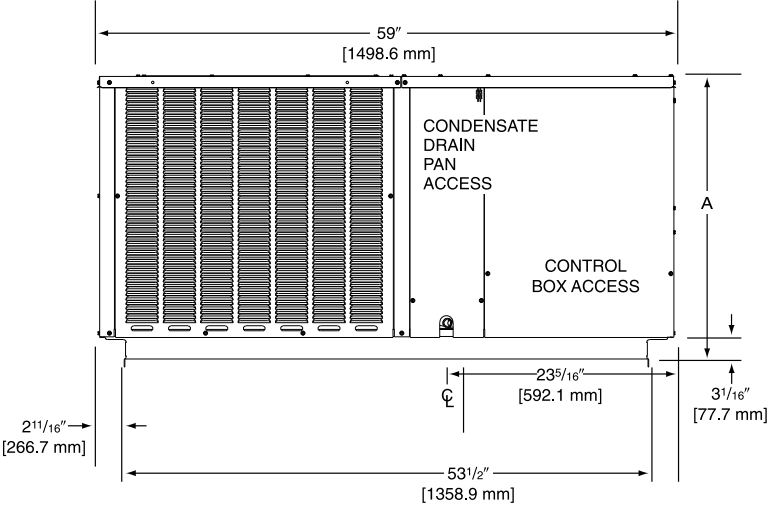


REAR VIEW

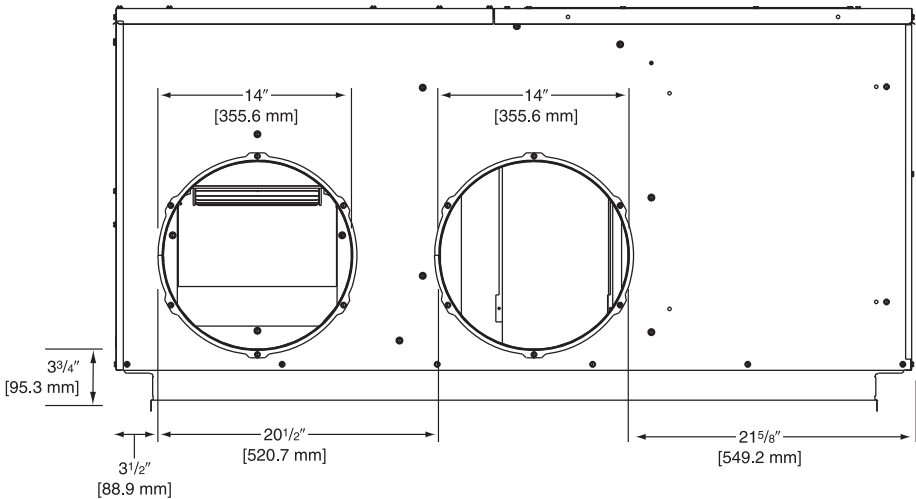



ELECTRICAL CONNECTIONS

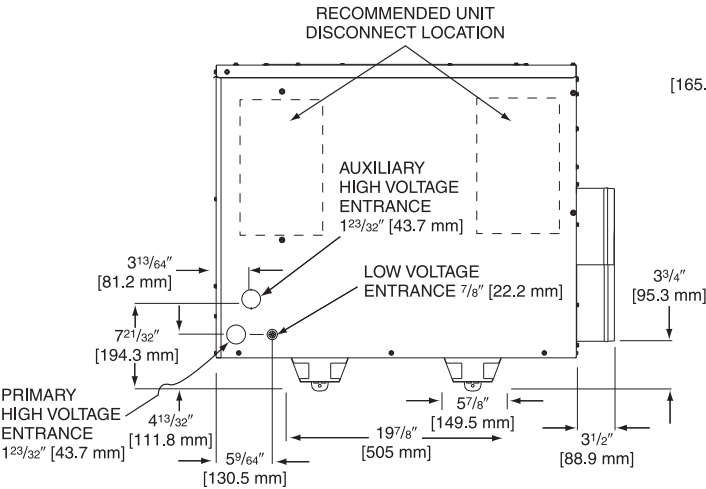

BOTTOM VIEW

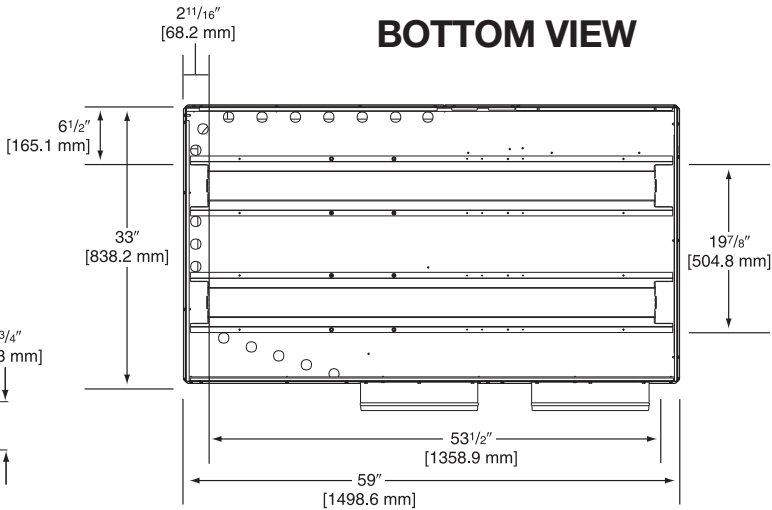

[] Designates Metric Conversions

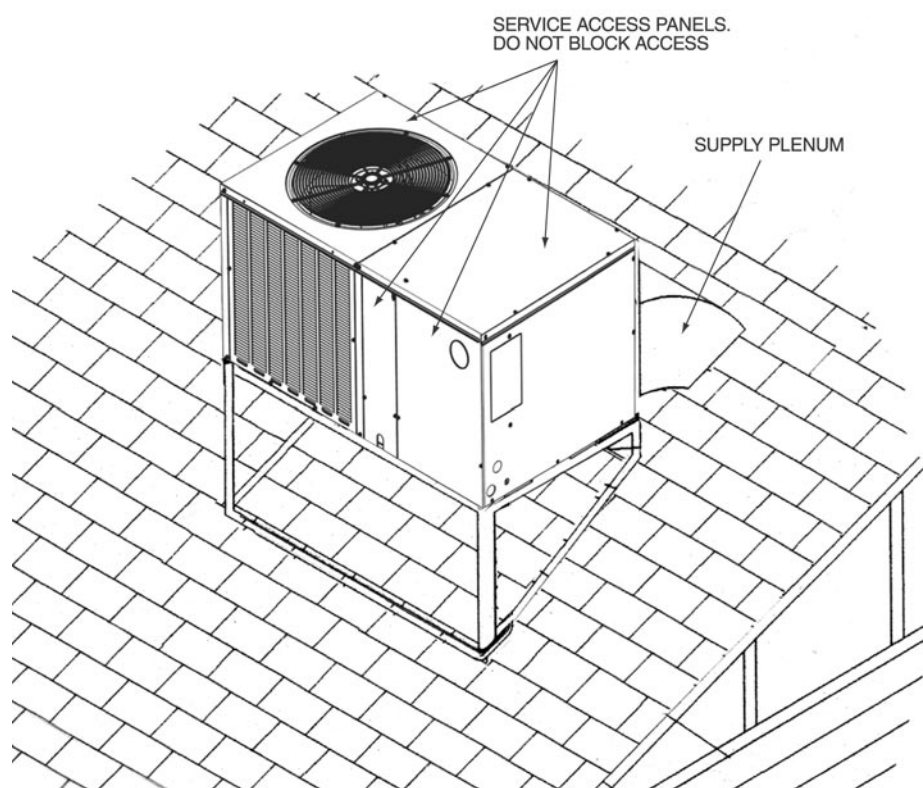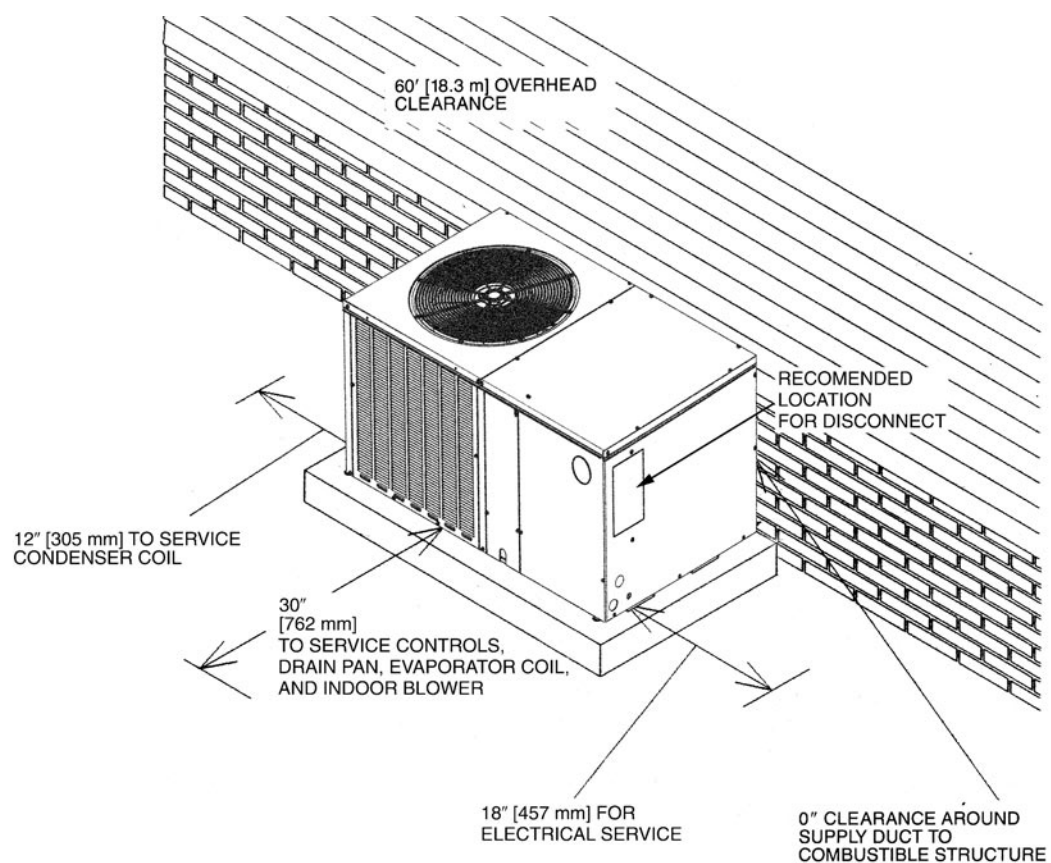

[] Designates Metric Conversions



GENERAL TERMS OF LIMITED WARRANTY*

Ruud will furnish a replacement for any part of this product which fails in normal use and service within the applicable periods stated, in accordance with the terms of the limited warranty.

***For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.**

Parts

Residential Applications
(Registration Required)Ten (10) Years
Commercial ApplicationsOne (1) Year

Compressor

1 Phase, Residential Applications.....Ten (10) Years
1 & 3 Phase, Commercial ApplicationsFive (5) Years

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

© 2025 Rheem Manufacturing Company. Trademarks are property of their respective owners.

In keeping with its policy of continuous progress and product improvement, manufacturer reserves the right to make changes without notice.

5600 Old Greenwood Road
Fort Smith, Arkansas 72908 • Ruud.com

125 Edgeware Road, Unit 1
Brampton, Ontario • L6Y 0P5