



PROJECT NAME							
LOCATION							
ARCHITECT							
ENGINEER							
CONTRACTOR							
SUBMITTED BY	DATE						
UNIT SUMMARY							
Quantity							
Unit Designation							
Model No.							
Total Cooling							
Sensible Cooling							
Air Ent. Evaporator							
Air Lvg. Evaporator							
Heating Input							
Heating Output							
CFM/ESP							
EER/SEER							
Electrical							
Minimum Ampacity							
Min.-Max. Breaker							
Net Unit Weight							
Accessory							
Catalog Form Number							
ACCESSORIES:	NOTES:						

Vantix® Line SA15AY iM Air Conditioners
Cooling Efficiencies up to: 16.0 SEER2 / 13.0 EER2
Nominal Sizes: 1.5 to 5 Tons [5.3 to 17.6 kW]
Cooling Capacities: 17.1 to 56.0 kBtu [5.0 to 16.4 kW]
Refrigerant Type: R-454B

JOB NAME _____ LOCATION _____
 CONTRACTOR _____ ORDER NO. _____
 ENGINEER _____ UNIT MODEL NO. _____
 SUBMITTED FOR APPROVAL RECORD COIL MODEL NO. _____
 DATE _____ AIR HANDLER MODEL NO. _____

UNIT DATA**COOLING PERFORMANCE**

EFFICIENCY SEER
 TOTAL CAPACITY* MBH [kW]
 SENSIBLE CAPACITY* MBH [kW]
 OUTDOOR DESIGN TEMP..... °F [°C] DB
 TEMP. OF AIR ENTERING
 EVAPORATOR COIL..... °F [°C] DB
 °F [°C] WB
 POWER INPUT REQUIREMENT kW
 (*uses blower motor heat)

HEATING PERFORMANCE

EFFICIENCY HSPF
 TOTAL CAPACITY* MBH [kW]
 OUTDOOR DESIGN TEMP..... °F [°C] DB
 TEMP. OF AIR ENTERING
 EVAPORATOR COIL..... °F [°C] DB

SUPPLY AIR BLOWER PERFORMANCE

TOTAL AIR SUPPLY CFM [L/s]
 TOTAL RESISTANCE EXTERNAL
 TO UNIT IWG
 BLOWER SPEED RPM
 POWER OUTPUT REQUIREMENT BHP
 MOTOR RATING HP [W]
 POWER INPUT REQUIREMENT kW

ELECTRICAL DATA

POWER SUPPLY Hz
 TOTAL UNIT AMPACITY AMPS
 MINIMUM WIRE SIZE AWG
 MAXIMUM OVERCURRENT DEVICE
 FUSES/HACR BREAKER AMPS

CLEARANCES

ACCESS SIDE	24" [609.6 mm]
AIR INLETS	12" [304.8 mm]
ABOVE UNIT	60" [1524 mm]

FEATURES

- 7mm Condenser Copper Coil:** Requires less refrigerant allowing for a smaller and lighter footprint while enhancing reliability
- Expanded Valve Space:** 3 in. – 4 in. – 5 in. service valve space – provides a minimum working area of 27-square inches for easier access
- Triple Service Access:** 15 in. wide, industry leading corner service access, two fastener, removable corner and individual louver panels – makes repairs easier and faster
- Swept Wing Fan Technology¹:** Features quieter operation and improved unit acoustics.
- Refrigerant Detection System^{TM2}:** An integrated one-box, patented design featuring the A2L sensor and mitigation board, offering easier commissioning with a single component and simplified wiring configuration, compatibility with any 24V thermostat application and system protection by automatically pausing outdoor unit operation — if excess refrigerant is detected

ACCESSORIES/OPTIONS


Compressor Crankcase Heater.....
 Low Ambient Control.....
 Compressor Sound Cover.....
 Low Pressure Control
 High Pressure Control.....
 Liquid Line Solenoid (24 VAC, 50/60 Hz).....
 Liquid Line Solenoid (120/240 VAC, 50/60 Hz)



9001:2015



LISTED




ENERGUIDE



AHR CERTIFIED

¹Does not apply to 1.5-ton and 2-ton models. ²Factory or field-installed in the furnace coil or air handler and is applicable to the complete heating and cooling system featuring Low GWP Refrigerant (A2L).

SA15AY

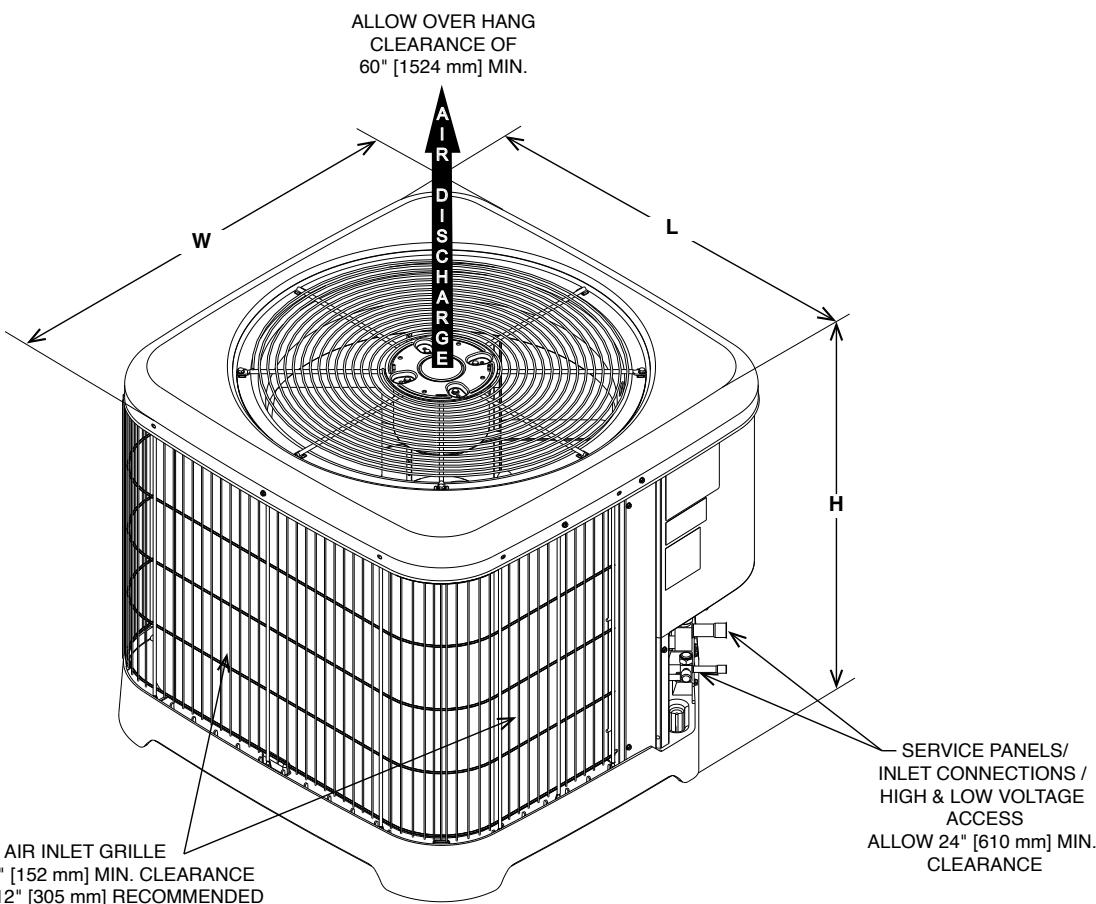

ST-A1226-24-00

Unit Dimensions

Model No.	OPERATING						SHIPPING					
	H (Height)		L (Length)		W (Width)		H (Height)		L (Length)		W (Width)	
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
SA15AY18	25.00	635	29.75	756	29.75	756	26.50	673	32.38	822	32.38	822
SA15AY24	25.00	635	33.75	857	33.75	857	26.50	673	36.38	924	36.38	924
SA15AY30	27.00	686	33.75	857	33.75	857	28.50	724	36.38	924	36.38	924
SA15AY36	31.00	787	33.75	857	33.75	857	32.50	826	36.38	924	36.38	924
SA15AY42	35.00	889	33.75	857	33.75	857	36.50	927	36.38	924	36.38	924
SA15AY48	35.00	889	33.75	857	33.75	857	36.50	927	36.38	924	36.38	924
SA15AY60	45.00	1143	35.75	908	35.75	908	46.50	1181	38.38	975	38.38	975

[] Designates Metric Conversions

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

© 2025 Rheem Manufacturing Company. Trademarks are property of their respective owners.

In keeping with its policy of continuous progress and product improvement, manufacturer reserves the right to make changes without notice.

5600 Old Greenwood Road • Fort Smith, Arkansas 72908