



The new degree of comfort.®

PROJECT NAME \_\_\_\_\_

LOCATION \_\_\_\_\_

ARCHITECT \_\_\_\_\_

ENGINEER \_\_\_\_\_

CONTRACTOR \_\_\_\_\_

SUBMITTED BY \_\_\_\_\_ DATE \_\_\_\_\_

**UNIT SUMMARY**

|                     |  |  |  |  |  |  |
|---------------------|--|--|--|--|--|--|
| Quantity            |  |  |  |  |  |  |
| Unit Designation    |  |  |  |  |  |  |
| Model No.           |  |  |  |  |  |  |
| Total Cooling       |  |  |  |  |  |  |
| Sensible Cooling    |  |  |  |  |  |  |
| Air Ent. Evaporator |  |  |  |  |  |  |
| Air Lvg. Evaporator |  |  |  |  |  |  |
| Heating Input       |  |  |  |  |  |  |
| Heating Output      |  |  |  |  |  |  |
| CFM/ESP             |  |  |  |  |  |  |
| EER/SEER            |  |  |  |  |  |  |
| Electrical          |  |  |  |  |  |  |
| Minimum Ampacity    |  |  |  |  |  |  |
| Min.-Max. Breaker   |  |  |  |  |  |  |
| Net Unit Weight     |  |  |  |  |  |  |
| Accessory           |  |  |  |  |  |  |
| Catalog Form Number |  |  |  |  |  |  |

**ACCESSORIES:**

**NOTES:**

# Endeavor® Line RACAZR iR Packaged Gas Electric Cooling Efficiencies up to: 13.4 SEER2 Nominal Sizes: 2–5 Ton [7.03 kW–17.58 kW]

JOB NAME \_\_\_\_\_ LOCATION \_\_\_\_\_  
 CONTRACTOR \_\_\_\_\_ ORDER NO. \_\_\_\_\_  
 ENGINEER \_\_\_\_\_ UNIT MODEL NO. \_\_\_\_\_  
 SUBMITTED FOR  APPROVAL  RECORD COIL MODEL NO. \_\_\_\_\_  
 DATE \_\_\_\_\_ AIR HANDLER MODEL NO. \_\_\_\_\_

## UNIT DIMENSIONS FOR PACKAGE AIR CONDITIONERS 3 TO 5 TON [10.6 TO 17.6 kW] MODELS

### UNIT DATA

#### COOLING PERFORMANCE

TOTAL CAPACITY\* ..... MBH  
 SENSIBLE CAPACITY\* ..... MBH  
 OUTDOOR DESIGN TEMP. .... °F [°C] DB/WB  
 TOTAL SUPPLY AIR ..... CFM [L/s]  
 TEMP. OF AIR ENTERING EVAPORATOR COIL ..... °F [°C] DB/WB  
 POWER INPUT REQUIREMENT ..... kW  
 SEER/EER RATING .....  
 (\*uses blower motor heat)

#### ELECTRIC HEAT PERFORMANCE

ELECTRIC HEAT CAPACITY ..... kW

#### SUPPLY AIR BLOWER PERFORMANCE

TOTAL SUPPLY AIR ..... CFM [L/s]  
 TOTAL RESISTANCE EXTERNAL TO UNIT ..... IWG  
 BLOWER SPEED ..... RPM  
 POWER OUTPUT REQUIREMENT ..... BHP  
 MOTOR RATING ..... HP [W]  
 POWER INPUT REQUIREMENT ..... kW

#### ELECTRICAL DATA

POWER SUPPLY ..... / /  
 TOTAL UNIT AMPACITY ..... AMPS  
 MINIMUM WIRE SIZE ..... AWG  
 MAXIMUM OVERCURRENT DEVICE FUSES HACR BREAKER ..... AMPS


#### TOTAL UNIT WEIGHT

TOTAL OPERATING WEIGHT ..... LBS [kg]  
 (including field-installed accessories)


#### CLEARANCES

FRONT ..... 48" [1219 mm]  
 CONDENSER COIL ..... 18" [457 mm]  
 DUCT SIDE ..... 12" [305 mm]  
 EVAPORATOR END ..... 36" [914 mm]  
 ABOVE UNIT ..... 60" [1524 mm]


TOP VIEW

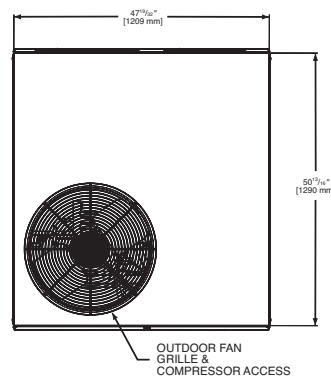


BOTTOM VIEW

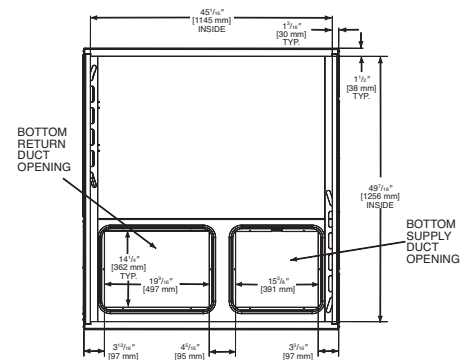

SIDE VIEW

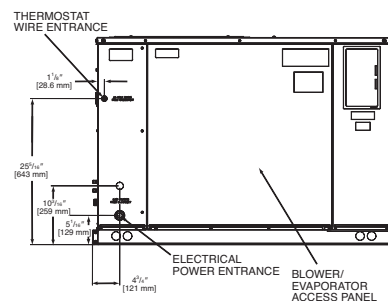


SIDE VIEW

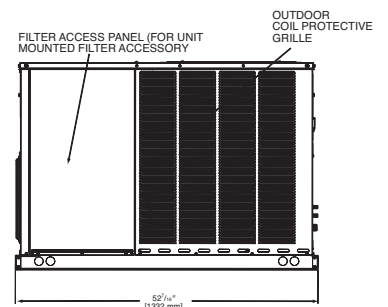


[ ] Designates Metric Conversions



## FRONT VIEW

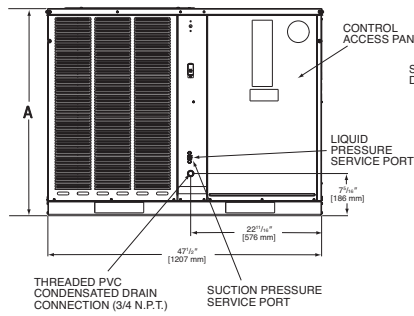

## REAR VIEW

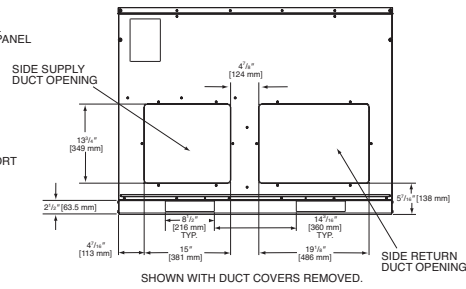

| Model #               | Height "A"                       |
|-----------------------|----------------------------------|
| 024, 030,<br>036, 042 | 35 <sup>15</sup> / <sub>16</sub> |
| 048,<br>060           | 41                               |

**IMPORTANT:**  
Unit must be level to  
prevent water migration.

[ ] Designates Metric Conversions

## FEATURES

- All models feature Scroll® compressors for maximum efficiency and quiet operation.
- Louvered condenser compartment to protect the coil against yard hazards and/or weather extremes.
- One-piece top with a drip flange to help keep water out of the unit.
- Drawn supply and return air openings feature a one-inch tall flange to prevent water migration into the ductwork.
- Access panels have “weep holes” and channels to further help manage water run-off.
- All models are shipped ready for horizontal application.
- Easily accessible blower section complete with slide-out blower.
- Refrigerant connections are conveniently located for easy service diagnostics.
- Micro Channel evaporator and condenser delivers superior performance with less refrigerant charge and less weight than conventional copper tube/aluminum fin coils. In

addition the all aluminum construction has superior protection against formicary corrosion and aluminum tube rubbing potential. It is easier to clean and has a more robust surface.

- Supplemental electric heat strips up to 15 kW are available (field installed) for periods of extreme cold temperatures. Single point wiring simplifies installation.
- Easily accessible control box.
- Thermal expansion valve standard on all models for superior superheat control, reliability, and energy efficiency at all operating conditions.
- Solid core liquid line. Filter drier standard on all models (not shown).
- Rugged baserail included for improved installation and handling.
- Molded compressor plug.
- Complete factory charged, wired and run tested.
- A double sloped evaporator coil drain pan assures all water is removed from the unit to improve indoor air quality.

## ACCESSORIES

- |  |                          |   |                          |
|--|--------------------------|---|--------------------------|
| Roofcurb RXSG-AAA08 (8" [203 mm] Height).....                                      | <input type="checkbox"/> | Rectangular to Round Transition (Downflow)<br>RXMC-CA03 (18" [457mm] Ducts) ..... | <input type="checkbox"/> |
| Roofcurb RXSG-AAA14 (14" [356 mm] Height).....                                     | <input type="checkbox"/> | Filter Kit RXRY-B01 .....   | <input type="checkbox"/> |
| Supply & Return Diffusers RXRN-BD15 .....  | <input type="checkbox"/> | Sideflow Rectangular to Round Transition AXMC-BA01.....                           | <input type="checkbox"/> |
| Economizers (Convertible) AXRD-01RACAM3.....                                       | <input type="checkbox"/> | Low Ambient Control RXRZ-B01 .....  | <input type="checkbox"/> |
| Fresh Air Damper AXRF-FAB1 (Motorized-35%).....                                    | <input type="checkbox"/> | High Pressure Control RXAB-E01<br>(standard on RACAZR) .....                      | <input type="checkbox"/> |
| Fresh Air Damper ASRF-FAA1 (Fixed 35%).....  | <input type="checkbox"/> | Low Pressure Control RXAC-C01 .....   | <input type="checkbox"/> |
| Rectangular to Round Transition (Downflow)<br>RXMC-CA02 (16" [406 mm] Ducts) ..... | <input type="checkbox"/> |   |                          |

**Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.**

5600 Old Greenwood Road  
Fort Smith, Arkansas 72908

© 2023 Rheem Manufacturing Company. Rheem, Ruud and Friedrich trademarks owned by Rheem Manufacturing Company.

*"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice."*