



The new degree of comfort.™

SUBMITTAL COVER SHEET

PROJECT NAME _____

LOCATION _____

ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

SUBMITTED BY _____ DATE _____

UNIT SUMMARY

Quantity						
Unit Designation						
Model No.						
Total Cooling						
Sensible Cooling						
Air Ent. Evaporator						
Air Lvg. Evaporator						
Heating Input						
Heating Output						
CFM/ESP						
EER/SEER						
Electrical						
Minimum Ampacity						
Min.-Max. Breaker						
Net Unit Weight						
Accessory						
Catalog Form Number						

ACCESSORIES:

NOTES:



INTEGRATED HOME COMFORT

Endeavor™ Line *Prestige*® Series Gas Furnaces



This product meets a stringent set of our internally defined sustainability standards



R97MV

97% A.F.U.E.†

EcoNet® Enabled


Heating Stages: Modulating

Motor Type: Constant CFM

Input Rates: 60 to 115 kBTU [11.6 to 33.7 kW]

Configuration Options: Downflow/Horizontal

Downflow Horizontal Applications

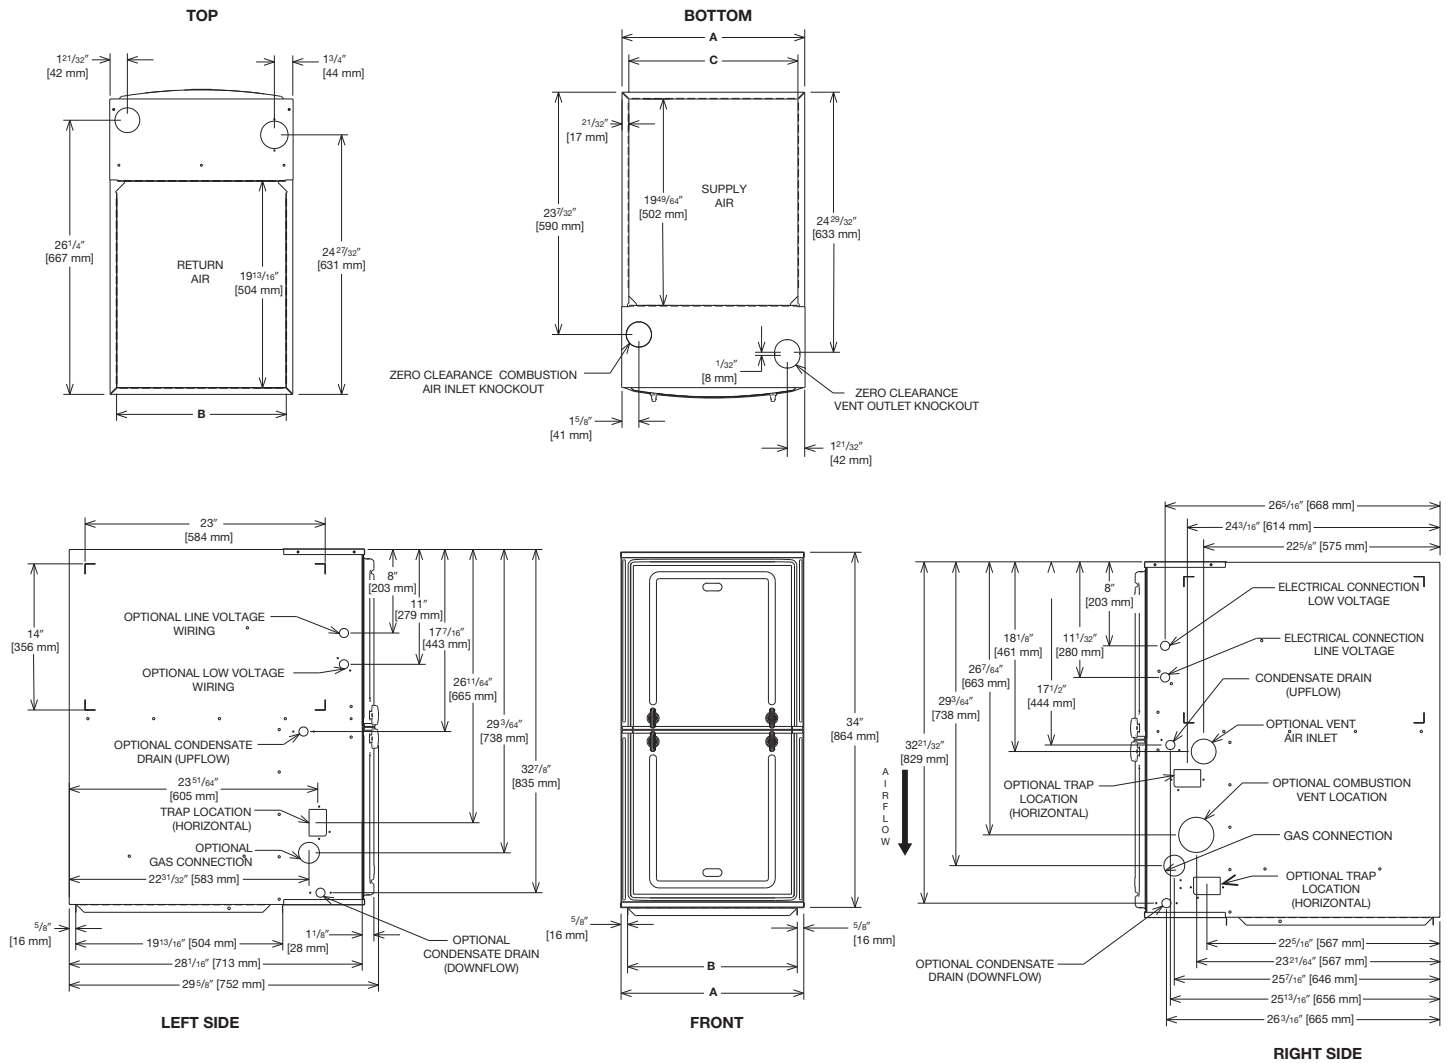

ST-A1250-03-00

Unit Dimensions (Clearance to Combustibles)

MODEL	LEFT SIDE	MINIMUM CLEARANCE (IN.) [mm]				
		RIGHT SIDE	BACK	TOP	FRONT	VENT
(-)97MV060	0	0	0	1 [25]	2 [51]	0
(-)97MV070	0	0	0	1 [25]	2 [51]	0
(-)97MV085	0	0	0	1 [25]	2 [51]	0
(-)97MV100	0	0	0	1 [25]	2 [51]	0
(-)97MV115	0	0	0	1 [25]	2 [51]	0

*A service clearance of at least 24" is recommended in front of all furnaces

FLANGE DIMENSIONS		
A	B	C
17 ¹ / ₂ [445]	16 ¹⁷ / ₆₄ [413]	16 ¹³ / ₆₄ [412]
21 [533]	19 ⁴⁹ / ₆₄ [502]	19 ⁴⁵ / ₆₄ [500]
24 ¹ / ₂ [662]	23 ¹⁷ / ₆₄ [591]	23 ¹³ / ₆₄ [589]

Supply and return depicted as downflow configuration.
Flange configuration will vary depending on installation orientation.

[] Designates Metric Conversions