



The new degree of comfort.™

# SUBMITTAL COVER SHEET

PROJECT NAME \_\_\_\_\_  
LOCATION \_\_\_\_\_  
ARCHITECT \_\_\_\_\_  
ENGINEER \_\_\_\_\_  
CONTRACTOR \_\_\_\_\_  
SUBMITTED BY \_\_\_\_\_ DATE \_\_\_\_\_

## UNIT SUMMARY

|                     |  |  |  |  |  |  |
|---------------------|--|--|--|--|--|--|
| Quantity            |  |  |  |  |  |  |
| Unit Designation    |  |  |  |  |  |  |
| Model No.           |  |  |  |  |  |  |
| Total Cooling       |  |  |  |  |  |  |
| Sensible Cooling    |  |  |  |  |  |  |
| Air Ent. Evaporator |  |  |  |  |  |  |
| Air Lvg. Evaporator |  |  |  |  |  |  |
| Heating Input       |  |  |  |  |  |  |
| Heating Output      |  |  |  |  |  |  |
| CFM/ESP             |  |  |  |  |  |  |
| EER/SEER            |  |  |  |  |  |  |
| Electrical          |  |  |  |  |  |  |
| Minimum Ampacity    |  |  |  |  |  |  |
| Min.-Max. Breaker   |  |  |  |  |  |  |
| Net Unit Weight     |  |  |  |  |  |  |
| Accessory           |  |  |  |  |  |  |
| Catalog Form Number |  |  |  |  |  |  |

### ACCESSORIES:



### NOTES:



INTEGRATED HOME COMFORT


PRINTED IN U.S.A 01/12 QG FORM NO. M11-1640



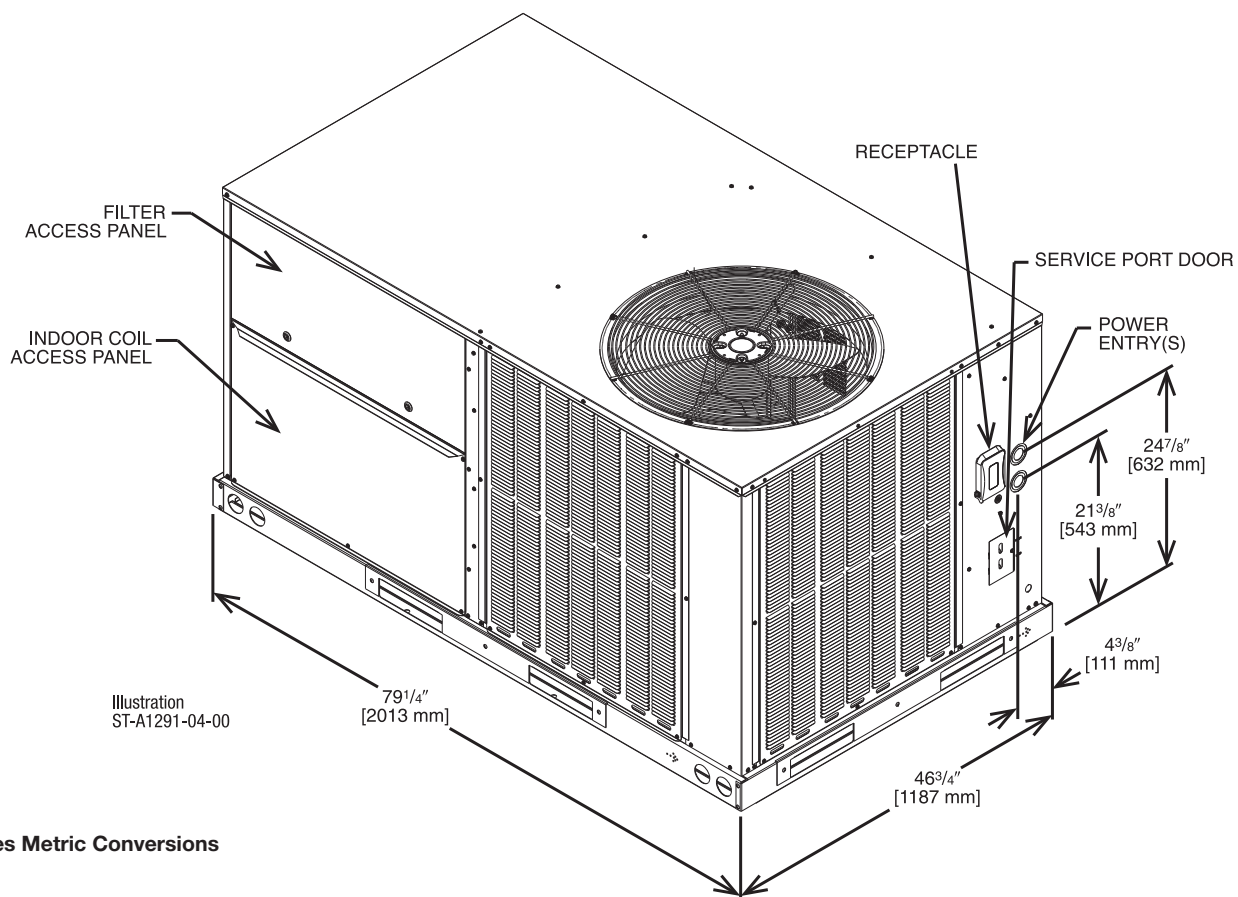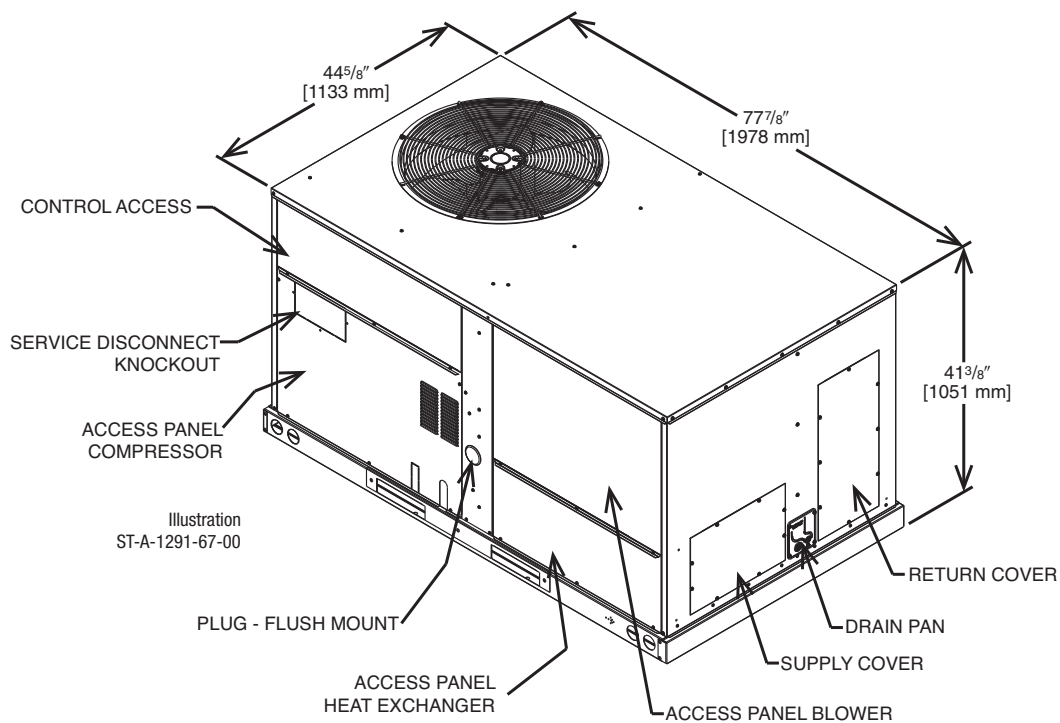


[ ] Designates Metric Conversions


SUPPLY AND RETURN DIMENSIONS FOR  
HORIZONTAL APPLICATIONS

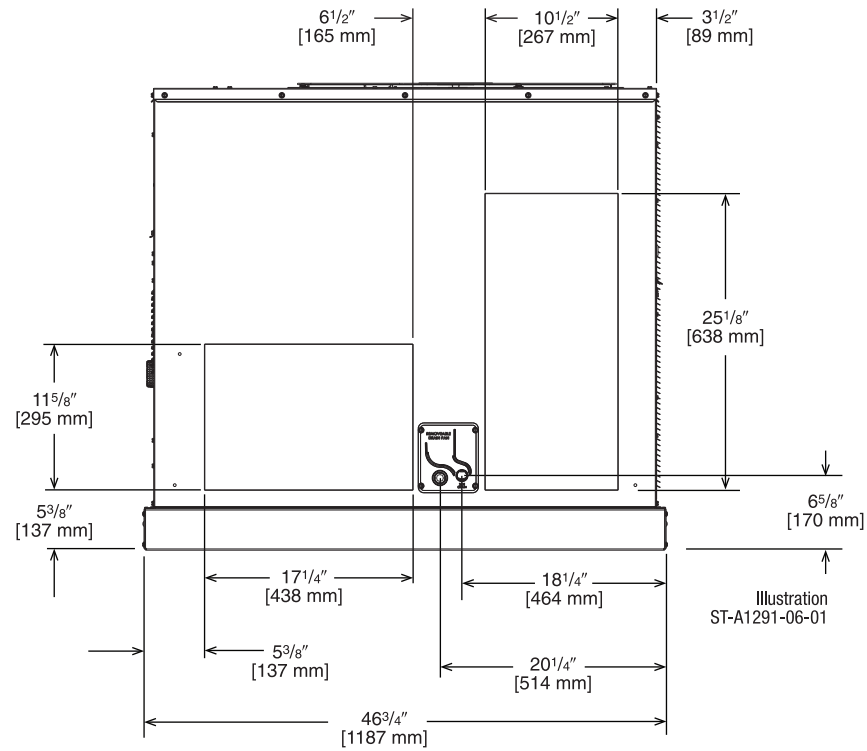

SUPPLY AND RETURN DIMENSIONS FOR  
DOWNFLOW APPLICATIONS

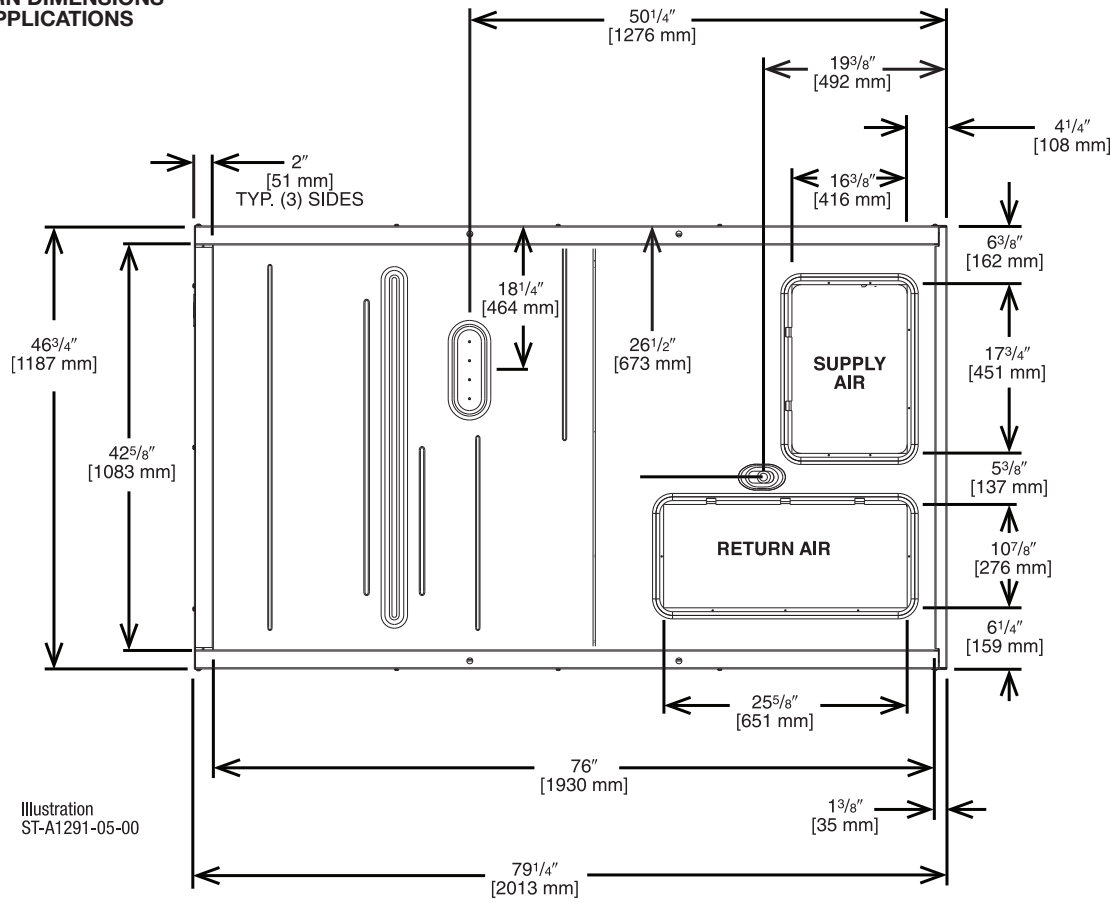

[ ] Designates Metric Conversions

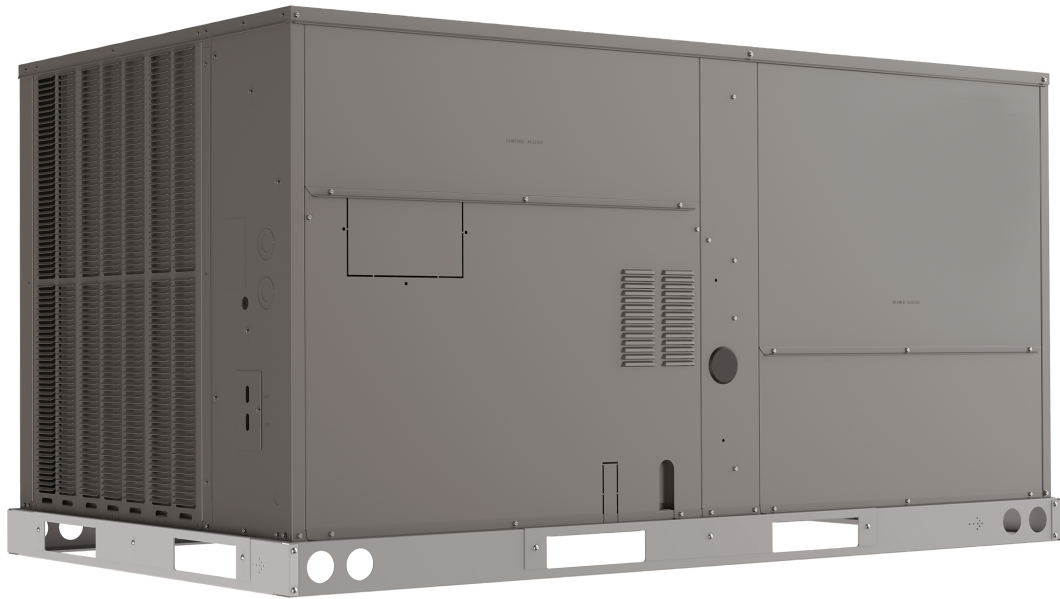

## RACC STANDARD FEATURES INCLUDE:

- Factory charged with R-410A HFC refrigerant
- Wired and run tested
- Scroll compressors with internal line break overload and high pressure protection
- Model RACC has a single-stage compressor
- Convertible airflow – vertical down flow or horizontal side flow
- Forkable base rails for easy handling and lifting
- Cooling operation up to 125°F ambient
- MicroChannel evaporator and condenser coil
- PlusOne® ServiceSmart package includes:
  - Qwik-Change Flex-Fit Rack™
  - Qwik-Slide Blower Assembly™
  - Qwik-Clean Drain Pan™
- Over-flow condensate sensor
- PlusOne® Diagnostics with Dual 7-Segment LED Display to meet code compliance
- One-piece top cover and base pan with drawn supply and return opening
- Two-piece control door
- ¼ turn fasteners on filter access door
- Color-coded and labeled wiring
- External lockable gauge ports
- TXV refrigerant metering system
- Solid-core liquid line filter drier
- High pressure and low pressure/loss of charge protection with built-in Smart Logic
- Insulation encapsulated throughout entire unit
- New product footprint with matching connections
- Improved factory lead times