

PROJECT NAME		
LOCATION		
ARCHITECT		
ENGINEER		
CONTRACTOR		
SUBMITTED BY	DATE	
	UNIT SUMMARY	
Quantity		
Unit Designation		
Model No.		
Total Cooling		
Sensible Cooling		
Air Ent. Evaporator		
Air Lvg. Evaporator		
Heating Input		
Heating Output		
CFM/ESP		
EER/SEER		
Electrical		
Minimum Ampacity		
MinMax. Breaker		
Net Unit Weight		
Accessory		
Catalog Form Number		
ACCESSORIES:	NOTES:	

# Vantix<sup>™</sup> Line SP15AZ iM Heat Pumps Cooling Efficiencies up to: 16 SEER2/11.7 EER2 Heating Efficiencies up to: 8.1 HSPF2 Nominal Sizes: 1.5 to 5 Ton [5.3 to 17.6 kW]

JOB NAME		 LOCATION
CONTRACTOR		 ORDER NO.
ENGINEER		 UNIT MODEL NO
SUBMITTED FOR	☐ APPROVAL	COIL MODEL NO
DATE		 AIR HANDLER MODEL NO

#### **UNIT DATA**

#### **COOLING PERFORMANCE**

EFFICIENCY	SEER
TOTAL CAPACITY*	MBH [kW]
SENSIBLE CAPACITY*	MBH [kW]
OUTDOOR DESIGN TEMP	°F [°C] DB
TEMP. OF AIR ENTERING EVAPORATOR COIL	
	°F [°C] WB
POWER INPUT REQUIREMENT (*uses blower motor heat)	kW

#### **HEATING PERFORMANCE**

EFFICIENCY	HSPF
TOTAL CAPACITY*	MBH [kW]
OUTDOOR DESIGN TEMP	°F [°C] DB
TEMP. OF AIR ENTERING EVAPORATOR COIL	°F [°C] DB

#### **SUPPLY AIR BLOWER PERFORMANCE**

TOTAL AIR SUPPLY CFM [L/s]	
TOTAL RESISTANCE EXTERNAL TO UNIT IWG	
BLOWER SPEEDRPM	
POWER OUTPUT REQUIREMENT BHP	
MOTOR RATING HP [W]	
POWER INPUT REQUIREMENT kW	

#### **ELECTRICAL DATA**

POWER SUPPLY	Hz
TOTAL UNIT AMPACITY	AMPS
MINIMUM WIRE SIZE	AWG
MAXIMUM OVERCURRENT DEVICE FUSES/HACR BREAKER	AMPS

#### CLEARANCES

ACCESS SIDE	24" [609.6 mm]
AIR INLETS	12" [304.8 mm]
ABOVE UNIT	60" [1524 mm]

#### **FEATURES**

- Two-Stage Scroll Compressor: Features two speeds (high and low) of cooling and heating, providing more precise temperature control, lower humidity and greater efficiency when compared to single stage compressors
- 7 mm Condenser Copper Coil<sup>1</sup>: Requires less refrigerant allowing for a smaller and lighter footprint while enhancing reliability
- Inverted Reversing Valve: Allows for faster heat transfer with gravity assist shifting and reduced joint stress for increased reliability
- Expanded Valve Space: 3 in. 4 in. 5 in. service valve space provides a minimum working area of 27-square inches for easier access
- Triple Service Access: 15 in. wide, industry leading access makes repairs easier and faster

# ACCESSORIES/OPTIONS Compressor Crankcase Heater.....

Low Ambient Control
Compressor Sound Cover
Compressor Hard Start Kit
Low Pressure Control
High Pressure Control
Liquid Line Solenoid (24 VAC, 50/60 Hz)
Liquid Line Solenoid (120/40 VAC, 50/60 Hz)

<sup>1</sup>Does not apply to the 5 ton model










\*Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet Energy Star.

Ask your Contractor for details or visit www.energystar.gov.

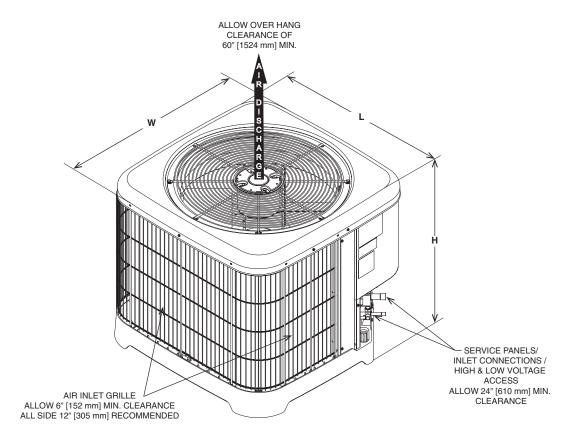

ST-A1226-24-00

## [ ] Designates Metric Conversions

# **Unit Dimensions**

		OPERATING						SHIPPING					
MODEL NO.	H (Height)		L (Length)		W (Width)		H (Height)		L (Length)		W (Width)		
110.	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	
SP15AZ18AJ2NA	25.00	635.00	29.75	755.65	29.75	755.65	27.90	708.66	33.25	844.55	33.25	844.55	
SP15AZ24AJ2NA	25.00	635.00	29.75	755.65	29.75	755.65	27.90	708.66	33.25	844.55	33.25	844.55	
SP15AZ30AJ2NA	35.00	889.00	33.75	857.25	33.75	857.25	38.35	974.09	37.64	956.06	37.64	956.06	
SP15AZ36AJ2NA	39.00	990.60	33.75	857.25	33.75	857.25	42.35	1075.69	37.64	956.06	37.64	956.06	
SP15AZ42AJ2NA	39.00	990.60	33.75	857.25	33.75	857.25	42.35	1075.69	37.64	956.06	37.64	956.06	
SP15AZ48AJ2NA	39.00	990.60	33.75	857.25	33.75	857.25	42.35	1075.69	37.64	956.06	37.64	956.06	
SP15AZ60AJ2NA	51.00	1295.40	35.75	908.05	35.75	908.05	54.50	1384.30	39.37	1000.00	39.37	1000.00	

### [ ] Designates Metric Conversions

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

5600 Old Greenwood Road Fort Smith, Arkansas 72908