



The new degree of comfort.™



Residential Electric  
**Marathon Point-of-Use  
Water Heaters**

## Marathon® Point-of-Use non-metallic electric water heaters are durable, lightweight, easy to install and offer a longer warranty

### Non-metallic Tank Features

- Seamless, blow-molded, polybutene tank – impervious to rust and corrosion
- Multiple layers of filament wound fiberglass give the tank unmatched strength
- Polyurethane insulation helps reduce energy consumption and standby heat loss
- Recessed drain valve is out of the way of brooms and scrubbers
- High temperature polysulfone dip tube
- Tough molded polyethylene outer shell resists dents, scratches, and salt air
- All plastic tank eliminates the need for an anode rod

### Easy Installation & Service

- Marathon point-of-use's lightweight tank is easy to maneuver and position
- Bowl shaped tank bottom allows complete sediment draining
- Water tight grommets keep out overhead moisture and condensation
- 3/4-Inch inlet and outlet connections
- Built for applications where larger water heaters won't fit, such as apartments, recreational property, and restrooms in offices and commercial buildings

### Element Wattage and Voltage

- 15 and 20-Gallon with a 2,000 watt element and 120-voltage; 20-gallon with a 3,000 watt element and 240-voltage

### Plus...

- Thermally fused element to protect against dry-firing; low watt, density for long life
- Full-flow, brass drain valve
- Temperature and pressure relief valve
- Low Lead compliant
- Standard replacement parts

### Warranty


- Residential Application: Lifetime limited warranty on tank and 6-years on parts\*
- Commercial Application: 5-year limited tank warranty and 1-year on parts†

\* Warranty is provided to original customer in a residential application after online product registration is complete. Registration must be completed within 90 days of installation.

† See Warranty Certificate for complete information



**Marathon  
Point-of-Use**  
15 and 19.9-U.S. Gallon Capacities  
Electric

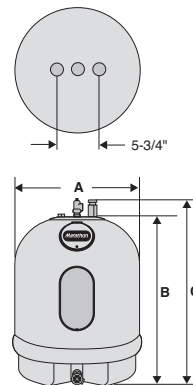

MODEL NUMBER	STORAGE CAPACITY		FEATURES		ROUGHING IN DIMENSIONS (SHOWN IN INCHES)				ENERGY INFO.
	U.S. GAL.	IMP. GAL.	ELEMENT WATTAGE	VOLTAGE	TANK DIAMETER A	TANK HEIGHT B	HEIGHT TO WATER CONN. C	APPROX. SHIP WT. (LBS)	STANDBY WATT LOSS
CMR15120	15	12	2000	120	21-3/4	31-3/4	35-3/4	58	N/A
CMR20120	19.9	17	2000	120	23-1/2	30-1/2	34-1/2	61	N/A
CMR20230	19.9	17	3000	240	23-1/2	30-1/2	34-1/2	61	N/A

*In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.*

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1  
Brampton, Ontario L6Y 0P5 • www.rheem.ca



INTEGRATED HOME COMFORT