

# The new degree of comfort."

PROJECT NAME LOCATION ARCHITECT ENGINEER CONTRACTOR		
SUBMITTED BY	DATE _	
UN	IT SUMMARY	
Quantity		
Unit Designation		
Model No.		
Total Cooling		
Sensible Cooling		
Air Ent. Evaporator		
Air Lvg. Evaporator		
Heating Input		
Heating Output		
CFM/ESP		
EER/SEER		
Electrical		
Minimum Ampacity		
MinMax. Breaker		
Net Unit Weight		
Accessory		
Catalog Form Number		
ACCESSORIES:	NOTES:	

# Endeavor® Line (-)P18AZ iM Heat Pumps Cooling Efficiencies up to: 20.0 SEER2/12.5 EER2 Heating Efficiencies up to: 8.5 HSPF2 Nominal Sizes: 2 to 5 Ton [7.0 to 17.6 kW]

UNIT D			EcoNet® De product medie a simpgert set et cur	
DATE			AIR HANDLER MODEL NO	
SUBMITTED FOR	☐ APPROVAL	$\square$ RECORD	COIL MODEL NO	
ENGINEER			UNIT MODEL NO	
CONTRACTOR			ORDER NO	
JOB NAME			LOCATION	

EFFICIENCY	SEER
TOTAL CAPACITY*	_ MBH [kW]
SENSIBLE CAPACITY*	_ MBH [kW]
OUTDOOR DESIGN TEMP	_ °F [°C] DB
TEMP. OF AIR ENTERING EVAPORATOR COIL	_ °F [°C] DB _ °F [°C] WB
POWER INPUT REQUIREMENT(*uses blower motor heat)	kW

### **HEATING PERFORMANCE**

EFFICIENCY	HSPF
TOTAL CAPACITY*	MBH [kW]
OUTDOOR DESIGN TEMP	°F [°C] DB
TEMP. OF AIR ENTERING EVAPORATOR COIL	°F [°C] DB

# **SUPPLY AIR BLOWER PERFORMANCE**

TOTAL AIR SUPPLY CFM [L/s]
TOTAL RESISTANCE EXTERNAL TO UNITIWG
BLOWER SPEEDRPM
POWER OUTPUT REQUIREMENT BHP
MOTOR RATING HP [W]
POWER INPUT REQUIREMENT kW

### **ELECTRICAL DATA**

POWER SUPPLY	Hz
TOTAL UNIT AMPACITY	AMPS
MINIMUM WIRE SIZE	AWG
MAXIMUM OVERCURRENT DEVICE FUSES/HACR BREAKER	_AMPS

#### **CLEARANCES**

ACCESS SIDE	24" [609.6 mm]
AIR INLETS	12" [304.8 mm]
ABOVE LINIT	60" [1524 mm]





#### **FEATURES**

- EcoNet® Enabled: Automatic system configuration and optimization
- PlusOne® Diagnostics & Bluetooth Connectivity: With the Contractor & EcoNet® Apps, built-in technology makes advanced set-up, monitoring, troubleshooting and repairing the product easier than
- Variable Speed Scroll Compressor & Inverter Drive:
  - Features variable speed operation from 40 to 100% capacity with the EcoNet® Smart Thermostat
  - Offers overdrive capability up to 115% to maintain performance in extreme conditions
  - Provides precise temperature control, advanced humidity control and greater efficiency
- Brushless DC Condenser Motors (BLDC): Enhances reliability and allows for easier serviceability
- Swept Wing Fan Technology: Features quieter operation and improved unit acoustics

#### **ACCESSORIES/OPTIONS**

EcoNet® Smart Thermostat	
Heat Pump Riser 6 in.	ı
Supply/Return Sensor (RXHT-A02)	










# (-)P18AZ

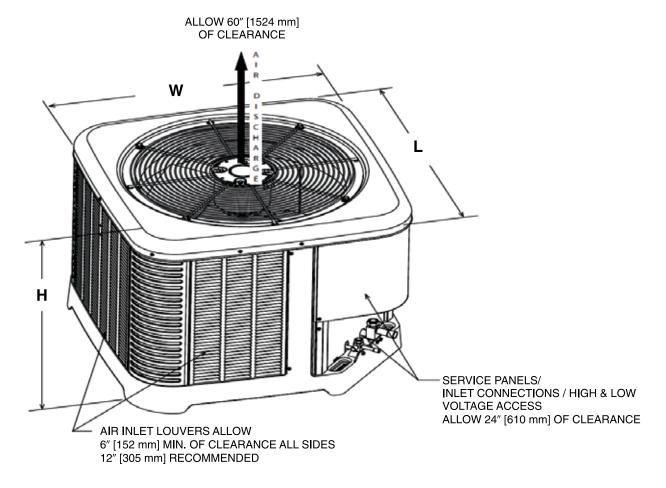

ST-A1226-02-00

## **Unit Dimensions**

	OPERATING					SHIPPING						
MODEL NO.	H (He	eight)	L (Le	ngth)	W (Width)		H (Height)		L (Length)		W (Width)	
	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm
(-)P18AZ24AJVCA	45.17	1147	36.13	918	36.13	918	48.18	1224	39.37	1000	39.64	1007
(-)P18AZ36AJVCA	51.17	1300	36.13	918	36.13	918	53.56	1360	39.37	1000	39.64	1007
(-)P18AZ48AJVCA	51.17	1300	36.13	918	36.13	918	53.56	1360	39.37	1000	39.64	1007
(-)P18AZ60AJVCA	51.17	1300	36.13	918	36.13	918	53.56	1360	39.37	1000	39.64	1007

#### [ ] Designates Metric Conversions

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

Rheem Sales Company, Inc. 5600 Old Greenwood Road Fort Smith, Arkansas 72908

© 2023 Rheem Manufacturing Company. Rheem and Ruud trademarks owned by Rheem Manufacturing Company.

"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice."

PRINTED IN U.S.A. 8-23 QG FORM NO. X33-1609 REV. 1