




## Professional Achiever™ electric water heaters are engineered for longer life – resistored heating elements and premium grade anode rod

### Efficiency

- Standby watts loss 61 - 80
- Isolated tank design reduces conductive heat loss
- Resistored copper upper element and resistored Lifeguard™ stainless steel lower element to prolong anode rod and tank life



### Performance

- FHR: 42 - 99 US gallons, based on gallon capacity
- Recovery rate is 21 US gallons at a 90 degree Fahrenheit rise

### Longer Life

- Premium grade anode rod provides long-lasting tank protection

### Features

- Electric junction box located above heating elements for easy installation
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature

### Plus...

- EverKleen™ self cleaning device fights harmful sediment build-up with a high-velocity spiraling water stream – helps operating efficiency by saving energy, money and improving tank life
- Enhanced-flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant

### Warranty

- 6-Year limited tank and parts warranty\*
- With ProtectionPlus™ the 6-year limited tank warranty becomes 10-year ProtectionPlus™ – order part number SP20904 (6 pack only)
- With ProtectionPlus™ the 6-year limited tank warranty becomes 8-year ProtectionPlus™ – order part number SP20081 (6 pack only)

\*See Residential Warranty Certificate for complete information



**Professional Achiever™**  
40 and 60-Imperial Gallon  
Capacities  
120 to 240 Volt AC/Single Phase  
Double Element Models  
Electric



See dimensions chart on back.

*In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.*




MODEL NUMBER	DESCRIPTION				FEATURES						ROUGHING IN DIMENSIONS					
	STORAGE CAPACITY			ELEM. QTY	120 VOLT		208 VOLT		240 VOLT		HEIGHT (IN.) A	OUTSIDE DIAMETER (IN) B	HEIGHT TO DRAIN VALVE (IN) C	ESTIMATED SHIP WEIGHT		STANDBY WATT LOSS
	USG	IMP. GALS	LITRES		WATT	AMPS.	WATT	AMPS.	WATT	AMPS.				LBS.	KG	
PROE40 M2 CD61	45	39	178	2	N/A	N/A	N/A	N/A	3000	12.5	48	21-3/4	3-1/2	117	53	61
PROE40 M2 CD61	45	39	178	2	N/A	N/A	3380	15.8	4500	18.8	48	21-3/4	3-1/2	117	53	61
PROE40 M2 CD61	45	39	178	2	N/A	N/A	2855	13.7	3800	15.8	48	21-3/4	3-1/2	117	53	61
PROE40 M2 CD61	45	39	178	2	N/A	N/A	N/A	N/A	6000	25	48	21-3/4	3-1/2	117	53	61
PROE54 T2 CD68	61	51	231	2	N/A	N/A	4500	18.8	N/A	N/A	58-3/4	23	3-1/2	167	76	70
PROE54 T2 CD68	61	51	231	2	N/A	N/A	N/A	N/A	4500	18.8	58-3/4	23	3-1/2	167	76	70
PROE54 T2 CD68	61	51	231	2	1500	12.5	N/A	N/A	N/A	N/A	58-3/4	23	3-1/2	167	76	70
PROE60 T2 CD80	72	63	285	2	N/A	N/A	3380	16.3	4500	18.8	59.55	23-3/4	3-1/2	176	80	80
PROE60 T2 CD77	72	63	285	2	N/A	N/A	3380	16.3	4500	18.8	59	24-1/2	3-1/2	188	85	77

- Special Wiring Options – A limited number of special wiring options are available. Consult factory for price and availability.
- All models equipped with heat traps.
- Complies with ON/BC/QC energy efficiency requirements. ON/BC/QC 40 imperial gallon top inlet models will have side T&P.

\*\*Recovery = wattage/2.42 x temp. rise °F.  
 Example:  $\frac{4500W}{2.42 \times 90^\circ} = 21 \text{ GPH}$

\*\*Recovery calculations used are based on 4500 watt elements used in non-simultaneous operation.

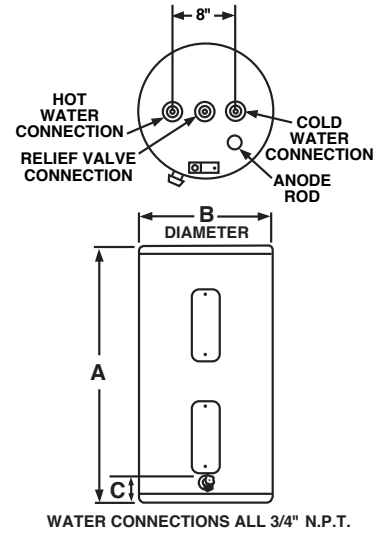

*In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.*