



engineered for life™

Professional *Classic*® Direct Vent Co-Axial gas water heaters for Manufactured Housing that are FVIR compliant

Efficiency

- .58 - .60 UEF

Performance

- FHR: 65 gallons for 50-gallon model and 63 gallons for 40-gallon model
- Recovery: 30.3 to 36.4 GPH at a 90° F rise, depending on model

Flexibility

- Field convertible controls and burner assembly for natural gas or LP operation included
- Roof jack flange adjustment range available up to 34° (8 - 12)
- New smaller foot print – no external air tube
- Can be installed anywhere in the home
- 3/4" hot and cold top connections
- Easily fits into a standard drain pan

Altitude Certification


- All models certified up to 10,000 ft. above sea level

Low Emissions

- Eco-friendly burner, low NOx design
- Meets 40 ng/J NOx requirements

Longer Life

- Premium grade anode rod provides long-lasting tank protection

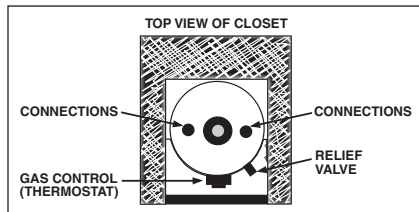

Self Cleaning

- EverKleen® system fights sediment build-up

Plus...

- Certified for manufactured (HUD) and modular construction
- Enhanced flow brass drain valve
- Factory installed temperature and pressure relief valve – side location
- Low lead compliant
- Piezo ignition – easy light pilot, no matches required

Warranty

- 6-Year limited tank and parts warranty*

*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



Professional *Classic* Direct Vent Co-Axial for Manufactured Housing

40 and 50-Gallon Capacities
Up to 36,000 BTU/h
Natural and LP Gas




CO-AXIAL ROOF JACK SIZING TABLE

34° MAX. (8-12 PITCH) ROOF JACK KIT PART NUMBER	ROOF JACK ADJUSTMENT RANGE (SEE X)
AP14363A	24 - 37 Inches
AP14363B	33 - 68 Inches
AP14363C	45 - 97 Inches
AP14363D	60 - 130 Inches
AP14363E	72 - 160 Inches

NOTE: 42° Max. adjustment roof jacks available.

Roof Jacks must be ordered separately with this direct vent water heater and installed in accordance with the instructions furnished with the heater. No other roof jack or vertical vent kit is approved for installation with this water heater.

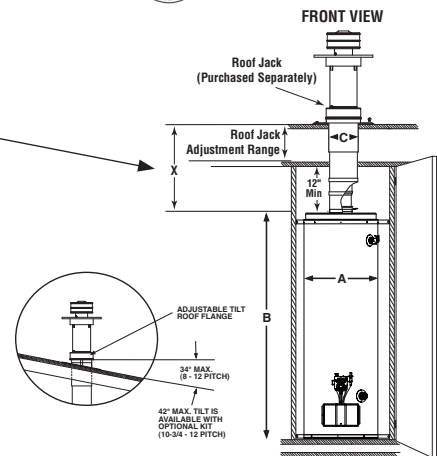

DESCRIPTION				FEATURES						ROUGHING IN DIMENSIONS (SHOWN IN INCHES)					ENERGY INFO.
T Y P E	NOMINAL GALLON CAPACITY	RATED GALLON CAPACITY	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H		RECOVERY IN G.P.H. 90° F RISE		FIRST HOUR RATING (GALLONS)		DIAM. A	TANK HEIGHT B	VENT SIZE C	WATER CONN. SIZE	SHIP WT. (LBS)	UNIFORM ENERGY FACTOR (UEF)
				NAT.	LP	NAT.	LP	NAT.	LP						
Tall	40	38	PROG40-36N RH62 MH DVX	36	30	36.4	30.3	63	63	19-3/4	60-1/2	5	3/4	155	0.60
Tall	50	48	PROG50-36N RH60 MH DVX	36	32	36.4	32.3	65	65	21-3/4	59-5/8	5	3/4	165	0.58

Uniform Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 1115 Northmeadow Parkway, Suite 100
Roswell, Georgia 30076 • www.Rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • www.Rheem.ca

FORM NO. 05.25-RH-PRO-DVC-MH-SS