



Light-Duty Commercial Electric Water Heaters

With easy field-level conversion for multiple light duty applications

Flexible design for a variety of light duty applications

- 66 - 119.9-Gallon models
- 208/240/277/480 Voltages available on all models
- 66, 80 and 119.9-Gallon models only available in 12.1 kW
- Factory shipped in simultaneous configuration

FEATURES & BENEFITS	
Terminal Block	Easy to convert standard models from simultaneous to non-simultaneous, single phase to three phase
	Available on 66 - 119.9-gallon models
Wiring Options	Custom field level configuration based on application requirements
	Simultaneous wiring
	Single & three phase CONVERTABLE
Energy Efficient Design	Reduces energy consumption & standby heat loss with 2-1/2" of rigid polyurethane foam insulation
Designed for Long Life & Top Performance	Proprietary protective steel formulation with a unique coat of high temperature porcelain enamel
	Design maximizes corrosion resistance & life of anode rod
	Patented corrosion-resistant elements include double layer of magnesium oxide and copper to resist corrosion
	Durable factory-installed full flow brass drain valve
	Low lead compliant
Automatic Temperature Control	Automatic Temperature Control - Surface mounted thermostat automatically cycles on and off to maintain desired water temperature
	170°F Maximum temperature setting
Warranty	3-year limited tank, upgradable to 5-years and a 1-year limited parts warranty*

*See Commercial Warranty Certificate for complete information.

All models come with a terminal block. Models with power requirements over 48 Amps come with a fused terminal block. See Electrical Characteristics Chart on Back.



Available in
**Fused and
Non-Fused
Configurations**

Ruud Light-Duty
66 to 119.9-Gallon Capacities
208/240/277/480 Voltages
12.1 kW
Electric



Consult factory for certification listing.


Safety and Construction | These products are design certified by Underwriters Laboratories (UL) to meet UL safety standards as electric storage tank water heaters. All models are North Carolina and Massachusetts Code compliant.
Certified for 150 PSI maximum working pressure.

See specifications chart on back.

Light Duty Electric with TB Commercial Water Heaters

DIMENSIONAL INFORMATION (All dimensions shown in English and Metric)													STANDBY LOSS
MODEL NUMBER	MIN. WATTS	MAX. WATTS	TANK CAPACITY (LISTED)		TANK CAPACITY (MEASURED)		A		B		APPROX. SHIPPING WT.		
			GAL.	LTR	GAL.	LTR	INCHES	MM	INCHES	MM	lbs.	kgs.	
ELD66-(F)TB	12,100	12,100	65	246	58.5	221	59-3/8	1508	22-1/4	565	185	84	0.76
ELD80-(F)TB	12,100	12,100	80	303	72	273	59-5/8	1514	23-3/4	603	220	100	0.68
ELD120-(F)TB	12,100	12,100	119.9	454	108	409	62-7/8	1597	28-1/4	718	335	152	0.55

- (F): Fused Models
- Fused or Non-Fused, Fused if > 48 Amps, If Fused TB replaced with FTB

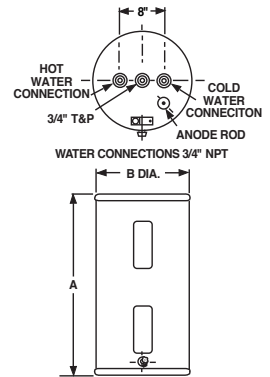

ELECTRICAL CHARACTERISTICS													
ELEMENT WATTAGE	ELEMENT WATTAGE	SIMULTANEOUS WIRING											
		2-WIRE SINGLE PHASE OPERATION FULL LOAD CURRENT IN AMPERES				4-WIRE THREE PHASE OPERATION FULL LOAD CURRENT IN AMPERES				4-WIRE SINGLE PHASE OPERATION FULL LOAD CURRENT IN AMPERES (DOUBLE BRANCH CIRCUIT)			
UPPER	LOWER	TERMINALS L1 AND L2				THERE'S NO 4 WIRE 3 PHASE THIS IS 3 PHASE SIM TERMINALS L1, L2, AND T2				TERMINALS L1 AND L2 FIRST CIRCUIT TERMINALS T1 AND T2 SECOND CIRCUIT			
		208	240	277	480	208	240	480		208	240	277	480
6050	6050	58	50	44	25	58	50	25		58	50	44	25

RECOVERY CAPACITIES (Recovery in U.S. Gallons/Hr. (GPH) and Liters/Hr. (LPH) at various temperature rises)											
ELEMENT WATTAGE UPPER/LOWER	SIMULTANEOUS WIRING										
	40°F / (22°C)		60°F / (33°C)		80°F / (45°C)		100°F / (56°C)		120°F / (67°C)		
	GPH	LPH	GPH	LPH	GPH	LPH	GPH	LPH	GPH	LPH	
6050/6050	122	460	81	307	61	230	49	184	41	153	

Consult factory for certification requirements.

Recommended Specifications (for trade reference only)

Water heater(s) shall be model _____, manufactured by Ruud, having electrical input of _____ kW and a recovery rate of _____ GPH at a 100°F temperature rise. Water heater(s) shall have a storage capacity of _____ gallons. Water heater(s) shall have the UL seal of certification and be factory equipped with an CSA/ ASME rated temperature and pressure relief valve. Tank(s) interior shall be coated with a high temperature porcelain enamel and furnished with

a magnesium anode rod rigidly supported. Water heater(s) shall meet or exceed the energy factor requirements of ASHRAE. Tanks shall have a working pressure rating of 150 psi, and shall be completely assembled. Water heater(s) shall be equipped with copper, resistored, "screw-in" type elements. Tank shall be insulated with 2-1/2" of rigid polyurethane foam insulation. Water heater(s) shall be equipped with surface mounted thermostats each with an integral, manual reset, high limit control. Water heater(s) shall be covered by a three year limited warranty against tank leaks.

In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.

Ruud Water Heating • 1115 Northmeadow Parkway, Suite 100, Roswell, Georgia 30076 • www.ruud.com