



The new degree of comfort.®



Water

Electric  
Marathon Point-of-Use  
Water Heaters

## Marathon® Point-of-Use non-metallic electric water heaters are durable, lightweight, easy to install and offer a longer warranty

### Non-metallic Tank Features

- Seamless, blow-molded, polybutene tank – impervious to rust and corrosion
- Multiple layers of filament wound fiberglass give the tank unmatched strength
- Polyurethane insulation helps reduce energy consumption and standby heat loss
- Recessed drain valve is out of the way of brooms and scrubbers
- Durable PEX dip tube
- Tough molded polyethylene outer shell resists dents, scratches, and salt air
- Tough molded polyethylene outer shell resists dents, scratches, and salt air

### Easy Installation & Service

- Marathon point-of-use's lightweight tank is easy to maneuver and position
- Bowl shaped tank bottom allows complete sediment draining
- Water tight grommets keep out over-head moisture and condensation

### Element Wattage and Voltage

- 15 and 20-Gallon with a 2,000 watt element and 120-voltage; 20-gallon with a 3,000 watt element and 240-voltage

### Plus...

- Thermally fused element to protect against dry-firing
- Brass drain valve
- Temperature and pressure relief valve
- Low Lead compliant
- Standard replacement parts

### Warranty

- Lifetime limited warranty on tank and 6-years on parts\*


\*Warranty is provided to original customer in a residential application after online product registration is complete. Registration must be completed within 90 days of installation. See Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



### Marathon Point-of-Use

15 and 19.9-Gallon Capacities  
Electric

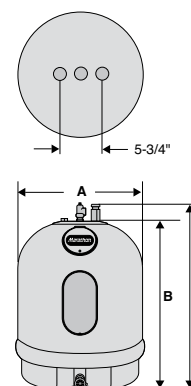

GALLON CAPACITY	MODEL NUMBER	FEATURES		ROUGHING IN DIMENSIONS (SHOWN IN INCHES)			
		ELEMENT WATTAGE	VOLTAGE	TANK DIAMETER A	TANK HEIGHT B	HEIGHT TO WATER CONN. C	APPROX. SHIP WT. (LBS.)
15	MR15120	2000	120	21-3/4	31-3/4	35-3/4	58
19.9	MR20120	2000	120	23-1/2	30-1/2	34-1/2	61
19.9	MR20230	3000	240	23-1/2	30-1/2	34-1/2	61

Canadian models have different model numbers than U.S. models. Add a "C" before the model number (e.g., CMR20230) when ordering.

*In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.*

Rheem Water Heating • 1115 Northmeadow Parkway, Suite 100  
Roswell, Georgia 30076 • [www.rheem.com](http://www.rheem.com)

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1  
Brampton, Ontario L6Y 0P5 • [www.rheem.ca](http://www.rheem.ca)



INTEGRATED HOME COMFORT