



Professional Achiever™ Point-of-Use electric water heaters feature a space-saving design for installation in limited spaces

Efficiency

- Standby Watts Loss 53 (PROE30)
- Single resistored stainless steel heating element to prolong anode rod and tank life

Features

- High efficiency heating element
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature
- Wall bracket for easy wall mount installations and corrosion resistant 1/4 turn drain valve included with 2.5-gallon model



Plus...

- Temperature and pressure relief valve
- Exclusive Ruudglas® tank lining resists corrosion and prolongs tank life
- 2.5 gallon model furnished with a 36 inch power cord.
- Enhanced-flow brass drain valve on 2.5-gallon model
- Low lead compliant

Warranty

- 6-Year limited tank and parts warranty.*

*See Residential Warranty Certificate for complete information

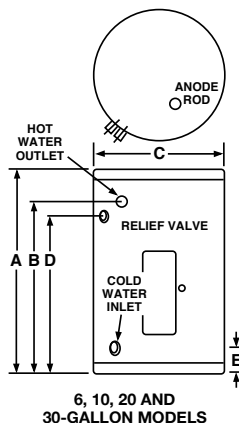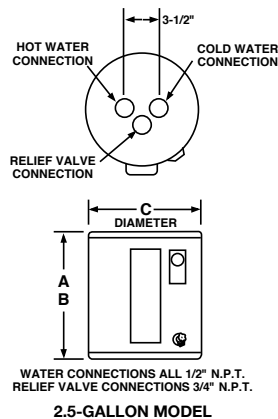

2.5-Gallon



6, 10, 20 and 30-Gallon

Professional Achiever™
Point-of-Use
 2.5, 6, 10, 20 and 30-Gallon Capacities
 120 Volt AC
 2-Wire Single Phase Electric



MODEL NUMBER	DESCRIPTION			ROUGHING IN DIMENSIONS (SHOWN IN INCHES)						APPROX. SHIP WT.		STANDBY WATTS LOSS
	U.S. GAL.	TANK CAPACITY IMP. GAL.	LITRES	HEIGHT A	HEIGHT TO HOT WATER OUTLET B	DIAMETER C	HT. TO SIDE T&P VALVE D	HT. TO COLD WATER INLET E	(LBS.)	KG		
PROE2 1 CD POU	2.5	2	9	14	14	9-3/4	-	-	22	10	N/A	
PROE6 1 CD POU	6	5	23	15-1/4	12-1/2	15-3/4	11-1/2	4-1/4	36	16	N/A	
PROE10 1 CD POU	10	8.5	39	23	20-1/2	15-3/4	19-1/2	4-1/4	46	21	N/A	
PROE20 1 CD POU	20	17	77	25-1/4	22-3/4	19-3/4	21-3/4	5	69	31	N/A	
PROE30 1 CD53 POU	30	23	105	30	23	21-3/4	23	2-3/4	91	41	53	

- **2.5 gallon model:** 1/2" N.P.T. inlet and outlet. Relief valve connection 3/4". Available with 120 AC single phase only, 120v (1440w). Power cord supplied.
- **6 through 30 gallon models:** 3/4" N.P.T. outlet, inlet, anode rod. T & P valve connections. Not available with 3 phase wiring. Water heaters furnished standard with 120 volt AC, 1500 watt single element. Also available in 240 volt AC, 3000 watt single element. Special wiring options – a limited number of wiring options are available. Consult factory for price and availability.

CONSTRUCTION DETAILS: The cold water enters the tank a few inches from the bottom. Both hot and cold water lines may be connected directly to the water heater without special nipples or tees. The relief valve simply screws into the opening provided.

In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.