

# ProSeries™

For Single Point-of-Use or Multiple Applications

## Specifications

Tankless Electric Water Heater

### Applications

- Handwashing 0.3-2.2 GPM
- Standard Hand Sink 0.5 GPM
- Kitchen Sink 2-2.5 GPM
- Mop Sink 2-4+ GPM
- Dishwasher 1-2 GPM

### Features

- Instant, consistent, and endless hot water
- Protected internal temperature control
- Copper immersion heating elements with brass top increases durability and are threaded for easy replacement
- Simple Installation
- Internal temperature control adjustable in increments of 1°F
- 8-13kW units: Temperature range 80°-140°F
- 18-36kW units: Temperature range 80°-180°F

### Special Design Service

Inquiries for units for unique applications are welcome. Call our Technical Service department at **1 800 543 6163**.

### Suggested Specification

Tankless water heater shall be an Eemax ProSeries model number PR\_\_\_\_\_.

Unit shall have copper clad immersion heating element(s) with brass terminations for increased durability. Temperature control and display to be internal to the unit, and adjustable in 1°F increments with a range of 80°-140°F; 80°-180°F on 18-36kW units. Display shall be capable of displaying setpoint temperature in Celsius or Fahrenheit temperature scales. Unit shall utilize a flow meter with a 0.3 GPM activation point and manage power based on actual flow rate and inlet temperature. Values should be processed 60 times per second. Unit shall be WQA certified lead free, certified to UL499 and CSA-C22.2 No. 64.

### Eemax Inline Flow Regulator

EEMAX PART NUMBER	GPM RATING OF INSERTS PROVIDED	CONNECTION SIZE
<b>IFR 1-2</b>	1.0, 1.5, 2.0	1/2" NPT
<b>IFR 3-4</b>	2.0, 3.0, 4.0, 5.0	3/4" NPT
<b>EX0061-2.5-IFR</b>	2.5	3/4" NPT

- Enhanced outlet temperature control
- Install on the outlet side of the heater
- Limit maximum volume to the specified flow rate to ensure exiting temperature is within an acceptable range
- Flow Regulators for 1/2" and 3/4" plumbing connections
- Restriction range: 1.0 to 5.0 gallons per minute



PR008240/PR011240/PR13240

PR018240



PR024240/PR027240

PR036240



**NO LEAD**  
\*The wetted surface of this product contacted by water contains less than 0.25% lead and meets NSF/ANSI 372.



### Eemax Inline Flow Regulator Suggested Sizing Guide\*

		Inlet Water Temperature			
		40°	50°	60°	70°
<b>PR008240</b>	IFR 1-2	1.0	1.0	1.0	1.5
<b>PR011240</b>	IFR 1-2	1.0	1.0	1.5	2.0
<b>PR013240</b>	IFR 1-2	1.0	1.5	2.0	2.0
<b>PR018240</b>	IFR 3-4	2.0	2.0	2.0	3.0
<b>PR024240</b>	IFR 3-4	2.0	2.0	3.0	4.0
<b>PR027240</b>	IFR 3-4	2.0	3.0	4.0	5.0
<b>PR036240</b>	IFR 3-4	3.0	4.0	5.0	5.0

\*Selection based on inlet temperature and an outlet temperature setting of 105°F



# ProSeries

For Single Point-of-Use or Multiple Applications

## Specifications

Tankless Electric Water Heater

### TEMPERATURE RISE °F

MODEL NUMBER	KW	TOTAL AMP DRAW	CIRCUITS REQUIRED X BREAKER SIZE	TURN ON (GPM)	RECOMMENDED WIRE SIZE (75° C/CU)	MAX FLOW GPM	0.5 GPM	1.0 GPM	1.5 GPM	2.0 GPM	2.5 GPM	3.0 GPM	4.0 GPM	5.0 GPM	6.0 GPM
<b>Volts 240 or 208 single phase only††</b>															
C <b>PR008240</b>	8.0	33	(1x40)	0.3	8 AWG	4.8	109°	55°	36°	27°	22°	18°	14°	11°	-
C <b>PR008240</b> (derated 208V performance)	5.8	28	(1x30)	0.3	10 AWG	4.8	79°	40°	26°	20°	16°	13°	10°	8°	-
C <b>PR011240</b>	11.0	46	(1x50)	0.3	8 AWG	4.8	†	75°	50°	38°	30°	25°	19°	15°	-
C <b>PR011240</b> (derated 208V performance)	8.2	40	(1x40)	0.3	8 AWG	4.8	†	56°	37°	28°	22°	19°	14°	11°	-
C <b>PR013240</b>	13.0	54	(1x60)	0.3	8 AWG	4.8	†	89°	59°	44°	36°	30°	22°	18°	15°
C <b>PR013240</b> (derated 208V performance)	10.1	49	(1x50)	0.3	8 AWG	4.8	†	69°	46°	34°	28°	23°	17°	14°	11°
C <b>PR018240</b>	18.0	75	(2x40)	0.3	8 AWG	7.0	†	123°	82°	61°	49°	41°	31°	25°	20°
C <b>PR018240</b> (derated 208V performance)	13.3	64	(2x40)	0.3	8 AWG	7.0	†	91°	61°	45°	36°	30°	23°	18°	15°
C <b>PR024240</b>	24.0	100	(3x40)	0.3	8 AWG	7.0	†	†	109°	82°	66°	55°	41°	33°	27°
C <b>PR024240</b> (derated 208V performance)	17.5	84	(3x30)	0.3	10 AWG	7.0	†	120°	80°	60°	48°	40°	30°	24°	20°
C <b>PR027240</b>	27.0	113	(3x40)	0.3	8 AWG	7.0	†	†	123°	92°	74°	61°	46°	37°	31°
C <b>PR027240</b> (derated 208V performance)	20.0	96	(3x40)	0.3	8 AWG	7.0	†	137°	91°	68°	55°	46°	34°	27°	23°
C <b>PR036240</b>	36.0	150	(4x40)	0.3	8 AWG	8.0	†	†	†	123°	98°	82°	61°	49°	41°
C <b>PR036240</b> (derated 208V performance)	26.6	127	(4x40)	0.3	8 AWG	8.0	†	†	121°	91°	73°	61°	45°	36°	30°

\* 240V units can be used on 208V single phase with 25% reduced temperature output. Please note per UL standards the rating plate and installation instructions will all be according to a 240V applied voltage. Check with local officials prior to derating the electrical infrastructure.

† Temperature electronically limited setting on adjustable thermostat on front cover

“C” indicates evaluation and compliance to either Underwriters Laboratories (UL) or Intertek (ETL) under CAN/CSA-C22.2 No. 64/No. 88.

†† ATTENTION: Under no circumstances can ProSeries be connected to a 208 V or 240 V three phase load center. Connection to any three phase load center will void all warranty coverage

## Product Specifications


**Dynamic Operating Pressure:** 25 PSI min., 150 PSI max.

**Certifications:** ETL Listed to UL499 and CSA-C22.2 No. 64

**Temperature Accuracy:** +/-1° at steady state


### PR008240/PR011240/PR013240

<b>Size:</b>	11.5”H 8”W x 3.75”D
<b>Weight:</b>	8 kw: 4.75 lb, 11 kw/13 kw: 7 lb
<b>Unique Features:</b>	Welded exchanger, 1/2” compression fittings with 1/2” NPT adapters included
<b>Adj. Temp. Range:</b>	80°F-140°F

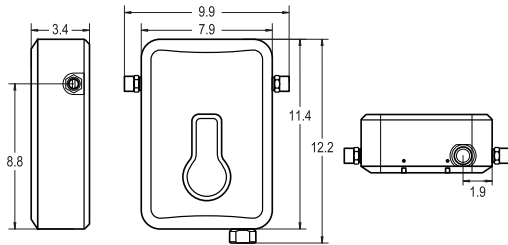


### PR018240

<b>Size:</b>	17”H x 14”W x 3.75”D
<b>Weight:</b>	11.25 lb
<b>Unique Features:</b>	Brazed exchanger, 3/4” NPT fittings
<b>Adj. Temp. Range:</b>	80°F-180°F

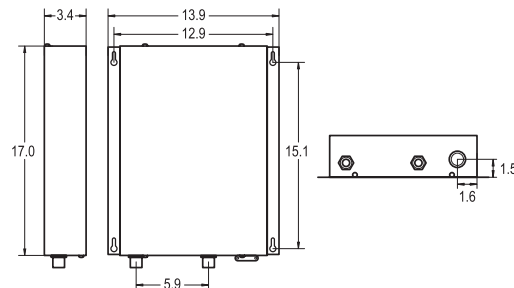

### PR024240/PR027240

<b>Size:</b>	17”H x 17”W x 3.75”D
<b>Weight:</b>	13.75 lb
<b>Unique Features:</b>	Brazed exchanger, 3/4” NPT fittings
<b>Adj. Temp. Range:</b>	80°F-180°F

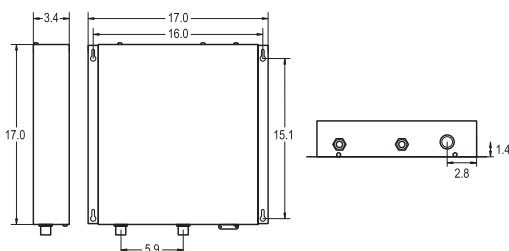

### PR036240

<b>Size:</b>	17”H x 21”W x 3.75”D
<b>Weight:</b>	17.4 lb
<b>Unique Features:</b>	Brazed exchanger, 3/4” NPT fittings
<b>Adj. Temp. Range:</b>	80°F-180°F

