

	Single-Stage Cooling	Two-Stage Cooling	2018 DOE Efficiency Standards Compliant	2023 DOE Efficiency Standards Compliant	VFD Technology
Commercial Prestige® Series (RHPDZT)		Х	Х	Х	х
Commercial Classic Plus® Series (RHPDZS)		Х	Х		X (Optional)
Commercial Classic® Series (RHPDZR)	Х		X		Not Available

## RHPD STANDARD FEATURES INCLUDE:

- Factory charged with R-410A HFC refrigerant
- Wired and run tested
- Scroll compressors with internal line break overload and high pressure protection
- Model RHPDZR has a single-stage compressor
- Models RHPDZS and RHPDZT have two-stage compressor
- Convertible airflow vertical down flow or horizontal side flow
- · Forkable base rails for easy handling and lifting
- Cooling operation up to 125°F ambient
- MicroChannel evaporator and condenser coil
- PlusOne® ServiceSmart package includes: Qwik-Change Flex-Fit Rack Qwik-Slide Blower Assembly Qwik-Clean Drain Pan
- Overflow condensate sensor
- PlusOne® Diagnostics with Dual 7-Segment LED Display to meet code compliance
- One-piece top cover and base pan with drawn supply and return opening

- Two-piece control door
- 1/4 turn fasteners on filter access door
- · Color-coded and labeled wiring
- External lockable gauge ports
- TXV refrigerant metering system
- Solid-core liquid line filter drier
- High pressure and low pressure/loss of charge protection with built in Smart Logic
- Insulation encapsulated throughout entire unit
- High performance belt drive motor with variable pitch pulleys and quick adjust belt system
- Variable Frequency Drive (VFD) blower is standard on Model RHPDZT and optional on model RHPDZS
- New product footprint with matching connections
- Improved factory lead times



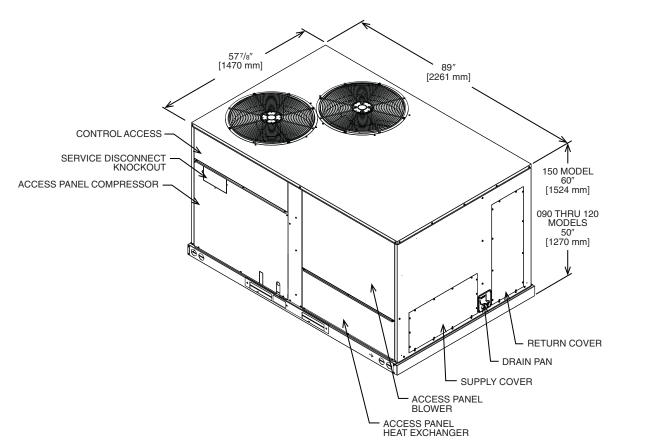



Illustration ST-A1273-26-00

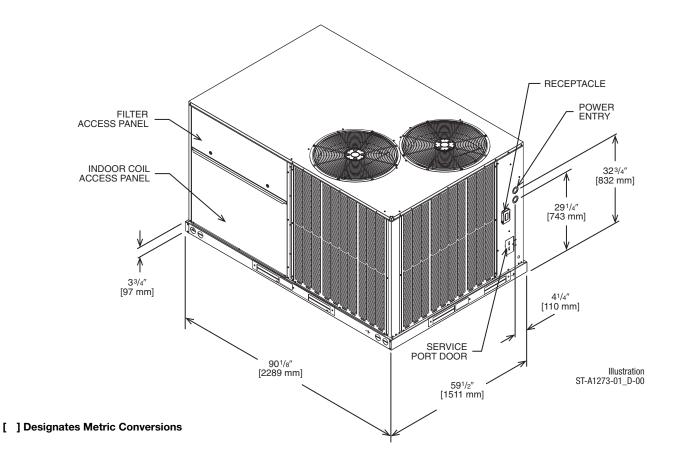

## SUPPLY AND RETURN DIMENSIONS FOR HORIZONTAL APPLICATIONS

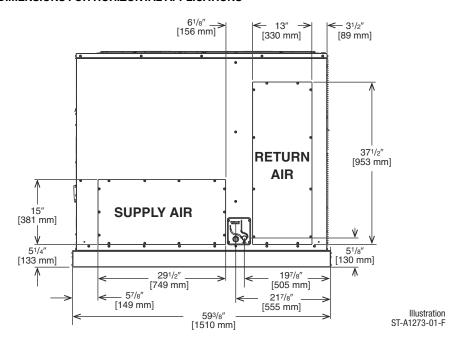

## SUPPLY AND RETURN DIMENSIONS FOR DOWNFLOW APPLICATIONS

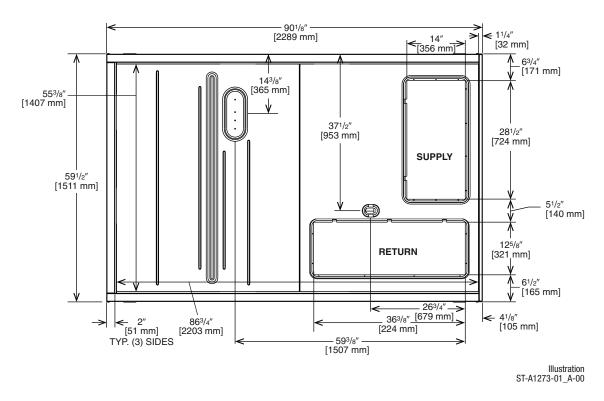

[ ] Designates Metric Conversions