

491 / 492 Series



Made In Australia



5 Years Warranty



Easy Maintenance



IPX4



Big Power





Truly Outdoor



Fitur

- Retrofit mudah
- Fitting saluran masuk dan keluar
- Rheem Ultraname[®] exclusive
- Anoda yang lebih tebal
- Model elemen kembar - 492250,492315,492400

Item				
Rheem 491 Series Single Element		491250	491315	491400
Rheem 492 Series Twin Element		492250	492315	492400
Hot Water Delivery		250	315	400
Initial Storage Capacity		270	324	412
Boost Capacity (Twin Element)		50	50	90
Height	A (mm)	1395	1640	1840
	B (mm)	640	640	690
	C (mm)	680	680	735
	D (mm)	1117	1317	1479
	E (mm)	73	113	121
	F (mm)	103	103	105
	G (mm)	988	1228	1323
	H (degrees)	32°	32°	30°
J (degrees)		88°	88°	83°
Approx. Weight Empty	kg	76	97	118
Relief Valve Setting	kPa	1000		
Expansion Control Valve Setting	kPa	850		
Max. Supply Pressure				
* with expansion control valve	kPa	680		
* without expansion control valve	kPa	800		
Water Connections				
Suitable For. No. People				
Continuous Tariff		3-5	4-6	5-9
Off Peak Tariff	Single Element	1-3	2-4	4-6
	with 24 hour booster	2-3	3-4	4-7

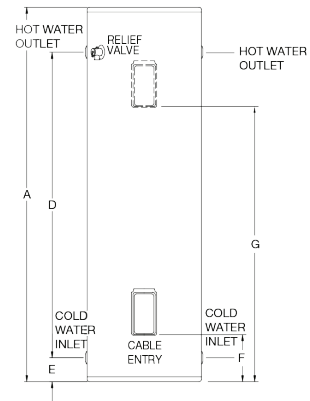

Note : 160L - 400L models feature a single T&PR valve, located on the left side