



Packaged Gas Electric
RGED Series



Commercial Renaissance™ Line Achiever® Series Packaged Gas Electric Units



RGED Series

Cooling Efficiencies up to: 11 EER & 14.6 IEER

Nominal Sizes: 7.5, 8.5, 10 & 12.5 Tons [26.4, 29.9, 35.2 & 44.0 kW]

Cooling Capacities: 88k Btu/h [25.78 kW] to 148k Btu/h [43.36 kW]

Refrigerant Type: R-454B

ASHRAE 90.1 2022 Compliant Models



RELY ON RUUD.™

FORM NO. R22-881 REV. 1



TABLE OF CONTENTS

Unit Features & Benefits	3-12
Model Number Identification	13
Options	14
Selection Procedure	15
General Data	16
General Data Notes	17
Heating Performance Data	18
Gross Systems Performance Data	19-22
HumidiDry® Gross Systems Performance Data	23-26
Airflow Performance Data	27-42
Electrical Data	43-46
A2L Refrigerant Installation Safety Data	47
Dimensional Data	48-50
Field-Installed Accessories	51-79
Guide Specifications	80-87
Limited Warranty	88



RGEDYB STANDARD FEATURES INCLUDE:

- Factory charged with R-454B refrigerant
- Wired and run tested
- Scroll compressors with internal line break overload and high pressure protection
- Models have two stages of cooling
- Convertible airflow – vertical down flow or horizontal side flow
- Forkable base rails for easy handling and lifting
- Cooling operation up to 125°F ambient
- Two-stage gas heat input with direct spark ignition system, solid state furnace controls, and optimized induced draft combustion
- MicroChannel evaporator and condenser coil
- PlusOne® ServiceSmart package includes:
 - Qwik-Change Flex-Fit Rack
 - Qwik-Slide Blower Assembly
 - Qwik-Clean Drain Pan
- Overflow condensate sensor
- PlusOne® Diagnostics with Dual 7-Segment LED Display to meet code compliance
- One-piece top cover and base pan with drawn supply and return opening
- Two-piece control door
- ¼ turn fasteners on filter access door
- Color-coded and labeled wiring
- External lockable gauge ports
- TXV refrigerant metering system
- Solid-core liquid line filter drier
- High pressure and low pressure/loss of charge protection with built-in Smart Logic
- Insulation encapsulated throughout entire unit
- High performance belt drive motor with variable pitch pulleys and quick adjust belt system
- Blower with Variable Frequency Drive (VFD) control is standard
- MERV 8 & MERV 13 filters are available as field installed option
- Industry standard footprint and matching connections
- Refrigerant leak detection system



Designing for Sustainability with Low GWP: For 2025, the Environmental Protection Agency (EPA) has set a global warming potential (GWP) limit of 700 for refrigerant used in heating and cooling systems. This new requirement will result in a 78%¹ lower GWP than previous-generation refrigerants — with only minimal changes to system installation. For us, this is another step toward our continued sustainability goal of reducing greenhouse gas emissions, while still delivering an exceptional level of energy efficient, dependable comfort.

¹When comparing the GWP of R-454B to R-410A refrigerant.

FACTORY INSTALLED OPTIONS:

- Louvered panels
- Hinged access doors
- Stainless steel heat exchanger (20 year warranty)
- PlusOne® HumidiDry Dehumidification System
- Low ambient/freeze stat
- Non-powered convenience outlet
- Unfused disconnect
- Vertical Economizer (Title 24 and ASHRAE 90.1 2022 compliant)
- Supply and return smoke detector
- ElectroFin® E-Coat for MicroChannel Condenser Coil Coating
- ClearControl™ Direct Digital Control (DDC)
- Comfort Alert® Phase-monitor Protection

FIELD INSTALLED ACCESSORY EQUIPMENT:

Accessory	Model Number	Factory Installation Available?
Economizers		
DDC Economizer with Single Enthalpy (Downflow) <i>MicroMetl Economizer with Honeywell Controller</i>	RXRD-01MDDBM3	Yes
DDC Economizer with Single Enthalpy (Horizontal) <i>MicroMetl Economizer with Honeywell Controller</i>	RXRD-01MDHBM3	No
Non-DDC Economizer with No Controls (Downflow) <i>MicroMetl Economizer, Belimo Actuator</i>	RXRD-31MDDAM3	No
Non-DDC Economizer with Single Enthalpy (Downflow) <i>MicroMetl Economizer with Siemens Controls</i>	RXRD-11MDDAM3	Yes
Non-DDC Economizer with Single Enthalpy (Downflow) <i>Ruskin Rooftop Systems Economizer with RRS Basic Controller</i>	RXRD-41MDDAM3	Yes
Non-DDC Economizer with Single Enthalpy (Downflow) <i>Ruskin Rooftop Systems Economizer with Siemens Controller</i>	RXRD-51MDDAM3	Yes
Non-DDC Economizer with Single Enthalpy (Horizontal) <i>MicroMetl Economizer with Siemens Controls</i>	RXRD-11MDHAM3	No
Non-DDC Economizer with Single Enthalpy (Horizontal) <i>Ruskin Rooftop Systems Economizer with RRS Basic Controller</i>	RXRD-41MDHAM3	No
Non-DDC Economizer with Single Enthalpy (Horizontal) <i>Ruskin Rooftop Systems Economizer with SiemensController</i>	RXRD-51MDHAM3	No
Economizer Universal DDC Interface Kit	RXXR-DDC01	Yes

FIELD INSTALLED ACCESSORIES:


Accessory	Model Number	Factory Installation Available?
Comfort Alert ¹ (3 Phase) DDC	RXXR-AZ01	Yes
Comfort Alert ¹ (3 Phase) Non-DDC	RXXR-AZ02	Yes
Communication Card, BACnet	RXXR-AY01	No
Communication Card, LonWorks	RXXR-AY02	No
Concentric Adapter 7.5/8.5 Ton Drop	RXMC-DD01	No
Concentric Adapter 10 Ton Drop	RXMC-DD02	No
Concentric Adapter 12.5 Ton Drop	RXMC-DD03	No
Concentric Diffuser 7.5/8.5 Ton Drop	RXRN-AED2000	No
Concentric Diffuser 10.0 Ton Drop	RXRN-AED3415	No
Concentric Diffuser 12.5 Ton Drop	RXRN-AED3618	No
Concentric Diffuser 7.5/8.5 Ton Flush	RXRN-AEF2000	No
Concentric Diffuser 10.0 Ton Flush	RXRN-AEF3415	No
Concentric Diffuser 12.5 Ton Flush	RXRN-AEF3618	No
Convenience Outlet, Unwired	RXXR-BN01	Yes
Dual Enthalpy Kit (for Honeywell JADE™)	RXXR-BV01	No
Dual Enthalpy Kit DDC (for Honeywell DDC)	RXXR-BV02	No
Dual Enthalpy, Temperature and Humidity Sensor (for Ruskin Basic Controller)	PD955977	No
Dual Enthalpy, Temperature and Humidity Sensor (for Siemens)	PD555460	No
Flue Diverter	RXXR-DFG04	No
Freeze Stat Kit	RXXR-AM01	Yes
Fresh Air Damper, Manual	RXRF-ADA1	No
Fresh Air Damper, Motorized	RXRF-ADB1	No
Fresh Air Damper, Motorized (DDC)	RXRF-ADC1	No
Low-Ambient Control Kit	RXRZ-A04	Yes
LP Kit ²	RXGJ-FP39	No
MERV 8 Filter 7.5 & 8.5 Ton	RXMF-M08A22020	No
MERV 8 Filter 10 & 12.5 Ton	RXMF-M08A22520	No
MERV 13 Filter 7.5 & 8.5 Ton	RXMF-M13A22020	No

¹One (1) Comfort Alert required per compressor.

²Refer to conversion kit index provided with the LP conversion kit for burner orifice sizing

³Compatible with roofcurbs RXKG-CAE14 or RXKG-CAE24

Accessory	Model Number	Factory Installation Available?
MERV 13 Filter 10 & 12.5 Ton	RXMF-M13A22520	No
Outdoor Coil Louver Kit - 7.5 & 8.5 Ton	RXXR-ADD04A	Yes
Outdoor Coil Louver Kit - 10 & 12.5 Ton	RXXR-ADD04B	Yes
Power Exhaust (230V) Kit, Convertible MicroMetl	RXXR-CDF01C	No
Power Exhaust (460V) Kit, Convertible MicroMetl	RXXR-CDF01D	No
Power Exhaust (230V) Kit for Downflow Economizer (RRS)	RXXR-RDF01C	No
Power Exhaust (460V) Kit for Downflow Economizer (RRS)	RXXR-RDF01D	No
Power Exhaust (575V) Kit for Downflow Economizer (RRS)	RXXR-RDF01Y	No
Power Exhaust (230V) Kit for Horizontal Economizer (RRS)	RXXR-RDF03C	No
Power Exhaust (460V) Kit for Horizontal Economizer (RRS)	RXXR-RDF03D	No
Power Exhaust (575V) Kit for Horizontal Economizer (RRS)	RXXR-RDF03Y	No
Roofcurb Adapter ³	RXXR-DDCAE	No
Roofcurb, 14"	RXKG-DDD14	No
Roofcurb, 14" Welded	RXKG-SD14	No
Roofcurb, 24"	RXKG-DDD24	No
Roofcurb, 24" Welded	RXKG-SD24	No
Sensor, Carbon Dioxide (Wall Mount)	RXXR-AR02	No
Sensor, Room Humidity	RHC-ZNS4	No
Sensor, Room Temperature and Relative Humidity	RHC-ZNS5	No
Smoke Detector Kit, Return	RXXR-BS03	No
Smoke Detector Kit, Return/Supply	RXXR-BS04	No
Unfused Service Disconnect	RXXR-BP01	Yes

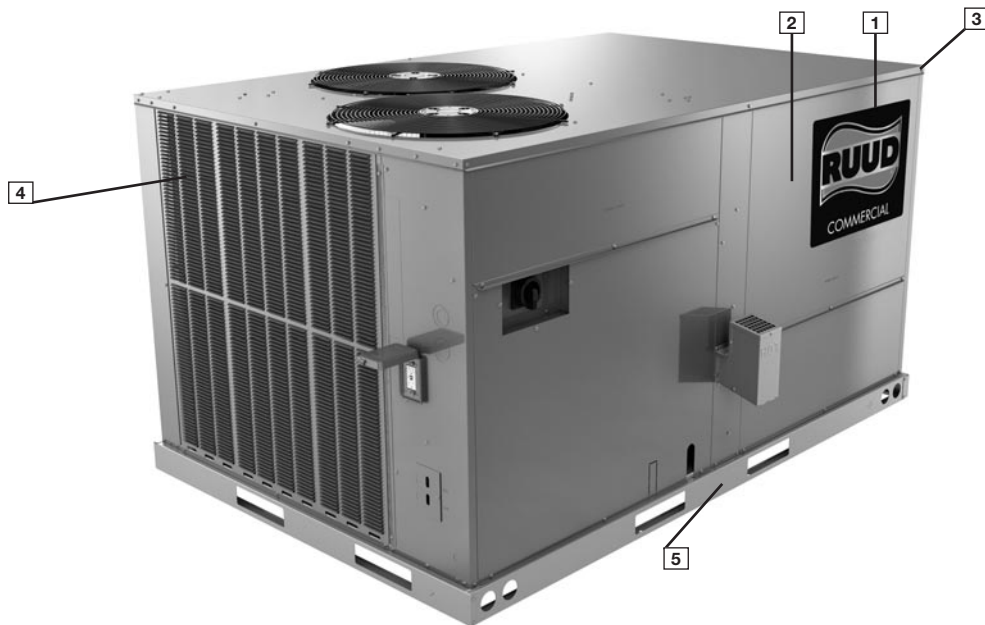

Cabinet and Foundation

Outwardly, the large *Ruud*® Renaissance label (1) identifies the brand to the customer. The sheet-metal cabinet (2) uses 18-gauge material for structural components with an underlying coat of G90. To ensure the leak-proof integrity of these units, the design utilizes a one-piece top with a 1/8" drip lip (3) as well as gasket-protected panels and screws. The Ruud hail guard (optional) (4) sets the standard for coil protection in the industry. Electro deposition, baked-on enamel that is tested to withstand a rigorous 1000-hour salt spray test, per ASTM B117.


Anything built to last must start with the right foundation. Following that model, the foundation is comprised of 14-gauge, commercial-grade, full perimeter base rails (5) that integrate fork slots and rigging holes to save set-up time on the job site.

Easy Installation

The Renaissance line features a footprint that simplifies the replacement process by eliminating the need for a new curb adapter and being able to match inlet, outlet and electrical connections of the most common/industry-standard configurations.


Base Pan

The base pan is stamped to form a 7/8" flange around the supply and return cover, which eliminates the worry of water entering the conditioned space (6). All insulation is secured with both adhesive and mechanical fasteners, and all edges are hidden.

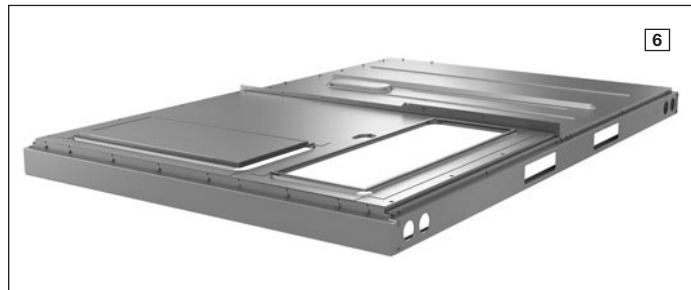

Drain Pan

The Qwik-Clean Drain Pan (7) is made from a composite material that resists the growth of harmful bacteria. With both side and center drain options, the drain pan slides out completely for easy cleaning. It also features a standard overflow switch.

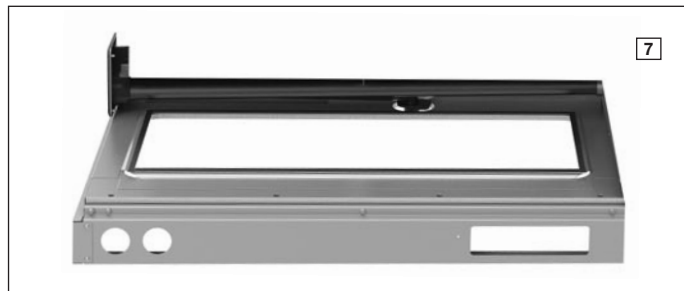

Test Standards


During development, each unit was tested to U.L. 60335-2-40, AHRI 340-360 as well as other Ruud-required reliability tests. Ruud adheres to stringent ISO 9002 quality procedures, and each unit bears the U.L. and AHRI certification labels located on the unit nameplate. Contractors can be assured that when a Ruud packaged unit arrives at the job, it is ready to go with a factory charge and quality checks.

Easy Access

All major compartments are easily accessible from the front of the unit: the electrical compartment, blower compartment, heating section, and outdoor section. Each compartment has mechanical fasteners. Panels are permanently embossed with the compartment name (e.g. control/filter access, blower access, and electric heat access). The filter compartment is accessed through a large, mechanically fastened panel. Information is readily available on the outside of the panel, with a nameplate that contains the model and serial numbers, electrical data, and other important unit information. Hinged access is available as an option for the electrical, blower, and filter compartments.

Charging Charts, Wiring Diagrams, & Labels

The unit charging chart is located on the outside of the compressor access panel. Electrical wiring diagrams are found on the control box cover, which allows contractors to move them to more readable locations. The model and serial numbers are located on the right of the control box. Having this information on the inside means easier model identification for the life of the product. The production line quality test assurance label is also placed in this location (8).



Filter Rack


Located within the filter compartment, the Qwik-Change Flex-Fit Rack (9) allows easy changeover between 2" and 4" standard size and readily available filters.



Blower Assembly


Removing three screws provides full access to the blower compartment. Inside, the Qwik-Slide Blower Assembly (10) is incredibly easy to access and remove. This makes servicing internal components such as blower motor, TXV, and microchannel coil much easier. The entire assembly slides out by removing the 3/8" screws from the blower retention bracket. The adjustable motor pulley (11) can easily be adjusted by loosening the bolts on either side of the motor mount. Removing the bolts allows for easy removal of the blower pulley by pushing the blower assembly up to loosen the belt. Once the pulley is removed, the motor sheave can be adjusted to the desired number of turns, ranging from 0 to 6 turns open.

Where the demands for the job require high static, Ruud offers drives that deliver nominal airflow up to 2" of static. By referring to the airflow performance tables listed in the installation instructions, proper static pressure and CFM requirements can be dialed in. The scroll housing (12) and blower scroll provide quiet and efficient airflow. The blower sheave is secured by an "H" bushing that firmly secures the pulley to the blower shaft, resulting in years of trouble-free operation. The "H" bushing allows for easy removal of the blower pulley from the shaft. This is an improvement from a set screw, which can score the shaft and create burrs that make blower-pulley removal difficult.

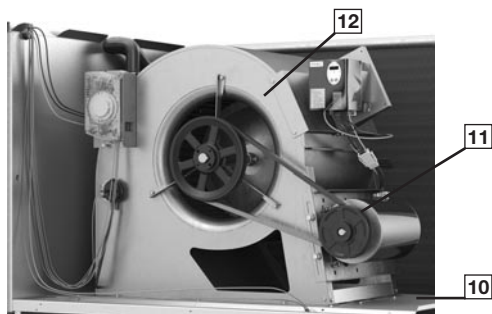


High and Low Pressure Switches & Freeze Stat

High pressure (13) and low pressure (14) switches are standard. They are located in the outdoor section along with the low-ambient control (15). The optional Freeze Stat (16) (standard on models with ClearControl), is clipped onto the suction line in the blower compartment. The low ambient control allows the compressor to operate down to 0 degrees ambient temperature by cycling the outdoor fans on high pressure. The high-pressure switch shuts off the compressors if pressures exceeding 610 PSIG are detected. The low-pressure switch shuts off the compressors if low pressure is detected due to loss of charge. Built-in Smart Logic reduces nuisance calls by only shutting off compressors after the third detection. The freeze stat protects the compressor if the evaporator coil gets too cold (below freezing) due to low airflow.

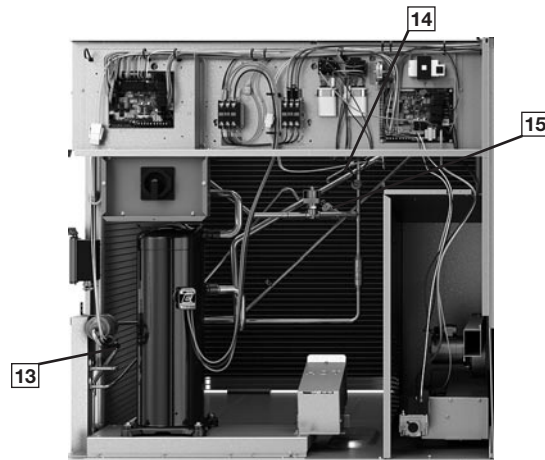


MicroChannel Evaporator & TXV

The MicroChannel Evaporator (17) is accessible through the blower compartment, and through the filter rack, to simplify cleaning. The evaporator uses microchannel technology for maximum heat transfer, light weight, fewer manually brazed connections and reduced refrigerant charge. The TXV metering device maintains superheat over a wide range of varying temperatures optimizing unit performance for all conditions.

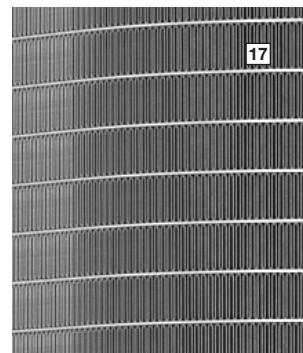


Control Box

Inside the control box (18), each electrical component is clearly labeled; that label matches the component to the wire diagram for ease of trouble shooting. All wiring is numbered on each end of the termination and is color-coded to match the wiring diagram. The integrated furnace control, incorporates the PlusOne® Diagnostics: Dual 7-Segment LED Display (19) with easy-to-understand fault codes. The control transformer has a low voltage circuit breaker that trips if an electrical short occurs. There is a blower contactor and compressor contactor for each compressor.

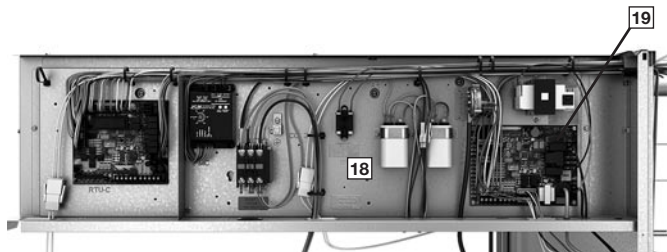

ClearControl

The optional ClearControl system consisting of a rooftop unit controller, temperature sensors, and pressure sensors, allows real-time monitoring and communication between rooftop units. The Rooftop Unit Controller (RTU-C) that is factory mounted and wired into the control panel. The RTU-C is a solid-state, micro-processor-based control board that provides flexible control and extensive diagnostics for all unit functions. The RTU-C, using proportional/integral control algorithms, performs specific unit functions that govern unit operation in response to zone conditions, system temperatures, system pressures, ambient conditions, and electrical inputs. The RTU-C features a 16 x 2 character LCD display and a five-button keypad for local configuration and direct diagnosis of the system (20). Features include a clogged filter switch (CFS), fan proving switch (FPS), return air temperature sensor (RAT), discharge air temperature sensor (DAT), and outdoor air temperature sensor (OAT). Freeze sensors (FS) are used in place of freeze stats to allow measurement of refrigerant suction line temperatures.

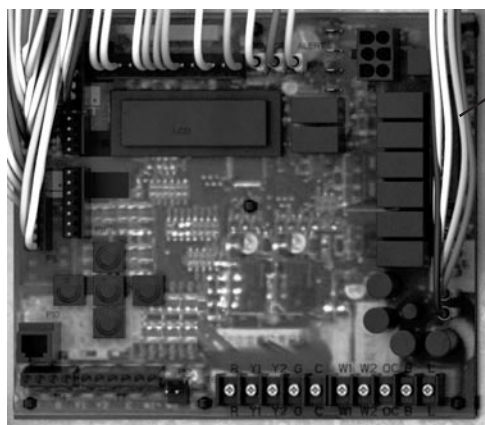


The RGED Gas Electric with the RTU-C is specifically designed to be applied in four distinct applications:

- 1. BACnet Communication** — The RGED is compatible with a third party building management system that supports the BACnet Application Specific Controller device profile, with the use of a field installed BACnet Communication Module. The BACnet Communication Module plugs onto the unit RTU-C controller and allows communication between the RTU-C and the BACnet MSTP network. A zone sensor, a BACnet network zone sensor, a BACnet thermostat, or DDC controller may be used to send the zone temperature or thermostat demands to the RTU-C. The BACnet Communication Module is compatible with MSTP EIA-485 daisy chain networks communicating at 38.4 bps. It is compatible with twisted pair, shielded cables.
- 2. LonWorks Communication** — The RGED is compatible with a third party building management system that supports the LonMark Space Comfort Controller (SCC) functional profile or LonMark Discharge Air Controller (DAC) functional profile. This is accomplished with a field installed LonMark communication module. The LonMark Communication Module plugs onto the RTU-C controller and allows communication between the RTU-C and a LonWorks network. A zone sensor, a LonTalk network zone sensor, or a LonTalk thermostat or DDC controller may be used to send the zone temperature or thermostat demands to the RTU-C. The LonMark Communication Module utilizes an FTT-10A free topology transceiver communicating at 78.8 kbps. It is compatible with Echelon qualified, twisted pair cable, Belden 8471, or NEMA Level 4 cables. The module can communicate up to 1640 feet with no repeater. The LonWorks limit of 64 nodes per segment applies to this device.
- 3. 24V Thermostat Compatibility** — The RGED is compatible with a programmable 24 volt thermostat. Connections are made via conventional thermostat screw terminals. Extensive unit status and diagnostics are displayed on the LCD screen of the RTU-C.
- 4. Zone Sensor Compatibility** — The RGED is compatible with a zone sensor and a mechanical or solid state time clock connected to the RTU-C. Extensive unit status and diagnostics are displayed on the LCD screen of the RTU-C.

Comfort Alert

A factory or field installed Comfort Alert (21) module is available for power phase-monitoring protection and additional compressor diagnostics. The alarms can be displayed on the RTU-C display, through the (BAS) network, or connected to the “L-Terminal” of a thermostat for notification.




Variable Frequency Drive

The supply fan Variable Frequency Drive (VFD) (22) optimizes energy usage year round by providing a lower speed for first stage cooling operation, improving IEER over the conventional constant fan system. Operating in the constant fan mode at the reduced speed can use as little as 1/5 of the energy of a conventional constant fan system. Also, by operating at a lower speed on first stage cooling, up to 126% more moisture is removed, improving comfort during low load operation. The VFD comes standard. The VFD supply fan factory option meets California Title 24 and ASHRAE 90.1-2022 requirements for multi blower speed control. VFD also ramps up to the desired speed, reducing stress on the supply fan components and noise from a sudden inrush of air. Because the airflow is cut in half during first stage cooling and constant fan operation, noise is lower during these modes of operation.




Convenience Outlet & Disconnect

For added convenience in the field, factory-installed options of non-powered convenience outlet (23) and disconnect (24) are available. Low and high voltage can enter from the side or through the base. Low-voltage connections are made through the low-voltage terminal strip. For ease of access, the U.L.-required low voltage barrier can be temporarily removed for low-voltage termination and then reinstalled. The high-voltage connection is terminated at the number 1 compressor contactor. The suggested mounting for the field-installed disconnect or circuit breaker is on the exterior side of the electrical control box.



External Lockable Gauge Ports


To the right left of the compressor compartment are the externally mounted lockable gauge ports. They are permanently identified by embossed lettering that identifies the compressor circuit, high pressure connection, (25) and low pressure connection (26). Because the gauge ports are mounted externally, an accurate diagnostic of system operation can be performed without removing access panels. Brass caps on the Schrader fitting ensure the gauge parts are leak proof.



Furnace & Gas Heat Exchanger

The furnace compartment contains the latest technology on the market. Each furnace is equipped with a two-stage gas valve (27) to provide two stages of gas heat input. The first stage operates at 70% of the second stage (full fire), 81% steady state efficiency is maintained. Stainless steel heat exchangers can be factory installed for those applications that have high fresh-air requirements or in applications with corrosive environments. The direct spark igniter (28) ensures reliable ignition in the most adverse conditions. This is coupled with remote flame sensor (29) so the flame is carried across the entire length of the burner assembly. Gas supply can be routed from the side or up through the base. Each furnace has the following safety devices to ensure consistent and reliable operation after ignition:

- Stainless steel heat exchanger warranty increases from 10 years to 20 years.
- Pressures switches to ensure adequate combustion airflow before ignition.
- Rollout switches to prevent obstruction or cracks in the heat exchanger.
- A limit device to protect the furnace from over-temperature problems.

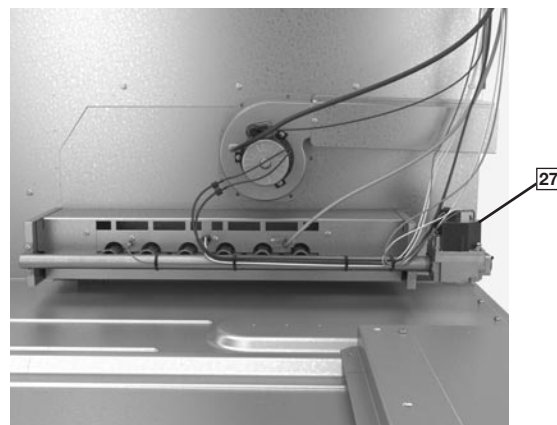

Compressor

The compressor compartment houses the heart-beat of the unit. The scroll compressor (30) is known for its long life and for reliable, quiet, and efficient operation. The suction and discharge lines are designed with shock loops (31) to absorb the strain and stress that the starting torque, steady state operation, and shut-down cycle impose on the refrigerant tubing. Units have two stages of efficient cooling operation. Each unit comes standard with a filter dryer.




Condenser Fans

The condenser fan motors (32) can easily be accessed and maintained through the top of the unit. A down-mount fan provides corrosion protection and easy removal. The polarized plug connection allows the motor to be changed quickly and eliminates the need to snake wires through the unit.



MicroChannel Condenser Technology

The outdoor coil uses the latest MicroChannel technology (33) for the most effective method of heat transfer. The outdoor coil is protected by optional louvered panels, which allow unobstructed airflow while protecting the unit from both the environment and vandalism.

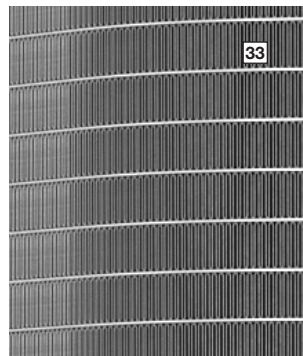


Coil Coating

Every unit offers the option of factory-applied ElectroFin E-Coat condenser coating (34) that delivers superior corrosion resistance for outdoor coils to operate in the harshest of environments.



Economizer and Dampers

Each unit is designed for both down flow or horizontal applications (35) for job configuration flexibility. The return air compartment can also contain an economizer. Each unit is pre-wired for the economizer to allow quick, plug-in installation. Available as a factory-installed option, the economizer provides free cooling when outdoor conditions are suitable and also provides fresh air to meet local requirements. It comes standard with single enthalpy controls, which can be upgraded to dual enthalpy easily in the field. The economizer control has a minimum position set point, an outdoor-air set point, a mixed-air set point, and a CO₂ set point. Barometric relief is standard on all economizers.

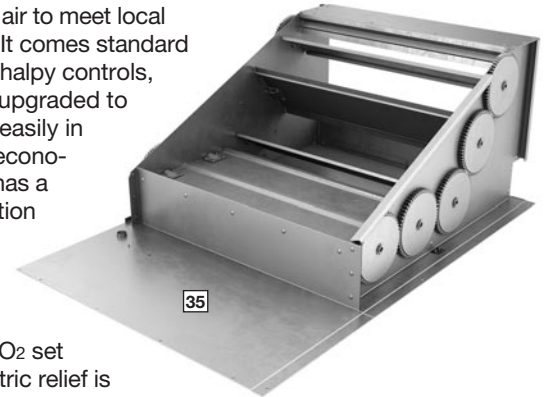

Power Exhaust is easily field-installed. The power exhaust is housed in the barometric relief opening and is easily slipped in with a plugin assembly. The wire harness to the economizer also has accommodations for a smoke detector.

The damper minimum position, actual damper position, power exhaust on/off set point, mixed air temperature limit set point, and Demand Controlled Ventilation (DCV) set point can be read and adjusted at the unit controller display or remotely through a network connection. The Space CO₂ level, mixed air temperature, and Economizer Status (free cooling available, single or dual enthalpy) can be read at the unit controller display or remotely through a network connection. Economizer faults will trigger a network alarm and can be read at the unit controller display or remotely through a network connection.

Roofcurb

The Ruud roofcurb (36) is made for tool-less assembly at the jobsite by engaging tabs in slots of adjacent curb sides, which makes the assembly process quick and easy.



Refrigerant Leak Detection

In the event of a detected refrigerant leak, the refrigerant leak detection sensor will trigger the mitigation procedure that shuts off the compressor(s) and turns on the indoor blower motor.


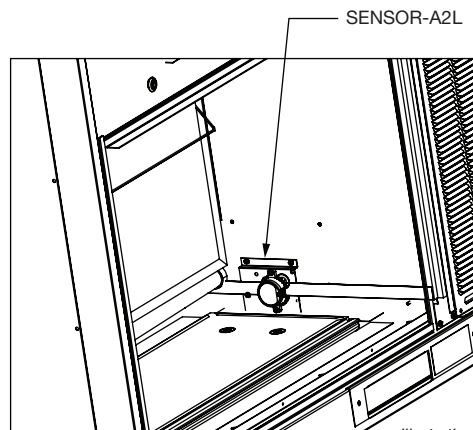


Illustration
 ST-A1365-27-00

If a field-installed vertical economizer will be installed during the unit installation, the A2L leak detection sensor must be relocated as shown below. For More information, refer to the unit installation and Operation Manual.

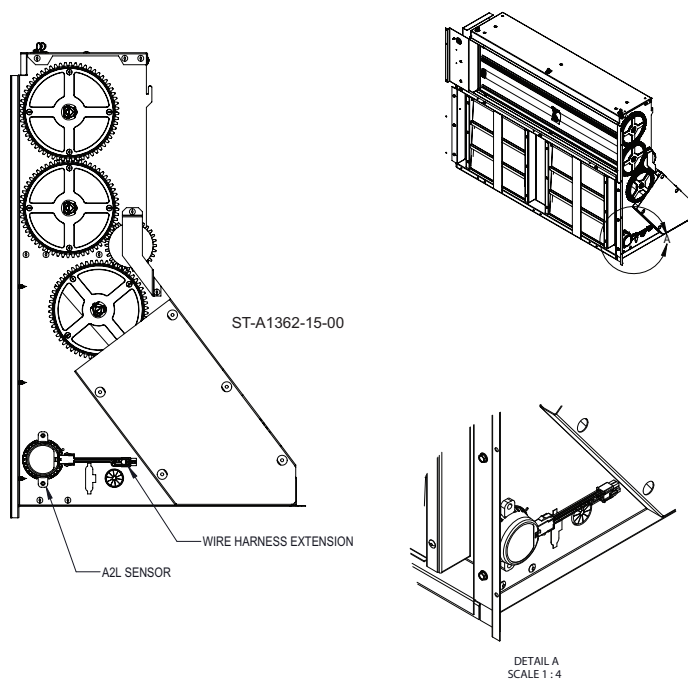

HUMIDIDRY SYSTEM FEATURES

HumidiDry is a Ruud exclusive dehumidification packaged unit solution. It delivers maximum humidity control without compromising desired temperature set point for a high degree of comfort. HumidiDry maintains humidity levels at a desired set point when there's little or no demand for air conditioning. The HumidiDry rooftop unit is controlled by a thermostat and humidistat. The thermostat takes priority on single-stage system. When the thermostat is activated by temperatures that exceed its set point, HumidiDry operates like a standard rooftop unit. It can operate on first stage cooling when demand is low or at full capacity when air conditioning load is high. Unlike other rooftop or reheat units, HumidiDry is uniquely designed so the VFD will operate at a low speed, increasing moisture removal during first-stage cooling operation. This provides initial defense for controlling humidity. When temperature is desirable but humidity exceeds the humidistat set point, the HumidiDry rooftop unit initiates a dehumidification cycle using a combination of hot gas and sub-cooled liquid reheat and the VFD operates at low speed. During this cycle, the HumidiDry rooftop unit delivers dry, neutral air. On a two-stage system, it is possible for both a thermostat and humidistat to register readings above set point. Under this condition, the system runs in the high stage dehumidification cycle, and the VFD operates on high speed. This provides dry conditioned air.

Figure 1 shows the refrigerant path during the normal cooling mode. The liquid refrigerant leaves the TXV with the sudden pressure drop causing the liquid to expand to a vapor and absorbing the heat from the supply air going through the evaporator coil. The refrigerant vapor then travels to the compressor where it is elevated to a higher pressure and temperature. The superheated refrigerant vapor next carries the heat to the outside coil where the heat is then rejected and the refrigerant condenses into a subcooled liquid where the process repeats itself.


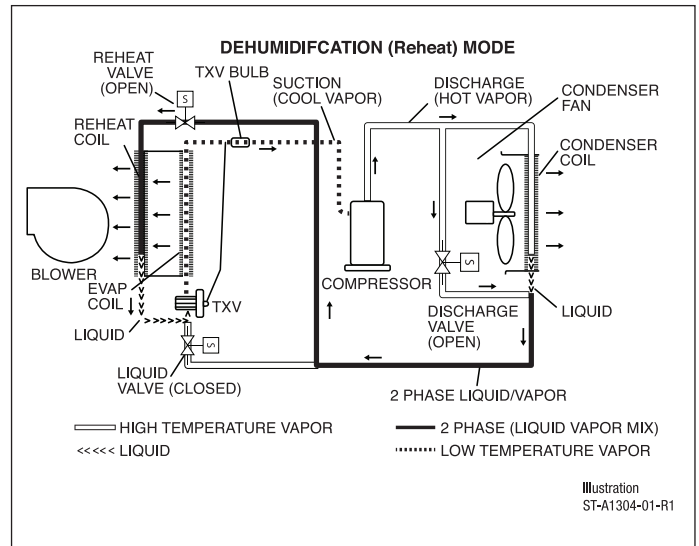


Figure 2 shows the refrigerant path during the reheat mode. When the reheat cycle is energized by the RTU-C, the reheat solenoid valve, upstream of the reheat coil opens. The liquid solenoid valve ahead of the TXV, closes. The discharge solenoid valve, in the compressor discharge line, opens. The liquid refrigerant leaves the TXV with the sudden pressure drop causing the liquid to expand to a vapor and absorbing the heat from the supply air going through the evaporator coil. The refrigerant vapor then travels to the compressor where it is elevated to a higher pressure and temperature. The refrigerant next carries the heat to a parallel path between the outside condenser coil and a bypass circuit. Some of the heat is rejected outdoors. The ratio of heat rejected outdoors versus indoors is controlled by an outdoor fan motor controller (OFMC) that monitors the two-phase temperature and varies the fan speed. This 2-phase refrigerant vapor is then sent to the reheat coil. As the refrigerant travels through the reheat coil it condenses into a subcooled liquid where the process repeats itself.

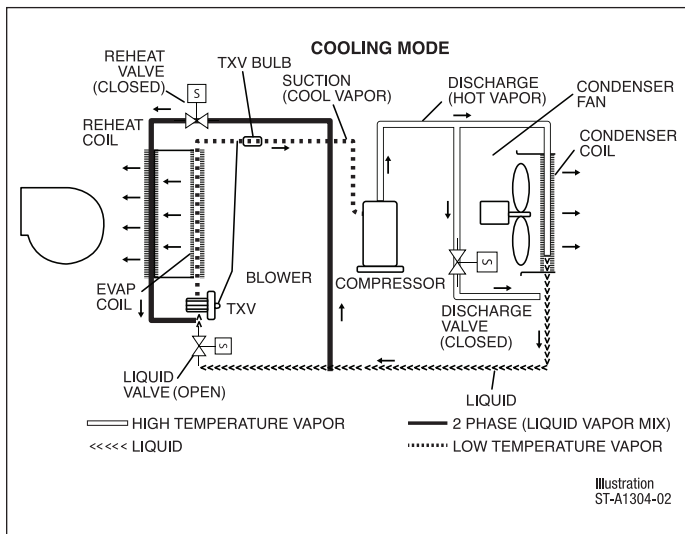

R **GE** **D** **Y** **B** **090** **A** **C** **F** **15** **2** **A** **A** *******
1 **23** **4** **5** **6** **789** **10** **11** **12** **13 14** **15** **16** **17** **18 19 20**

1—Brand

R = Ruud

2, 3—Unit Type

GE = Packaged Gas Electric

4—Cabinet Type

D = Medium Commercial

5—Refrigerant

Y = R-454B

6—Efficiency Level

B = Standard Efficiency

7, 8, 9—Capacity

090 = 7.5 ton

102 = 8.5 ton

120 = 10 ton

150 = 12.5 ton

10—Major series

A = 1st Design

11—Voltage

C = 3 phase 208-230V, 60 Hz

D = 3 phase 460V, 60 Hz

Y = 3 phase 575V, 60 Hz

12—Drive

F = Belt Drive - VFD Low

G = Belt Drive - VFD Medium

H = Belt Drive - VFD High

13, 14—Heat Capacity

15 = 150,000 Btu/h

20 = 205,000 Btu/h¹

22 = 225,000 Btu/h²

15—Heat Configuration

2 = 2 Stage

B = 2 Stage Stainless

16—Control

A = Core Command™

B = Core Command & Comfort Alert

C = Clear Control

D = Clear Control & Comfort Alert

17—Minor series

A = 1st Design

18, 19, 20—Option Code

See next page

NOTES:

1. 205k heat capacity can only be selected for 7.5 ton models
2. 225k heat capacity can only be selected for 8.5 to 12.5 ton models

FACTORY INSTALLED OPTION CODES FOR RGED (7.5 TO 12.5 TON)

18					19				20				
LV = Louver protection					LF = Low Ambient / Freeze Stat				EC = Economizer				
RH ¹ = HumidiDry/HGRH (Hot Gas Reheat)					NP = Non-powered Convenience Outlet				SS = Supply and Return Smoke Detector				
HA = Hinged Access					DC = Disconnect Switch				RS = Return Smoke Detector				
CC = Coil Coating													
Option code character highlighted below													
A	None				A	None			0	None			
B	LV				B	LF			1	EC			
C	HA				C	NP			2	RS			
D	LV	HA			D	LF	NP		3	EC	RS		
E	LV	CC			E	DC			4	SS	RS		
F	LV	HA	CC		F	LF	DC		5	EC	SS	RS	
N	RH				H	NP	DC						
P	LV	RH			K	LF	NP	DC					
Q	RH	HA											
R	LV	RH	CC										
S	LV	RH	HA										
T	LV	RH	HA	CC									


¹Only available with ClearControl.

Instructions for Factory Installed Option(s) Selection

Note: Three characters following the model number will be utilized to designate a factory-installed option or combination of options. If no factory option(s) is required, "AA0" follows the model number.

- **Step 1:** In the table above, based on the desired features, choose option code character from highlighted options on the left side under the number 18. For example, the option code character "E" has Louver protection and Coil Coating.
- **Step 2:** In the table above, based on the desired features, choose option code character from highlighted options on the left side under the number 19. For example, the option code character "F" has Low Ambient / Freeze Stat and Disconnect switch.
- **Step 3:** In the table above, based on the desired features, choose option code character from highlighted options on the left side under the number 20. For example, the option code character "3" has Economizer and Return Smoke.
- The resulting option code from examples above is: "EF3"
- **Step 4:** Add your option code selection to the end of model number.

○ Example: RGEDYB090ACF152AA EF3 = RGEDYB090ACF152AAEF3

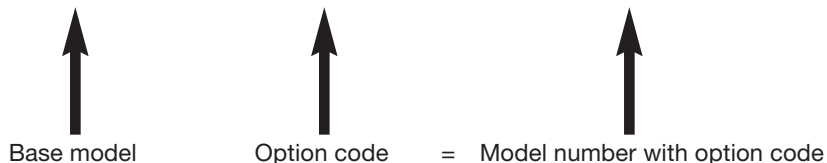

To select an RGED Cooling and Heating unit to meet a job requirement, follow this procedure, with example, using data supplied in this specification sheet.

1. DETERMINE COOLING AND HEATING REQUIREMENTS AND SPECIFIC OPERATING CONDITIONS FROM PLANS AND SPECS.

Example:

Voltage—	208/240V – 3 Phase
Total cooling capacity—	105,000 Btu/h [30.77 kW]
Sensible cooling capacity—	90,000 Btu/h [26.38 kW]
Heating capacity—	159,000 Btu/h [46.60 kW]
*Condenser Entering Air—	95°F [35°C] DB
*Evaporator Mixed Air Entering—	65°F [18°C] WB; 78°F [26°C] DB
*Indoor Air Flow (vertical)—	3750 CFM [1770 L/s]
*External Static Pressure—	.70 in. WG

2. SELECT UNIT TO MEET COOLING REQUIREMENTS.

Since total cooling is within the range of a nominal 10 ton [35.2 kW] unit, enter cooling performance table at 95°F [35°C] DB condenser inlet air. Interpolate between 63°F [2°C] and 67°F [19°C] to determine total and sensible capacity and power input for 65°F [18°C] WB evap inlet air at 3750 CFM [1770 L/s] indoor air flow (table basis):

Total Capacity = 120,060 Btu/h [35.2 kW]
Sensible Capacity = 101,350 Btu/h [29.7 kW]
Power Input (Compressor and Cond. Fans) = 8,950 watts

Use formula [1.10 x CFM x (1 – DR) x (dbE – 80)] in note ① to determine sensible capacity at 80°F [26.7°C] DB evaporator entering air:

Sensible Capacity = 101,350 Btu/h [29.7 kW]

3. CORRECT CAPACITIES OF STEP 2 FOR ACTUAL AIR FLOW.

Select factors from airflow correction table at 3700 & 3800 CFM, average data [1746.2 & 1793.4 L/s] and apply to data obtained in step 2 to obtain gross capacity:

Total Capacity, 120,060 x .99 = 118,859 Btu/h [33.6 kW]
Sensible Capacity, 101,350 x .95 = 96,283 Btu/h [28.2 kW]
Power Input 8,950 x 1.0 = 8,950 Watts

These are Gross Capacities, not corrected for blower motor heat or power.

4. DETERMINE BLOWER SPEED AND WATTS TO MEET SYSTEM DESIGN.

Enter Indoor Blower performance table at 3700 & 3800 CFM, average data [1746.2 & 1793.4 L/s]. Total ESP (external static pressure) per the spec of .70 in. includes the system duct and grilles. Add from the table “Component Air Resistance,” 0.08 for wet coil, for a total selection static pressure of .780 (.8) inches of water, and determine:

RPM = 835
WATTS = 1722
DRIVE = F (Belt Drive, VFD Low Static)

5. CALCULATE INDOOR BLOWER Btu/h HEAT EFFECT FROM MOTOR WATTS, STEP 4.

$$\text{Btu/h} = 1,722 \times 3.412 = 5,875$$

6. CALCULATE NET COOLING CAPACITIES, EQUAL TO GROSS CAPACITY, STEP 3, MINUS INDOOR BLOWER MOTOR HEAT.

$$\begin{aligned} \text{Net Total Capacity} &= 118,859 \text{ (step 3)} - 5,875 \text{ (step 5)} = \\ &112,984 \text{ Btu/h [33.1 kW]} \\ \text{Net Sensible Capacity} &= 96,283 \text{ (step 3)} - 5,875 \text{ (step 5)} = \\ &90,408 \text{ Btu/h [26.5 kW]} \end{aligned}$$

7. CALCULATE UNIT INPUT AND JOB EER.

$$\begin{aligned} \text{Total Power Input} &= 8,950 \text{ (step 3)} + 5,875 \\ &\text{(step 4)} = 10,672 \text{ Watts} \end{aligned}$$

$$\text{EER} = \frac{\text{Net Total Btu/h [kW]} \text{ (step 6)}}{\text{Power Input, Watts (above)}} = \frac{112,984}{10,672} = 10.58$$

8. SELECT UNIT HEATING CAPACITY.

From Physical Data Table read that gas heating output (input rating x efficiency) is:

$$\text{Heating Capacity} = 159,000 \text{ Btu/h [52.45 kW]}$$

Choose Model RGEDYB120ACF222AA

*NOTE: These operating conditions are typical of a commercial application in a 95°F/79°F [35°C/26°C] design area with indoor design of 76°F [24°C] DB and 50% RH and 10% ventilation air, with the unit roof mounted and centered on the zone it conditions by ducts.

[] Designates Metric Conversions

NOM. SIZES 7.5-12.5 TONS [26.4-44.0 kW]

Model RGEDYB Series	090	102	120	150
Cooling Performance^A				
Gross Cooling Capacity Btu/h [kW]	88,000 [25.78]	99,000 [29.01]	118,000 [34.57]	148,000 [43.36]
EER	11	11	11	10.8
IEER ^B	14.6	14.6	14.6	14
Nominal CFM/AHRI Rated CFM [L/s]	3000/3400 [1416/1605]	3400/3300 [1604/1557]	4000/4000 [1888/1888]	5000/4025 [2360/1899]
AHRI Net Cooling Capacity Btu/h [kW]	85,000 [24.9]	96,000 [28.13]	114,000 [33.4]	142,000 [41.61]
Net Sensible Capacity Btu/h [kW]	63,750 [18.68]	72,000 [21.10]	85,500 [25.06]	106,500 [31.21]
Net Latent Capacity Btu/h [kW]	21,250 [6.23]	24,000 [7.03]	28,500 [8.35]	35,500 [10.40]
Net System Power kW	7.73	8.73	10.36	13.15
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	2/Tandem Scroll
No. Stages	2	2	2	2
Outdoor Sound Rating (dB)^C				
	83	81	88	87
Outdoor Coil - Fin Type				
	Louvered	Louvered	Louvered	Louvered
Tube Type	MicroChannel	MicroChannel	MicroChannel	MicroChannel
MicroChannel Depth in. [mm]	0.71 [18]	0.81 [20.6]	1 [25.4]	1 [25.4]
Face Area sq. ft. [sq. m]	25.4 [2.36]	25.6 [2.38]	31.5 [2.93]	31.5 [2.93]
Rows / FPI [FPcm]	1 / 23 [9]	1 / 23 [9]	1 / 23 [9]	1 / 23 [9]
Indoor Coil - Fin Type				
	Louvered	Louvered	Louvered	Louvered
Tube Type	MicroChannel	MicroChannel	MicroChannel	MicroChannel
MicroChannel Depth in. [mm]	1 [25.4]	1.26 [32]	1 [25.4]	1 [25.4]
Face Area sq. ft. [sq. m]	11 [1.02]	10.9 [1.01]	13.8 [1.28]	13.8 [1.28]
Rows / FPI [FPcm]	1 / 20 [8]	1 / 20 [8]	2 / 18 [7]	2 / 18 [7]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type				
	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	2/24 [609.6]	2/24 [609.6]	2/24 [609.6]	2/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	8000 [3775]	8000 [3775]	8500 [4011]	9000 [4247]
No. Motors/HP	2 at 1/5 HP	2 at 1/5 HP	2 at 1/3 HP	2 at 3/4 HP
Motor RPM	820	820	1075	1100
Indoor Fan - Type				
	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/15x15 [381x381]	1/15x15 [381x381]	1/15x15 [381x381]	1/15x15 [381x381]
Drive Type	Belt (Adjustable)	Belt (Adjustable)	Belt (Adjustable)	Belt (Adjustable)
No. Speeds	2	2	2	2
No. Motors	1	1	1	1
Motor RPM	1725	1725	1725	1725
Motor Frame Size	56	56	56	184
Filter - Type				
	Disposable	Disposable	Disposable	Disposable
Furnished	Yes	Yes	Yes	Yes
(NO.) Size Recommended in. [mm x mm x mm]	(4)2x20x20 [51x508x508]	(4)2x20x20 [51x508x508]	(4)2x20x20 [51x508x508]	(4)2x20x25 [51x508x635]
Refrigerant Charge Oz. [g]				
	88 [2495]	114 [3232]	171 [4848]	168 [4763]
Weights				
Net Weight lbs. [kg]	868 [394]	894 [406]	999 [454]	1089 [494]
Ship Weight lbs. [kg]	907 [412]	933 [424]	1038 [471]	1128 [512]

NOTE: Please look at the rating plates pasted on the side of the unit to understand the model number of your unit.
See Page 17 for Notes.

[] Designates Metric Conversions

NOTES:

- A. Cooling Performance is rated at 95°F ambient, 80°F entering dry bulb, 67°F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to $\pm 20\%$ of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 340/360.
- B. EER is rated at AHRI conditions and in accordance with DOE test procedures. Integrated Energy Efficiency Ratio (IEER) is rated in accordance with AHRI Standard 340/360.
- C. Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

RGEDYB HEATING PERFORMANCE

Model RGEDYB	Heating Input Btu/h [kW] (1st Stage / 2nd Stage)	Heating Output Btu/h [kW] (1st Stage / 2nd Stage)	Temperature Rise Range °F [°C] (1st Stage / 2nd Stage)	Steady State Efficiency (%)	No. Burners	No. Stages	Gas Connection Pipe Size In. [mm]
090A**15**A	105,000/150,000 [30.76/43.95]	85,050/121,500 [24.92/35.6]	10-40 [5.6-22.2] / 25-55 [13.9-30.6]	81	6	2	0.75 [19]
090A**20**A	143,000/205,000 [42.06/60.06]	116,200/166,050 [34.07/48.66]	20-50 [11.1-27.8] / 35-65 [19.4-36.1]	81	9	2	0.75 [19]
102A**15**A	105,000/150,000 [30.76/43.95]	85,050/121,500 [24.92/35.6]	5-35 [2.8-19.4] / 15-45 [8.3-25]	81	6	2	0.75 [19]
102A**22**A	157,500/225,000 [46.16/65.92]	127,500/182,250 [37.39/53.4]	15-45 [8.3-25] / 35-65 [19.4-36.1]	81	9	2	0.75 [19]
120A**15**A	105,000/150,000 [30.76/43.95]	85,050/121,500 [24.92/35.6]	10-40 [5.6-22.2] / 20-50 [11.1-27.8]	81	6	2	0.75 [19]
120A**22**A	157,500/225,000 [46.16/65.92]	127,500/182,250 [37.39/53.4]	15-45 [8.3-25] / 35-65 [19.4-36.1]	81	9	2	0.75 [19]
150A**15**A	105,000/150,000 [30.76/43.95]	85,050/121,500 [24.92/35.6]	5-35 [2.8-19.4] / 15-45 [8.3-25]	81	6	2	0.75 [19]
150A**22**A	157,500/225,000 [46.16/65.92]	127,500/182,250 [37.39/53.4]	10-40 [5.6-22.2] / 25-55 [13.9-30.6]	81	9	2	0.75 [19]

Heating Performance limit settings and rating data were established and approved under laboratory test conditions using American National Standard Institute standards. Ratings shown are for elevations up to 2000 feet. For elevations above 2000 feet, ratings should be reduced at the rate of 4% for each 1000 feet above sea level.

[] Designates Metric Conversions

COOLING PERFORMANCE DATA—RGEDYB090

RGEDYB090 - ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		3550 [1675]	3400 [1605]	2375 [1121]	3550 [1675]	3400 [1605]	2375 [1121]	3550 [1675]	3400 [1605]	2375 [1121]	
DR ①		.05	.09	.12	.05	.09	.12	.05	.09	.12	
O U T D O O R D R Y B U L B T E M P E R A T U R E ° F [° C]	75°F [23.9°C]	Total kBtu/h [kW]	105.0 [30.8]	104.1 [30.5]	98.4 [28.8]	99.4 [29.1]	98.6 [28.9]	93.2 [27.3]	93.8 [27.5]	93.0 [27.3]	87.9 [25.8]
		Sens kBtu/h [kW]	60.0 [17.6]	58.8 [17.2]	50.5 [14.8]	70.9 [20.8]	69.4 [20.3]	59.7 [17.5]	81.7 [23.9]	80.1 [23.5]	68.8 [20.2]
		Power	6.4	6.4	6.2	6.4	6.4	6.2	6.4	6.3	6.2
	80°F [26.7°C]	Total kBtu/h [kW]	102.5 [30.0]	101.7 [29.8]	96.1 [28.2]	96.9 [28.4]	96.1 [28.2]	90.9 [26.6]	91.3 [26.8]	90.6 [26.6]	85.6 [25.1]
		Sens kBtu/h [kW]	59.0 [17.3]	57.8 [16.9]	49.7 [14.6]	69.9 [20.5]	68.5 [20.1]	58.8 [17.2]	80.7 [23.7]	79.1 [23.2]	68.0 [19.9]
		Power	6.7	6.7	6.5	6.7	6.6	6.5	6.6	6.6	6.4
	85°F [29.4°C]	Total kBtu/h [kW]	100.0 [29.3]	99.2 [29.1]	93.8 [27.5]	94.4 [27.7]	93.7 [27.5]	88.6 [26.0]	88.8 [26.0]	88.1 [25.8]	83.3 [24.4]
		Sens kBtu/h [kW]	58.0 [17.0]	56.8 [16.6]	48.8 [14.3]	68.9 [20.2]	67.5 [19.8]	58.0 [17.0]	79.8 [23.4]	78.1 [22.9]	67.2 [19.7]
		Power	7.0	7.0	6.8	7.0	6.9	6.7	6.9	6.9	6.7
	90°F [32.2°C]	Total kBtu/h [kW]	97.6 [28.6]	96.8 [28.4]	91.5 [26.8]	92.0 [27.0]	91.3 [26.8]	86.2 [25.3]	86.4 [25.3]	85.7 [25.1]	81.0 [23.7]
		Sens kBtu/h [kW]	57.0 [16.7]	55.9 [16.4]	48.0 [14.1]	67.9 [19.9]	66.5 [19.5]	57.2 [16.8]	78.8 [23.1]	77.2 [22.6]	66.3 [19.4]
		Power	7.3	7.3	7.1	7.3	7.2	7.1	7.2	7.2	7.0
95°F [35°C]	Total kBtu/h [kW]	95.1 [27.9]	94.4 [27.7]	89.2 [26.1]	89.5 [26.2]	88.8 [26.0]	83.9 [24.6]	83.9 [24.6]	83.3 [24.4]	78.7 [23.1]	
	Sens kBtu/h [kW]	56.0 [16.4]	54.9 [16.1]	47.2 [13.8]	66.9 [19.6]	65.6 [19.2]	56.3 [16.5]	77.8 [22.8]	76.2 [22.3]	65.5 [19.2]	
	Power	7.6	7.6	7.4	7.6	7.6	7.4	7.6	7.5	7.3	
100°F [37.8°C]	Total kBtu/h [kW]	92.7 [27.2]	91.9 [26.9]	86.9 [25.5]	87.1 [25.5]	86.4 [25.3]	81.6 [23.9]	81.5 [23.9]	80.8 [23.7]	76.4 [22.4]	
	Sens kBtu/h [kW]	55.1 [16.1]	54.0 [15.8]	46.4 [13.6]	65.9 [19.3]	64.6 [18.9]	55.5 [16.3]	76.8 [22.5]	75.3 [22.1]	64.7 [19.0]	
	Power	8.0	8.0	7.8	8.0	7.9	7.7	7.9	7.9	7.7	
105°F [40.6°C]	Total kBtu/h [kW]	90.2 [26.4]	89.5 [26.2]	84.6 [24.8]	84.6 [24.8]	83.9 [24.6]	79.3 [23.2]	79.0 [23.2]	78.4 [23.0]	74.1 [21.7]	
	Sens kBtu/h [kW]	54.1 [15.9]	53.0 [15.5]	45.5 [13.3]	65.0 [19.1]	63.6 [18.6]	54.7 [16.0]	75.8 [22.2]	74.3 [21.8]	63.8 [18.7]	
	Power	8.4	8.4	8.1	8.3	8.3	8.1	8.3	8.3	8.1	
110°F [43.3°C]	Total kBtu/h [kW]	87.8 [25.7]	87.1 [25.5]	82.3 [24.1]	82.2 [24.1]	81.5 [23.9]	77.0 [22.6]	76.6 [22.5]	75.9 [22.2]	71.8 [21.0]	
	Sens kBtu/h [kW]	53.1 [15.6]	52.0 [15.2]	44.7 [13.1]	64.0 [18.8]	62.7 [18.4]	53.9 [15.8]	74.8 [21.9]	73.3 [21.5]	63.0 [18.5]	
	Power	8.8	8.8	8.5	8.7	8.7	8.5	8.7	8.7	8.4	
115°F [46.1°C]	Total kBtu/h [kW]	85.3 [25.0]	84.6 [24.8]	80.0 [23.4]	79.7 [23.4]	79.1 [23.2]	74.7 [21.9]	74.1 [21.7]	73.5 [21.5]	69.5 [20.4]	
	Sens kBtu/h [kW]	52.1 [15.3]	51.1 [15.0]	43.9 [12.9]	63.0 [18.5]	61.7 [18.1]	53.0 [15.5]	73.9 [21.7]	72.4 [21.2]	62.2 [18.2]	
	Power	9.2	9.2	8.9	9.2	9.1	8.9	9.1	9.1	8.9	
120°F [48.9°C]	Total kBtu/h [kW]	82.8 [24.3]	82.2 [24.1]	77.7 [22.8]	77.2 [22.6]	76.6 [22.5]	72.4 [21.2]	71.6 [21.0]	71.1 [20.8]	67.2 [19.7]	
	Sens kBtu/h [kW]	51.1 [15.0]	50.1 [14.7]	43.1 [12.6]	62.0 [18.2]	60.8 [17.8]	52.2 [15.3]	71.6 [21.0]	71.1 [20.8]	61.4 [18.0]	
	Power	9.7	9.6	9.4	9.6	9.6	9.3	9.6	9.5	9.3	
125°F [51.7°C]	Total kBtu/h [kW]	80.4 [23.6]	79.7 [23.4]	75.4 [22.1]	74.8 [21.9]	74.2 [21.7]	70.1 [20.5]	69.2 [20.3]	68.6 [20.1]	64.9 [19.0]	
	Sens kBtu/h [kW]	50.1 [14.7]	49.1 [14.4]	42.2 [12.4]	61.0 [17.9]	59.8 [17.5]	51.4 [15.1]	69.2 [20.3]	68.6 [20.1]	60.5 [17.7]	
	Power	10.1	10.1	9.8	10.1	10.0	9.8	10.0	10.0	9.7	

DR —Depression ratio Total —Total capacity x 1000 Btu/h
 dbE —Entering air dry bulb Sens —Sensible capacity x 1000 Btu/h
 wbE—Entering air wet bulb Power —kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

COOLING PERFORMANCE DATA—RGEDYB102

RGEDYB102 - ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		3900 [1841]	3300 [1557]	2600 [1227]	3900 [1841]	3300 [1557]	2600 [1227]	3900 [1841]	3300 [1557]	2600 [1227]	
DR ①		.05	.09	.12	.05	.09	.12	.05	.09	.12	
O U T D O O R D R Y B U L B T E M P E R A T U R E ° F [° C]	75°F [23.9°C]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	119.4 [35.0] 69.7 [20.4] 7.3	115.6 [33.9] 64.3 [18.8] 7.2	111.1 [32.6] 57.9 [17.0] 7.1	112.3 [32.9] 83.0 [24.3] 7.3	108.7 [31.9] 76.5 [22.4] 7.2	104.6 [30.7] 68.9 [20.2] 7.1	106.0 [31.1] 95.9 [28.1] 7.2	102.6 [30.1] 88.4 [25.9] 7.1	98.6 [28.9] 79.7 [23.4] 6.9
	80°F [26.7°C]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	116.8 [34.2] 68.4 [20.0] 7.7	113.0 [33.1] 63.0 [18.5] 7.6	108.7 [31.9] 56.8 [16.6] 7.5	109.7 [32.2] 81.6 [23.9] 7.7	106.2 [31.1] 75.3 [22.1] 7.6	102.1 [29.9] 67.8 [19.9] 7.4	103.3 [30.3] 94.6 [27.7] 7.5	100.0 [29.3] 87.2 [25.6] 7.4	96.2 [28.2] 78.5 [23.0] 7.3
	85°F [29.4°C]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	114.0 [33.4] 66.9 [19.6] 8.1	110.3 [32.3] 61.7 [18.1] 8.0	106.1 [31.1] 55.6 [16.3] 7.8	106.9 [31.3] 80.2 [23.5] 8.1	103.5 [30.3] 73.9 [21.7] 7.9	99.5 [29.2] 66.6 [19.5] 7.8	100.5 [29.5] 93.1 [27.3] 7.9	97.3 [28.5] 85.8 [25.1] 7.8	93.6 [27.4] 77.3 [22.7] 7.7
	90°F [32.2°C]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	111.0 [32.5] 65.4 [19.2] 8.5	107.5 [31.5] 60.3 [17.7] 8.3	103.3 [30.3] 54.3 [15.9] 8.2	103.9 [30.5] 78.6 [23.0] 8.4	100.6 [29.5] 72.5 [21.2] 8.3	96.7 [28.3] 65.3 [19.1] 8.1	97.6 [28.6] 91.6 [26.8] 8.3	94.5 [27.7] 84.4 [24.7] 8.2	90.8 [26.6] 76.1 [22.3] 8.0
	95°F [35°C]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	107.9 [31.6] 63.7 [18.7] 8.9	104.5 [30.6] 58.7 [17.2] 8.7	100.4 [29.4] 52.9 [15.5] 8.6	100.8 [29.5] 77.0 [22.6] 8.8	97.6 [28.6] 71.0 [20.8] 8.7	93.8 [27.5] 63.9 [18.7] 8.5	94.5 [27.7] 89.9 [26.3] 8.7	91.4 [26.8] 82.9 [24.3] 8.5	87.9 [25.8] 74.7 [21.9] 8.4
	100°F [37.8°C]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	104.6 [30.7] 62.0 [18.2] 9.2	101.3 [29.7] 57.1 [16.7] 9.1	97.4 [28.5] 51.5 [15.1] 8.9	97.6 [28.6] 75.2 [22.0] 9.2	94.4 [27.7] 69.4 [20.3] 9.0	90.8 [26.6] 62.5 [18.3] 8.9	91.2 [26.7] 88.2 [25.8] 9.1	88.3 [25.9] 81.3 [23.8] 8.9	84.9 [24.9] 73.2 [21.5] 8.7
	105°F [40.6°C]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	101.2 [29.7] 60.1 [17.6] 9.6	98.0 [28.7] 55.4 [16.2] 9.5	94.2 [27.6] 49.9 [14.6] 9.3	94.1 [27.6] 73.4 [21.5] 9.6	91.1 [26.7] 67.6 [19.8] 9.4	87.6 [25.7] 60.9 [17.8] 9.2	87.8 [25.7] 86.3 [25.3] 9.4	85.0 [24.9] 79.5 [23.3] 9.3	81.7 [23.9] 71.7 [21.0] 9.1
	110°F [43.3°C]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	97.6 [28.6] 58.1 [17.0] 10.0	94.5 [27.7] 53.6 [15.7] 9.8	90.9 [26.6] 48.3 [14.2] 9.6	90.6 [26.6] 71.4 [20.9] 9.9	87.7 [25.7] 65.8 [19.3] 9.8	84.3 [24.7] 59.3 [17.4] 9.6	84.2 [24.7] 84.2 [24.7] 9.8	81.5 [23.9] 77.7 [22.8] 9.7	78.4 [23.0] 70 [20.5] 9.5
	115°F [46.1°C]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	93.9 [27.5] 56.1 [16.4] 10.4	90.9 [26.6] 51.7 [15.2] 10.2	87.4 [25.6] 46.6 [13.7] 10.0	86.8 [25.4] 69.3 [20.3] 10.3	84.1 [24.6] 63.9 [18.7] 10.2	80.8 [23.7] 57.6 [16.9] 10.0	80.5 [23.6] 80.5 [23.6] 10.2	77.9 [22.8] 75.8 [22.2] 10.0	74.9 [22.0] 68.3 [20.0] 9.8
	120°F [48.9°C]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	90.0 [26.4] 53.9 [15.8] 10.7	87.2 [25.6] 49.7 [14.6] 10.6	83.8 [24.6] 44.8 [13.1] 10.4	83.0 [24.3] 67.2 [19.7] 10.7	80.3 [23.5] 61.9 [18.1] 10.5	77.2 [22.6] 55.8 [16.4] 10.3	76.6 [22.5] 76.6 [22.5] 10.6	74.1 [21.7] 73.8 [21.6] 10.4	71.3 [20.9] 66.5 [19.5] 10.2
125°F [51.7°C]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	86.0 [25.2] 51.6 [15.1] 11.1	83.2 [24.4] 47.6 [14.0] 10.9	80.0 [23.4] 42.9 [12.6] 10.7	78.9 [23.1] 64.9 [19.0] 11.1	76.4 [22.4] 59.8 [17.5] 10.9	73.4 [21.5] 53.9 [15.8] 10.7	72.6 [21.3] 72.6 [21.3] 10.9	70.2 [20.6] 70.2 [20.6] 10.8	67.5 [19.8] 64.6 [18.9] 10.6	

DR —Depression ratio
 dbE —Entering air dry bulb
 wbE —Entering air wet bulb

Total —Total capacity x 1000 Btu/h
 Sens —Sensible capacity x 1000 Btu/h
 Power —kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 - DR) x (dbE - 80)].

[] Designates Metric Conversions

COOLING PERFORMANCE DATA—RGEDYB120

RGEDYB120 - ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		4925 [2324]	4000 [1888]	3275 [1546]	4925 [2324]	4000 [1888]	3275 [1546]	4925 [2324]	4000 [1888]	3275 [1546]	
DR ①		.05	.09	.12	.05	.09	.12	.05	.09	.12	
O U T D O O R D R Y B U L B T E M P E R A T U R E ° F [° C]	75°F [23.9°C]	Total kBtu/h [kW]	151.0 [44.3]	144.9 [42.5]	140.1 [41.1]	141.7 [41.5]	136.0 [39.9]	131.5 [38.5]	134.0 [39.3]	128.5 [37.7]	124.3 [36.4]
		Sens kBtu/h [kW]	89.7 [26.3]	80.9 [23.7]	74.1 [21.7]	109.5 [32.1]	98.8 [29.0]	90.4 [26.5]	130.8 [38.3]	118.1 [34.6]	108.1 [31.7]
		Power	9.3	9.1	9.0	9.2	9.0	8.9	9.1	8.9	8.7
	80°F [26.7°C]	Total kBtu/h [kW]	147.9 [43.3]	141.9 [41.6]	137.3 [40.2]	138.6 [40.6]	133.0 [39.0]	128.6 [37.7]	130.9 [38.4]	125.6 [36.8]	121.4 [35.6]
		Sens kBtu/h [kW]	88.4 [25.9]	79.8 [23.4]	73.0 [21.4]	108.2 [31.7]	97.6 [28.6]	89.4 [26.2]	129.5 [38.0]	116.9 [34.3]	107.0 [31.4]
		Power	9.7	9.5	9.3	9.6	9.4	9.2	9.5	9.3	9.1
	85°F [29.4°C]	Total kBtu/h [kW]	144.6 [42.4]	138.8 [40.7]	134.2 [39.3]	135.3 [39.7]	129.8 [38.0]	125.6 [36.8]	127.6 [37.4]	122.4 [35.9]	118.4 [34.7]
		Sens kBtu/h [kW]	86.9 [25.5]	78.5 [23.0]	71.8 [21.0]	106.7 [31.3]	96.3 [28.2]	88.2 [25.8]	127.6 [37.4]	115.6 [33.9]	105.8 [31.0]
		Power	10.1	9.9	9.7	10.0	9.8	9.6	9.8	9.6	9.5
	90°F [32.2°C]	Total kBtu/h [kW]	141.1 [41.4]	135.4 [39.7]	130.9 [38.4]	131.8 [38.6]	126.5 [37.1]	122.3 [35.8]	124.1 [36.4]	119.1 [34.9]	115.1 [33.7]
		Sens kBtu/h [kW]	85.4 [25.0]	77.0 [22.6]	70.5 [20.7]	105.1 [30.8]	94.9 [27.8]	86.9 [25.5]	124.1 [36.4]	114.2 [33.5]	104.5 [30.6]
		Power	10.4	10.2	10.1	10.4	10.1	10.0	10.2	10.0	9.8
95°F [35°C]	Total kBtu/h [kW]	137.4 [40.3]	131.8 [38.6]	127.5 [37.4]	128.1 [37.5]	122.9 [36.0]	118.8 [34.8]	120.3 [35.3]	115.5 [33.9]	111.7 [32.7]	
	Sens kBtu/h [kW]	83.6 [24.5]	75.5 [22.1]	69.1 [20.3]	103.4 [30.3]	93.3 [27.3]	85.4 [25.0]	120.3 [35.3]	112.6 [33.0]	103.1 [30.2]	
	Power	10.8	10.6	10.4	10.7	10.5	10.3	10.6	10.4	10.2	
100°F [37.8°C]	Total kBtu/h [kW]	133.4 [39.1]	128.1 [37.5]	123.8 [36.3]	124.1 [36.4]	119.1 [34.9]	115.2 [33.8]	116.4 [34.1]	111.7 [32.7]	108.0 [31.7]	
	Sens kBtu/h [kW]	81.7 [23.9]	73.8 [21.6]	67.5 [19.8]	101.5 [29.7]	91.6 [26.8]	83.9 [24.6]	116.4 [34.1]	110.9 [32.5]	101.5 [29.7]	
	Power	11.2	11.0	10.8	11.1	10.9	10.7	11.0	10.8	10.6	
105°F [40.6°C]	Total kBtu/h [kW]	129.3 [37.9]	124.1 [36.4]	120.0 [35.2]	120.0 [35.2]	115.1 [33.7]	111.3 [32.6]	112.3 [32.9]	107.7 [31.6]	104.2 [30.5]	
	Sens kBtu/h [kW]	79.7 [23.4]	72.0 [21.1]	65.9 [19.3]	99.5 [29.2]	89.8 [26.3]	82.2 [24.1]	112.3 [32.9]	107.7 [31.6]	99.8 [29.2]	
	Power	11.6	11.3	11.2	11.5	11.3	11.1	11.3	11.1	10.9	
110°F [43.3°C]	Total kBtu/h [kW]	124.9 [36.6]	119.9 [35.1]	115.9 [34.0]	115.6 [33.9]	111.0 [32.5]	107.3 [31.4]	107.9 [31.6]	103.5 [30.3]	100.1 [29.3]	
	Sens kBtu/h [kW]	77.6 [22.7]	70.0 [20.5]	64.1 [18.8]	97.3 [28.5]	87.9 [25.8]	80.4 [23.6]	107.9 [31.6]	103.5 [30.3]	98.1 [28.8]	
	Power	12.0	11.7	11.5	11.9	11.6	11.4	11.7	11.5	11.3	
115°F [46.1°C]	Total kBtu/h [kW]	120.4 [35.3]	115.5 [33.9]	111.7 [32.7]	111.1 [32.6]	106.6 [31.2]	103.1 [30.2]	103.3 [30.3]	99.2 [29.1]	95.9 [28.1]	
	Sens kBtu/h [kW]	75.2 [22.0]	67.9 [19.9]	62.2 [18.2]	95.0 [27.8]	85.8 [25.1]	78.5 [23.0]	103.3 [30.3]	99.2 [29.1]	95.9 [28.1]	
	Power	12.3	12.1	11.9	12.2	12.0	11.8	12.1	11.9	11.7	
120°F [48.9°C]	Total kBtu/h [kW]	115.6 [33.9]	110.9 [32.5]	107.3 [31.4]	106.3 [31.2]	102.0 [29.9]	98.6 [28.9]	98.5 [28.9]	94.6 [27.7]	91.5 [26.8]	
	Sens kBtu/h [kW]	72.8 [21.3]	65.7 [19.3]	60.1 [17.6]	92.6 [27.1]	83.5 [24.5]	76.5 [22.4]	98.5 [28.9]	94.6 [27.7]	91.5 [26.8]	
	Power	12.7	12.5	12.3	12.6	12.4	12.2	12.5	12.2	12.0	
125°F [51.7°C]	Total kBtu/h [kW]	110.6 [32.4]	106.1 [31.1]	102.6 [30.1]	101.3 [29.7]	97.2 [28.5]	94.0 [27.5]	93.5 [27.4]	89.8 [26.3]	86.8 [25.4]	
	Sens kBtu/h [kW]	70.2 [20.6]	63.3 [18.6]	58.0 [17.0]	90.0 [26.4]	81.2 [23.8]	74.3 [21.8]	93.5 [27.4]	89.8 [26.3]	86.8 [25.4]	
	Power	13.1	12.8	12.6	13.0	12.7	12.5	12.9	12.6	12.4	

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb
Total —Total capacity x 1000 Btu/h
Sens —Sensible capacity x 1000 Btu/h
Power —kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 - DR) x (dbE - 80)].

[] Designates Metric Conversions

COOLING PERFORMANCE DATA – RGEDYB150

RGEDYB150 - ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		6000 [2832]	4025 [1900]	4000 [1888]	6000 [2832]	4025 [1900]	4000 [1888]	6000 [2832]	4025 [1900]	4000 [1888]	
DR ①		.05	.09	.12	.05	.09	.12	.05	.09	.12	
O U T D O O R D R Y B U L B T E M P E R A T U R E ° F [° C]	75°F [23.9°C]	Total kBtu/h [kW]	193.6 [56.7]	177.8 [52.1]	177.6 [52.1]	181.3 [53.1]	166.5 [48.8]	166.3 [48.7]	170.3 [49.9]	156.3 [45.8]	156.1 [45.8]
		Sens kBtu/h [kW]	116.5 [34.1]	94.8 [27.8]	94.5 [27.7]	136.8 [40.1]	111.3 [32.6]	111.0 [32.5]	155.5 [45.6]	126.6 [37.1]	126.2 [37.0]
		Power	7.5	7.2	7.2	7.8	7.5	7.5	7.3	7.0	7.0
	80°F [26.7°C]	Total kBtu/h [kW]	189.3 [55.5]	173.8 [50.9]	173.6 [50.9]	177.0 [51.9]	162.5 [47.6]	162.3 [47.6]	165.9 [48.6]	152.3 [44.6]	152.2 [44.6]
		Sens kBtu/h [kW]	114.1 [33.4]	92.9 [27.2]	92.6 [27.1]	134.4 [39.4]	109.4 [32.1]	109.0 [31.9]	153.2 [44.9]	124.6 [36.5]	124.3 [36.4]
		Power	7.9	7.6	7.6	8.3	7.9	7.9	7.7	7.4	7.4
	85°F [29.4°C]	Total kBtu/h [kW]	184.9 [54.2]	169.8 [49.8]	169.6 [49.7]	172.6 [50.6]	158.5 [46.5]	158.3 [46.4]	161.5 [47.3]	148.3 [43.5]	148.2 [43.4]
		Sens kBtu/h [kW]	111.6 [32.7]	90.8 [26.6]	90.6 [26.6]	131.9 [38.7]	107.3 [31.4]	107.0 [31.4]	150.7 [44.2]	122.6 [35.9]	122.3 [35.8]
		Power	8.4	8.0	8.0	8.7	8.3	8.3	8.2	7.8	7.8
	90°F [32.2°C]	Total kBtu/h [kW]	180.5 [52.9]	165.7 [48.6]	165.5 [48.5]	168.1 [49.3]	154.4 [45.3]	154.2 [45.2]	157.1 [46.0]	144.2 [42.3]	144.1 [42.2]
		Sens kBtu/h [kW]	109.1 [32.0]	88.7 [26.0]	88.5 [25.9]	129.3 [37.9]	105.2 [30.8]	104.9 [30.7]	148.1 [43.4]	120.5 [35.3]	120.2 [35.2]
		Power	8.8	8.4	8.4	9.1	8.8	8.8	8.6	8.2	8.2
95°F [35°C]	Total kBtu/h [kW]	175.9 [51.6]	161.5 [47.3]	161.4 [47.3]	163.6 [47.9]	150.2 [44.0]	150.0 [44.0]	152.6 [44.7]	140.1 [41.1]	139.9 [41.0]	
	Sens kBtu/h [kW]	106.4 [31.2]	86.6 [25.4]	86.3 [25.3]	126.6 [37.1]	103.0 [30.2]	102.8 [30.1]	145.4 [42.6]	118.3 [34.7]	118.0 [34.6]	
	Power	9.2	8.8	8.8	9.6	9.2	9.2	9.0	8.7	8.7	
100°F [37.8°C]	Total kBtu/h [kW]	171.3 [50.2]	157.3 [46.1]	157.1 [46]	159.0 [46.6]	146.0 [42.8]	145.8 [42.7]	148.0 [43.4]	135.8 [39.8]	135.7 [39.8]	
	Sens kBtu/h [kW]	103.6 [30.4]	84.3 [24.7]	84.0 [24.6]	123.8 [36.3]	100.8 [29.5]	100.5 [29.5]	142.6 [41.8]	116.0 [34.0]	115.7 [33.9]	
	Power	9.7	9.3	9.3	10.0	9.6	9.6	9.5	9.1	9.1	
105°F [40.6°C]	Total kBtu/h [kW]	166.7 [48.9]	153.0 [44.8]	152.9 [44.8]	154.4 [45.3]	141.7 [41.5]	141.6 [41.5]	143.3 [42.0]	131.6 [38.6]	131.4 [38.5]	
	Sens kBtu/h [kW]	100.7 [29.5]	81.9 [24.0]	81.7 [23.9]	120.9 [35.4]	98.4 [28.8]	98.1 [28.8]	139.7 [40.9]	113.7 [33.3]	113.3 [33.2]	
	Power	10.1	9.7	9.7	10.4	10.0	10.0	9.9	9.5	9.5	
110°F [43.3°C]	Total kBtu/h [kW]	161.9 [47.5]	148.7 [43.6]	148.5 [43.5]	149.6 [43.8]	137.4 [40.3]	137.2 [40.2]	138.6 [40.6]	127.2 [37.3]	127.1 [37.3]	
	Sens kBtu/h [kW]	97.6 [28.6]	79.4 [23.3]	79.2 [23.2]	117.9 [34.6]	95.9 [28.1]	95.7 [28.0]	136.7 [40.1]	111.2 [32.6]	110.9 [32.5]	
	Power	10.5	10.1	10.1	10.9	10.4	10.4	10.3	9.9	9.9	
115°F [46.1°C]	Total kBtu/h [kW]	157.1 [46.0]	144.3 [42.3]	144.1 [42.2]	144.8 [42.4]	132.9 [39.0]	132.8 [38.9]	133.8 [39.2]	122.8 [36.0]	122.7 [36.0]	
	Sens kBtu/h [kW]	94.5 [27.7]	76.9 [22.5]	76.7 [22.5]	114.8 [33.6]	93.4 [27.4]	93.1 [27.3]	133.5 [39.1]	108.7 [31.9]	108.3 [31.7]	
	Power	11.0	10.5	10.5	11.3	10.8	10.8	10.8	10.3	10.3	
120°F [48.9°C]	Total kBtu/h [kW]	152.3 [44.6]	139.8 [41.0]	139.6 [40.9]	139.9 [41.0]	128.5 [37.7]	128.3 [37.6]	128.9 [37.8]	118.3 [34.7]	118.2 [34.6]	
	Sens kBtu/h [kW]	91.2 [26.7]	74.2 [21.7]	74.0 [21.7]	111.5 [32.7]	90.7 [26.6]	90.5 [26.5]	128.9 [37.8]	106.0 [31.1]	105.7 [31.0]	
	Power	11.4	10.9	10.9	11.7	11.3	11.2	11.2	10.7	10.7	
125°F [51.7°C]	Total kBtu/h [kW]	147.3 [43.2]	135.2 [39.6]	135.1 [39.6]	135.0 [39.6]	123.9 [36.3]	123.8 [36.3]	123.9 [36.3]	113.8 [33.4]	113.7 [33.3]	
	Sens kBtu/h [kW]	87.9 [25.8]	71.5 [21.0]	71.3 [20.9]	108.2 [31.7]	88.0 [25.8]	87.7 [25.7]	123.9 [36.3]	103.3 [30.3]	103.0 [30.2]	
	Power	11.8	11.3	11.3	12.2	11.7	11.7	11.6	11.2	11.2	

DR —Depression ratio
 dbE —Entering air dry bulb
 wbE —Entering air wet bulb

Total —Total capacity x 1000 Btu/h
 Sens —Sensible capacity x 1000 Btu/h
 Power —kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 - DR) x (dbE - 80)].

[] Designates Metric Conversions

GROSS SYSTEMS PERFORMANCE DATA (LOW HUMIDIDRY MODE)—RGEDYB090

		ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①									
wbE		65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]			
CFM [L/s]		2190 [1034]	1825 [861]	1460 [689]	2190 [1034]	1825 [861]	1460 [689]	2190 [1034]	1825 [861]	1460 [689]	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60 [15.6]	Total kBtu/h [kW]	28.8 [8.4]	27.8 [8.1]	26.8 [7.8]	25.4 [7.4]	24.5 [7.2]	23.6 [6.9]	24.6 [7.2]	23.8 [7.0]	22.9 [6.7]
		Sens kBtu/h [kW]	3.2 [0.9]	2.9 [0.8]	2.6 [0.8]	3.8 [1.1]	3.5 [1.0]	3.1 [0.9]	7.3 [2.1]	6.7 [2.0]	6.1 [1.8]
		Power	4.5	4.4	4.4	4.5	4.4	4.4	4.5	4.4	4.4
	65 [18.3]	Total kBtu/h [kW]	28.6 [8.4]	27.6 [8.1]	26.6 [7.8]	25.2 [7.4]	24.3 [7.1]	23.4 [6.9]	24.4 [7.2]	23.6 [6.9]	22.7 [6.7]
		Sens kBtu/h [kW]	3.1 [0.9]	2.9 [0.8]	2.6 [0.8]	3.8 [1.1]	3.4 [1.0]	3.1 [0.9]	7.3 [2.1]	6.7 [2.0]	6.1 [1.8]
		Power	4.5	4.4	4.4	4.5	4.5	4.4	4.5	4.4	4.4
	70 [21.1]	Total kBtu/h [kW]	28.3 [8.3]	27.3 [8.0]	26.3 [7.7]	24.8 [7.3]	24.0 [7.0]	23.1 [6.8]	24.1 [7.1]	23.3 [6.8]	22.4 [6.6]
Sens kBtu/h [kW]		3.0 [0.9]	2.7 [0.8]	2.5 [0.7]	3.6 [1.1]	3.3 [1.0]	3.0 [0.9]	7.1 [2.1]	6.5 [1.9]	5.9 [1.7]	
Power		4.5	4.5	4.4	4.6	4.5	4.4	4.5	4.5	4.4	
75 [23.9]	Total kBtu/h [kW]	27.8 [8.2]	26.8 [7.9]	25.9 [7.6]	24.4 [7.1]	23.5 [6.9]	22.7 [6.6]	23.6 [6.9]	22.8 [6.7]	22.0 [6.4]	
	Sens kBtu/h [kW]	2.7 [0.8]	2.4 [0.7]	2.2 [0.6]	3.3 [1.0]	3.0 [0.9]	2.7 [0.8]	6.9 [2.0]	6.3 [1.8]	5.7 [1.7]	
	Power	4.6	4.5	4.4	4.6	4.5	4.4	4.6	4.5	4.4	
80 [26.7]	Total kBtu/h [kW]	27.2 [8.0]	26.3 [7.7]	25.3 [7.4]	23.8 [7.0]	23.0 [6.7]	22.1 [6.5]	23.1 [6.8]	22.3 [6.5]	21.4 [6.3]	
	Sens kBtu/h [kW]	2.3 [0.7]	2.1 [0.6]	1.9 [0.5]	2.9 [0.8]	2.6 [0.8]	2.4 [0.7]	6.4 [1.9]	5.9 [1.7]	5.3 [1.6]	
	Power	4.6	4.5	4.4	4.6	4.5	4.5	4.6	4.5	4.4	
85 [29.4]	Total kBtu/h [kW]	26.5 [7.8]	25.6 [7.5]	24.6 [7.2]	23.1 [6.8]	22.3 [6.5]	21.5 [6.3]	22.3 [6.5]	21.6 [6.3]	20.8 [6.1]	
	Sens kBtu/h [kW]	1.7 [0.5]	1.6 [0.5]	1.4 [0.4]	2.3 [0.7]	2.1 [0.6]	1.9 [0.6]	5.9 [1.7]	5.4 [1.6]	4.9 [1.4]	
	Power	4.6	4.6	4.5	4.7	4.6	4.5	4.6	4.6	4.5	
90 [32.2]	Total kBtu/h [kW]	25.7 [7.5]	24.8 [7.3]	23.9 [7.0]	22.2 [6.5]	21.5 [6.3]	20.7 [6.1]	21.5 [6.3]	20.7 [6.1]	20.0 [5.9]	
	Sens kBtu/h [kW]	1.0 [0.3]	0.9 [0.3]	0.8 [0.2]	1.6 [0.5]	1.5 [0.4]	1.4 [0.4]	5.2 [1.5]	4.8 [1.4]	4.3 [1.3]	
	Power	4.7	4.6	4.5	4.7	4.6	4.5	4.7	4.6	4.5	

GROSS SYSTEMS PERFORMANCE DATA (HIGH HUMIDIDRY MODE)—RGEDYB090

		ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①									
wbE		65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]			
CFM [L/s]		3600 [1699]	3150 [1487]	2400 [1133]	3600 [1699]	3150 [1487]	2400 [1133]	3600 [1699]	3150 [1487]	2400 [1133]	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60 [15.6]	Total kBtu/h [kW]	48.5 [14.2]	47.3 [13.9]	45.3 [13.3]	32.0 [9.4]	31.2 [9.1]	29.9 [8.8]	31.1 [9.1]	30.3 [8.9]	29.0 [8.5]
		Sens kBtu/h [kW]	4.1 [1.2]	3.8 [1.1]	3.4 [1.0]	1.9 [0.5]	1.8 [0.5]	1.6 [0.5]	7.6 [2.2]	7.2 [2.1]	6.4 [1.9]
		Power	7.0	6.9	6.7	6.9	6.8	6.7	7.0	6.9	6.7
	65 [18.3]	Total kBtu/h [kW]	50.8 [14.9]	49.6 [14.5]	47.4 [13.9]	34.3 [10.1]	33.5 [9.8]	32.0 [9.4]	33.4 [9.8]	32.5 [9.5]	31.1 [9.1]
		Sens kBtu/h [kW]	6.9 [2.0]	6.5 [1.9]	5.7 [1.7]	4.6 [1.4]	4.4 [1.3]	3.9 [1.1]	10.4 [3.1]	9.8 [2.9]	8.7 [2.5]
		Power	6.9	6.8	6.6	6.8	6.7	6.6	6.9	6.8	6.6
	70 [21.1]	Total kBtu/h [kW]	51.6 [15.1]	50.3 [14.7]	48.1 [14.1]	35.1 [10.3]	34.2 [10.0]	32.7 [9.6]	34.1 [10.0]	33.3 [9.8]	31.8 [9.3]
Sens kBtu/h [kW]		8.0 [2.4]	7.5 [2.2]	6.7 [2.0]	5.8 [1.7]	5.4 [1.6]	4.8 [1.4]	11.6 [3.4]	10.9 [3.2]	9.7 [2.8]	
Power		6.9	6.8	6.7	6.8	6.8	6.6	6.9	6.8	6.7	
75 [23.9]	Total kBtu/h [kW]	50.8 [14.9]	49.6 [14.5]	47.4 [13.9]	34.3 [10.1]	33.5 [9.8]	32.0 [9.4]	33.4 [9.8]	32.5 [9.5]	31.1 [9.1]	
	Sens kBtu/h [kW]	7.6 [2.2]	7.1 [2.1]	6.3 [1.8]	5.3 [1.6]	5.0 [1.5]	4.4 [1.3]	11.1 [3.3]	10.4 [3.1]	9.3 [2.7]	
	Power	7.0	6.9	6.8	7.0	6.9	6.7	7.0	6.9	6.8	
80 [26.7]	Total kBtu/h [kW]	48.5 [14.2]	47.3 [13.9]	45.3 [13.3]	32.0 [9.4]	31.2 [9.1]	29.9 [8.7]	31.1 [9.1]	30.3 [8.9]	29.0 [8.5]	
	Sens kBtu/h [kW]	5.5 [1.6]	5.1 [1.5]	4.6 [1.3]	3.2 [0.9]	3.0 [0.9]	2.7 [0.8]	9.0 [2.6]	8.5 [2.5]	7.5 [2.2]	
	Power	7.2	7.1	7.0	7.2	7.1	6.9	7.2	7.1	7	
85 [29.4]	Total kBtu/h [kW]	44.7 [13.1]	43.6 [12.8]	41.7 [12.2]	28.2 [8.3]	27.5 [8.0]	26.3 [7.7]	27.2 [8.0]	26.5 [7.8]	25.4 [7.4]	
	Sens kBtu/h [kW]	1.8 [0.5]	1.6 [0.5]	1.5 [0.4]	-0.5 [-0.1]	-0.5 [-0.1]	-0.4 [-0.1]	5.3 [1.6]	5.0 [1.5]	4.4 [1.3]	
	Power	7.5	7.4	7.3	7.5	7.4	7.2	7.5	7.4	7.3	
90 [32.2]	Total kBtu/h [kW]	39.3 [11.5]	38.3 [11.2]	36.6 [10.7]	22.8 [6.7]	22.2 [6.5]	21.2 [6.2]	21.8 [6.4]	21.3 [6.2]	20.3 [6.0]	
	Sens kBtu/h [kW]	-3.6 [-1.1]	-3.4 [-1.0]	-3.0 [-0.9]	-5.8 [-1.7]	-5.5 [-1.6]	-4.9 [-1.4]	0.0 [0.0]	0.0 [0.0]	0.0 [0.0]	
	Power	7.9	7.8	7.7	7.9	7.8	7.6	7.9	7.8	7.7	

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 Btu/h
Sens —Sensible capacity x 1000 Btu/h
Power —kW input

NOTES: ① When the entering air dry bulb is other than 75°F [23.9°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

GROSS SYSTEMS PERFORMANCE DATA (LOW HUMIDIDRY MODE) – RGEDYB102

		ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①									
wbE		65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]			
CFM [L/s]		2420 [1142]	2015 [951]	1610 [760]	2420 [1142]	2015 [951]	1610 [760]	2420 [1142]	2015 [951]	1610 [760]	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60 [15.6]	Total kBtu/h [kW]	38.5 [11.3]	37.1 [10.9]	35.8 [10.5]	32.6 [9.5]	31.4 [9.2]	30.3 [8.9]	28.3 [8.3]	27.3 [8.0]	26.3 [7.7]
		Sens kBtu/h [kW]	5.2 [1.5]	4.7 [1.4]	4.3 [1.3]	5.1 [1.5]	4.6 [1.4]	4.2 [1.2]	6.9 [2.0]	6.3 [1.8]	5.7 [1.7]
		Power	5.3	5.2	5.1	5.1	5.1	5.0	5.0	4.9	4.8
	65 [18.3]	Total kBtu/h [kW]	37.9 [11.1]	36.5 [10.7]	35.2 [10.3]	31.9 [9.3]	30.8 [9.0]	29.7 [8.7]	27.6 [8.1]	26.7 [7.8]	25.7 [7.5]
		Sens kBtu/h [kW]	4.2 [1.2]	3.8 [1.1]	3.5 [1.0]	4.1 [1.2]	3.7 [1.1]	3.4 [1.0]	5.9 [1.7]	5.4 [1.6]	4.9 [1.4]
		Power	5.4	5.3	5.2	5.2	5.1	5.0	5.0	5.0	4.9
	70 [21.1]	Total kBtu/h [kW]	37.2 [10.9]	35.8 [10.5]	34.5 [10.1]	31.2 [9.1]	30.1 [8.8]	29.0 [8.5]	26.9 [7.9]	26.0 [7.6]	25.0 [7.3]
Sens kBtu/h [kW]		3.4 [1.0]	3.1 [0.9]	2.8 [0.8]	3.3 [1.0]	3.0 [0.9]	2.7 [0.8]	5.1 [1.5]	4.7 [1.4]	4.2 [1.2]	
Power		5.5	5.4	5.3	5.3	5.2	5.1	5.1	5.0	4.9	
75 [23.9]	Total kBtu/h [kW]	36.4 [10.7]	35.1 [10.3]	33.8 [9.9]	30.5 [8.9]	29.4 [8.6]	28.3 [8.3]	26.2 [7.7]	25.3 [7.4]	24.4 [7.1]	
	Sens kBtu/h [kW]	2.9 [0.8]	2.6 [0.8]	2.4 [0.7]	2.7 [0.8]	2.5 [0.7]	2.3 [0.7]	4.5 [1.3]	4.2 [1.2]	3.8 [1.1]	
	Power	5.5	5.4	5.3	5.3	5.3	5.2	5.2	5.1	5.0	
80 [26.7]	Total kBtu/h [kW]	35.6 [10.4]	34.4 [10.1]	33.1 [9.7]	29.7 [8.7]	28.6 [8.4]	27.6 [8.1]	25.4 [7.4]	24.5 [7.2]	23.6 [6.9]	
	Sens kBtu/h [kW]	2.5 [0.7]	2.3 [0.7]	2.1 [0.6]	2.4 [0.7]	2.2 [0.6]	2.0 [0.6]	4.2 [1.2]	3.8 [1.1]	3.5 [1.0]	
	Power	5.5	5.4	5.4	5.4	5.3	5.2	5.2	5.1	5.0	
85 [29.4]	Total kBtu/h [kW]	34.8 [10.2]	33.5 [9.8]	32.3 [9.5]	28.8 [8.4]	27.8 [8.1]	26.8 [7.9]	24.6 [7.2]	23.7 [6.9]	22.8 [6.7]	
	Sens kBtu/h [kW]	2.3 [0.7]	2.1 [0.6]	1.9 [0.6]	2.2 [0.6]	2.0 [0.6]	1.8 [0.5]	4.0 [1.2]	3.7 [1.1]	3.3 [1.0]	
	Power	5.6	5.5	5.4	5.4	5.3	5.2	5.2	5.1	5.0	
90 [32.2]	Total kBtu/h [kW]	33.9 [9.9]	32.7 [9.6]	31.5 [9.2]	27.9 [8.2]	27.0 [7.9]	26.0 [7.6]	23.7 [6.9]	22.8 [6.7]	22.0 [6.4]	
	Sens kBtu/h [kW]	2.3 [0.7]	2.1 [0.6]	1.9 [0.6]	2.2 [0.6]	2.0 [0.6]	1.8 [0.5]	4.0 [1.2]	3.7 [1.1]	3.3 [1.0]	
	Power	5.6	5.5	5.4	5.4	5.3	5.2	5.2	5.1	5.1	

GROSS SYSTEMS PERFORMANCE DATA (HIGH HUMIDIDRY MODE) – RGEDYB102

		ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①									
wbE		65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]			
CFM [L/s]		4080 [1926]	3375 [1593]	2720 [1284]	4080 [1926]	3375 [1593]	2720 [1284]	4080 [1926]	3375 [1593]	2720 [1284]	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60 [15.6]	Total kBtu/h [kW]	69.8 [20.5]	67.3 [19.7]	64.9 [19.0]	50.2 [14.7]	48.3 [14.2]	46.6 [13.7]	50.1 [14.7]	48.2 [14.1]	46.5 [13.6]
		Sens kBtu/h [kW]	17.7 [5.2]	16.1 [4.7]	14.7 [4.3]	14.6 [4.3]	13.3 [3.9]	12.1 [3.5]	22.7 [6.6]	20.6 [6.0]	18.8 [5.5]
		Power	7.1	6.9	6.8	7.0	6.9	6.8	7.1	6.9	6.8
	65 [18.3]	Total kBtu/h [kW]	64.5 [18.9]	62.1 [18.2]	60.0 [17.6]	44.9 [13.1]	43.2 [12.7]	41.7 [12.2]	44.8 [13.1]	43.1 [12.6]	41.6 [12.2]
		Sens kBtu/h [kW]	12.5 [3.7]	11.4 [3.3]	10.3 [3.0]	9.4 [2.8]	8.6 [2.5]	7.8 [2.3]	17.4 [5.1]	15.9 [4.7]	14.5 [4.2]
		Power	7.1	7.0	6.9	7.1	6.9	6.8	7.1	7.0	6.9
	70 [21.1]	Total kBtu/h [kW]	60.8 [17.8]	58.5 [17.2]	56.5 [16.5]	41.1 [12.1]	39.6 [11.6]	38.2 [11.2]	41.0 [12.0]	39.5 [11.6]	38.1 [11.2]
Sens kBtu/h [kW]		9.0 [2.6]	8.2 [2.4]	7.4 [2.2]	5.9 [1.7]	5.3 [1.6]	4.9 [1.4]	13.9 [4.1]	12.7 [3.7]	11.5 [3.4]	
Power		7.3	7.1	7.0	7.2	7.1	7.0	7.3	7.2	7.0	
75 [23.9]	Total kBtu/h [kW]	58.6 [17.2]	56.4 [16.5]	54.5 [16.0]	39.0 [11.4]	37.5 [11.0]	36.2 [10.6]	38.9 [11.4]	37.4 [11.0]	36.1 [10.6]	
	Sens kBtu/h [kW]	7.1 [2.1]	6.5 [1.9]	5.9 [1.7]	4.0 [1.2]	3.7 [1.1]	3.3 [1.0]	12.1 [3.5]	11.0 [3.2]	10.0 [2.9]	
	Power	7.5	7.4	7.3	7.5	7.4	7.2	7.6	7.4	7.3	
80 [26.7]	Total kBtu/h [kW]	58.0 [17.0]	55.9 [16.4]	53.9 [15.8]	38.4 [11.2]	37.0 [10.8]	35.7 [10.4]	38.3 [11.2]	36.9 [10.8]	35.6 [10.4]	
	Sens kBtu/h [kW]	7.0 [2.1]	6.4 [1.9]	5.8 [1.7]	3.9 [1.1]	3.6 [1.0]	3.2 [0.9]	12.0 [3.5]	10.9 [3.2]	9.9 [2.9]	
	Power	7.9	7.8	7.6	7.9	7.7	7.6	7.9	7.8	7.6	
85 [29.4]	Total kBtu/h [kW]	59.0 [17.3]	56.8 [16.6]	54.8 [16.1]	39.3 [11.5]	37.9 [11.1]	36.6 [10.7]	39.2 [11.5]	37.8 [11.1]	36.5 [10.7]	
	Sens kBtu/h [kW]	8.6 [2.5]	7.8 [2.3]	7.1 [2.1]	5.5 [1.6]	5.0 [1.5]	4.5 [1.3]	13.5 [4.0]	12.3 [3.6]	11.2 [3.3]	
	Power	8.4	8.2	8.1	8.3	8.2	8.0	8.4	8.2	8.1	
90 [32.2]	Total kBtu/h [kW]	61.5 [18.0]	59.2 [17.4]	57.2 [16.7]	41.9 [12.3]	40.3 [11.8]	38.9 [11.4]	41.8 [12.2]	40.2 [11.8]	38.8 [11.4]	
	Sens kBtu/h [kW]	11.8 [3.5]	10.8 [3.2]	9.8 [2.9]	8.7 [2.6]	7.9 [2.3]	7.2 [2.1]	16.8 [4.9]	15.3 [4.5]	13.9 [4.1]	
	Power	8.9	8.8	8.6	8.9	8.7	8.6	8.9	8.8	8.6	

DR —Depression ratio
 dbE —Entering air dry bulb
 wbE —Entering air wet bulb

Total —Total capacity x 1000 Btu/h
 Sens —Sensible capacity x 1000 Btu/h
 Power —kW input

NOTES: ① When the entering air dry bulb is other than 75°F [23.9°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

GROSS SYSTEMS PERFORMANCE DATA (LOW HUMIDIDRY MODE)—RGEDYB120

		ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①									
wbE		65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]			
CFM [L/s]		2880 [1359]	2400 [1133]	1920 [906]	2880 [1359]	2400 [1133]	1920 [906]	2880 [1359]	2400 [1133]	1920 [906]	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60 [15.6]	Total kBtu/h [kW]	39.3 [11.5]	37.9 [11.1]	36.6 [10.7]	34.0 [10.0]	32.8 [9.6]	31.6 [9.3]	29.6 [8.7]	28.5 [8.4]	27.5 [8.1]
		Sens kBtu/h [kW]	3.9 [1.1]	3.6 [1.0]	3.2 [0.9]	3.7 [1.1]	3.4 [1.0]	3.0 [0.9]	4.9 [1.4]	4.5 [1.3]	4.1 [1.2]
		Power	4.8	4.7	4.7	4.8	4.8	4.7	4.9	4.8	4.8
	65 [18.3]	Total kBtu/h [kW]	38.2 [11.2]	36.9 [10.8]	35.5 [10.4]	32.9 [9.6]	31.8 [9.3]	30.6 [9.0]	28.4 [8.3]	27.4 [8.0]	26.4 [7.7]
		Sens kBtu/h [kW]	2.5 [0.7]	2.3 [0.7]	2.1 [0.6]	2.3 [0.7]	2.1 [0.6]	1.9 [0.6]	3.5 [1.0]	3.2 [0.9]	2.9 [0.8]
		Power	4.9	4.8	4.7	4.9	4.8	4.7	5	4.9	4.8
	70 [21.1]	Total kBtu/h [kW]	37.5 [11.0]	36.2 [10.6]	34.8 [10.2]	32.2 [9.4]	31.1 [9.1]	29.9 [8.8]	27.7 [8.1]	26.7 [7.8]	25.8 [7.6]
Sens kBtu/h [kW]		1.7 [0.5]	1.6 [0.5]	1.4 [0.4]	1.5 [0.4]	1.3 [0.4]	1.2 [0.4]	2.7 [0.8]	2.5 [0.7]	2.2 [0.7]	
Power		4.9	4.8	4.8	4.9	4.9	4.8	5.0	4.9	4.9	
75 [23.9]	Total kBtu/h [kW]	37.2 [10.9]	35.8 [10.5]	34.5 [10.1]	31.9 [9.3]	30.8 [9.0]	29.6 [8.7]	27.4 [8.0]	26.4 [7.7]	25.5 [7.5]	
	Sens kBtu/h [kW]	1.5 [0.4]	1.4 [0.4]	1.3 [0.4]	1.3 [0.4]	1.2 [0.3]	1.1 [0.3]	2.5 [0.7]	2.3 [0.7]	2.1 [0.6]	
	Power	5.0	4.9	4.8	5.0	4.9	4.9	5.1	5.0	4.9	
80 [26.7]	Total kBtu/h [kW]	37.2 [10.9]	35.9 [10.5]	34.6 [10.1]	31.9 [9.4]	30.8 [9.0]	29.7 [8.7]	27.5 [8.0]	26.5 [7.8]	25.5 [7.5]	
	Sens kBtu/h [kW]	2.0 [0.6]	1.8 [0.5]	1.6 [0.5]	1.8 [0.5]	1.6 [0.5]	1.5 [0.4]	3.0 [0.9]	2.7 [0.8]	2.5 [0.7]	
	Power	5.1	5.0	4.9	5.1	5.0	4.9	5.2	5.1	5.0	
85 [29.4]	Total kBtu/h [kW]	37.7 [11.0]	36.4 [10.7]	35.0 [10.3]	32.4 [9.5]	31.3 [9.2]	30.1 [8.8]	27.9 [8.2]	26.9 [7.9]	26.0 [7.6]	
	Sens kBtu/h [kW]	3.0 [0.9]	2.8 [0.8]	2.5 [0.7]	2.8 [0.8]	2.6 [0.8]	2.3 [0.7]	4.0 [1.2]	3.7 [1.1]	3.4 [1.0]	
	Power	5.2	5.1	5.0	5.2	5.2	5.1	5.3	5.2	5.1	
90 [32.2]	Total kBtu/h [kW]	38.6 [11.3]	37.2 [10.9]	35.8 [10.5]	33.3 [9.7]	32.1 [9.4]	30.9 [9.1]	28.8 [8.4]	27.8 [8.1]	26.8 [7.8]	
	Sens kBtu/h [kW]	4.7 [1.4]	4.3 [1.3]	3.9 [1.2]	4.5 [1.3]	4.1 [1.2]	3.7 [1.1]	5.7 [1.7]	5.2 [1.5]	4.8 [1.4]	
	Power	5.4	5.3	5.2	5.4	5.3	5.2	5.5	5.4	5.3	

GROSS SYSTEMS PERFORMANCE DATA (HIGH HUMIDIDRY MODE)—RGEDYB120

		ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①									
wbE		65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]			
CFM [L/s]		4800 [2265]	3940 [1859]	3200 [1510]	4800 [2265]	3940 [1859]	3200 [1510]	4800 [2265]	3940 [1859]	3200 [1510]	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60 [15.6]	Total kBtu/h [kW]	91.7 [26.9]	88.2 [25.8]	85.2 [25.0]	63.4 [18.6]	61.0 [17.9]	58.9 [17.3]	72.9 [21.4]	70.1 [20.5]	67.7 [19.8]
		Sens kBtu/h [kW]	21.7 [6.4]	19.7 [5.8]	18.0 [5.3]	15.5 [4.5]	14.0 [4.1]	12.8 [3.8]	26.5 [7.8]	24.0 [7.0]	21.9 [6.4]
		Power	7.7	7.6	7.5	7.6	7.5	7.3	7.7	7.6	7.4
	65 [18.3]	Total kBtu/h [kW]	77.4 [22.7]	74.4 [21.8]	71.9 [21.1]	49.1 [14.4]	47.2 [13.8]	45.6 [13.4]	58.6 [17.2]	56.3 [16.5]	54.4 [15.9]
		Sens kBtu/h [kW]	15.2 [4.5]	13.8 [4.0]	12.6 [3.7]	8.9 [2.6]	8.1 [2.4]	7.4 [2.2]	19.9 [5.8]	18.1 [5.3]	16.5 [4.8]
		Power	7.7	7.6	7.5	7.6	7.4	7.3	7.7	7.5	7.4
	70 [21.1]	Total kBtu/h [kW]	68.0 [19.9]	65.4 [19.2]	63.1 [18.5]	39.6 [11.6]	38.1 [11.2]	36.8 [10.8]	49.1 [14.4]	47.3 [13.9]	45.7 [13.4]
Sens kBtu/h [kW]		11.2 [3.3]	10.2 [3.0]	9.3 [2.7]	5.0 [1.5]	4.5 [1.3]	4.1 [1.2]	16.0 [4.7]	14.5 [4.2]	13.2 [3.9]	
Power		7.9	7.8	7.6	7.8	7.6	7.5	7.9	7.7	7.6	
75 [23.9]	Total kBtu/h [kW]	63.4 [18.6]	61.0 [17.9]	58.9 [17.3]	35.1 [10.3]	33.7 [9.9]	32.6 [9.5]	44.6 [13.1]	42.9 [12.6]	41.4 [12.1]	
	Sens kBtu/h [kW]	9.8 [2.9]	8.9 [2.6]	8.1 [2.4]	3.6 [1.0]	3.2 [0.9]	2.9 [0.9]	14.5 [4.3]	13.2 [3.9]	12.0 [3.5]	
	Power	8.3	8.1	8.0	8.1	8.0	7.9	8.2	8.1	8.0	
80 [26.7]	Total kBtu/h [kW]	63.7 [18.7]	61.3 [17.9]	59.2 [17.3]	35.4 [10.4]	34.0 [10]	32.8 [9.6]	44.9 [13.1]	43.1 [12.6]	41.7 [12.2]	
	Sens kBtu/h [kW]	11.0 [3.2]	9.9 [2.9]	9.1 [2.7]	4.7 [1.4]	4.3 [1.2]	3.9 [1.1]	15.7 [4.6]	14.2 [4.2]	13.0 [3.8]	
	Power	8.9	8.7	8.6	8.7	8.6	8.4	8.8	8.7	8.5	
85 [29.4]	Total kBtu/h [kW]	68.8 [20.2]	66.2 [19.4]	63.9 [18.7]	40.5 [11.9]	39.0 [11.4]	37.6 [11.0]	50.0 [14.7]	48.1 [14.1]	46.4 [13.6]	
	Sens kBtu/h [kW]	14.7 [4.3]	13.3 [3.9]	12.1 [3.6]	8.4 [2.5]	7.6 [2.2]	7.0 [2.0]	19.4 [5.7]	17.6 [5.2]	16.1 [4.7]	
	Power	9.6	9.5	9.3	9.5	9.3	9.2	9.6	9.4	9.3	
90 [32.2]	Total kBtu/h [kW]	78.8 [23.1]	75.8 [22.2]	73.2 [21.5]	50.5 [14.8]	48.6 [14.2]	46.9 [13.7]	60.0 [17.6]	57.7 [16.9]	55.7 [16.3]	
	Sens kBtu/h [kW]	20.9 [6.1]	19.0 [5.6]	17.3 [5.1]	14.7 [4.3]	13.3 [3.9]	12.1 [3.6]	25.6 [7.5]	23.3 [6.8]	21.2 [6.2]	
	Power	10.6	10.4	10.2	10.5	10.3	10.1	10.6	10.4	10.2	

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 Btu/h
Sens —Sensible capacity x 1000 Btu/h
Power —kW input

NOTES: ① When the entering air dry bulb is other than 75°F [23.9°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

GROSS SYSTEMS PERFORMANCE DATA (LOW HUMIDIDRY MODE) – RGEDYB150

ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①											
wbE			65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]		
CFM [L/s]			3020 [1425]	2515 [1187]	2010 [949]	3020 [1425]	2515 [1187]	2010 [949]	3020 [1425]	2515 [1187]	2010 [949]
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60 [15.6]	Total kBtu/h [kW]	43.9 [12.9]	42.4 [12.4]	40.8 [12.0]	42.2 [12.4]	40.8 [11.9]	39.3 [11.5]	33.9 [9.9]	32.7 [9.6]	31.5 [9.2]
		Sens kBtu/h [kW]	16.0 [4.7]	14.7 [4.3]	13.3 [3.9]	20.3 [5.9]	18.5 [5.4]	16.8 [4.9]	13.2 [3.9]	12.0 [3.5]	10.9 [3.2]
		Power	4.6	4.5	4.4	4.5	4.4	4.4	4.5	4.4	4.4
	65 [18.3]	Total kBtu/h [kW]	38.7 [11.3]	37.3 [10.9]	35.9 [10.5]	37.0 [10.8]	35.7 [10.5]	34.4 [10.1]	28.7 [8.4]	27.7 [8.1]	26.6 [7.8]
		Sens kBtu/h [kW]	6.0 [1.8]	5.5 [1.6]	5.0 [1.5]	10.3 [3.0]	9.4 [2.8]	8.5 [2.5]	3.2 [0.9]	2.9 [0.8]	2.6 [0.8]
		Power	4.4	4.3	4.3	4.4	4.3	4.2	4.4	4.3	4.2
	70 [21.1]	Total kBtu/h [kW]	34.8 [10.2]	33.6 [9.8]	32.4 [9.5]	33.1 [9.7]	32.0 [9.4]	30.8 [9.0]	24.8 [7.3]	24.0 [7.0]	23.1 [6.8]
Sens kBtu/h [kW]		-1.1 [-0.3]	-1.0 [-0.3]	-0.9 [-0.3]	3.2 [0.9]	2.9 [0.8]	2.6 [0.8]	-3.9 [-1.2]	-3.6 [-1.1]	-3.3 [-1.0]	
Power		4.4	4.3	4.2	4.3	4.2	4.1	4.3	4.2	4.2	
75 [23.9]	Total kBtu/h [kW]	32.4 [9.5]	31.3 [9.2]	30.2 [8.8]	30.8 [9.0]	29.7 [8.7]	28.6 [8.4]	22.4 [6.6]	21.6 [6.3]	20.9 [6.1]	
	Sens kBtu/h [kW]	-5.3 [-1.5]	-4.8 [-1.4]	-4.4 [-1.3]	-1.0 [-0.3]	-1.0 [-0.3]	-0.9 [-0.3]	-8.2 [-2.4]	-7.5 [-2.2]	-6.8 [-2.0]	
	Power	4.4	4.3	4.2	4.3	4.2	4.2	4.3	4.3	4.2	
80 [26.7]	Total kBtu/h [kW]	31.5 [9.2]	30.4 [8.9]	29.3 [8.6]	29.8 [8.7]	28.8 [8.4]	27.7 [8.1]	21.5 [6.3]	20.7 [6.1]	20.0 [5.9]	
	Sens kBtu/h [kW]	-6.6 [-1.9]	-6.0 [-1.8]	-5.5 [-1.6]	-2.4 [-0.7]	-2.2 [-0.6]	-2.0 [-0.6]	-9.5 [-2.8]	-8.7 [-2.5]	-7.9 [-2.3]	
	Power	4.5	4.4	4.3	4.4	4.3	4.3	4.4	4.3	4.3	
85 [29.4]	Total kBtu/h [kW]	32.0 [9.4]	30.9 [9.0]	29.7 [8.7]	30.3 [8.9]	29.2 [8.6]	28.2 [8.3]	22.0 [6.4]	21.2 [6.2]	20.4 [6.0]	
	Sens kBtu/h [kW]	-5.0 [-1.5]	-4.6 [-1.3]	-4.2 [-1.2]	-0.8 [-0.2]	-0.7 [-0.2]	-0.7 [-0.2]	-7.9 [-2.3]	-7.2 [-2.1]	-6.5 [-1.9]	
	Power	4.7	4.6	4.5	4.6	4.5	4.4	4.6	4.5	4.4	
90 [32.2]	Total kBtu/h [kW]	33.9 [9.9]	32.7 [9.6]	31.5 [9.2]	32.2 [9.4]	31.1 [9.1]	29.9 [8.8]	23.9 [7.0]	23.1 [6.8]	22.2 [6.5]	
	Sens kBtu/h [kW]	-0.6 [-0.2]	-0.5 [-0.2]	-0.5 [-0.1]	3.7 [1.1]	3.4 [1.0]	3.0 [0.9]	-3.4 [-1.0]	-3.1 [-0.9]	-2.9 [-0.8]	
	Power	4.9	4.8	4.7	4.9	4.8	4.7	4.9	4.8	4.7	

GROSS SYSTEMS PERFORMANCE DATA (HIGH HUMIDIDRY MODE) – RGEDYB150

ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①											
wbE			65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]		
CFM [L/s]			6000 [2832]	4300 [2029]	4000 [1888]	6000 [2832]	4300 [2029]	4000 [1888]	6000 [2832]	4300 [2029]	4000 [1888]
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60 [15.6]	Total kBtu/h [kW]	86.7 [25.4]	80.9 [23.7]	79.9 [23.4]	85.0 [24.9]	79.3 [23.2]	78.3 [22.9]	76.8 [22.5]	71.7 [21]	70.8 [20.7]
		Sens kBtu/h [kW]	22.2 [6.5]	18.8 [5.5]	18.2 [5.3]	30.1 [8.8]	25.4 [7.4]	24.6 [7.2]	39.8 [11.7]	33.6 [9.9]	32.5 [9.5]
		Power	9.4	9.1	9.1	9.2	8.9	8.8	9.3	9.0	9.0
	65 [18.3]	Total kBtu/h [kW]	82.0 [24.0]	76.5 [22.4]	75.6 [22.1]	80.3 [23.5]	75.0 [22.0]	74.0 [21.7]	72.2 [21.1]	67.3 [19.7]	66.5 [19.5]
		Sens kBtu/h [kW]	11.2 [3.3]	9.4 [2.8]	9.1 [2.7]	19.0 [5.6]	16.1 [4.7]	15.6 [4.6]	28.8 [8.4]	24.3 [7.1]	23.5 [6.9]
		Power	9.7	9.4	9.4	9.5	9.2	9.1	9.7	9.3	9.3
	70 [21.1]	Total kBtu/h [kW]	77.2 [22.6]	72.1 [21.1]	71.1 [20.8]	75.5 [22.1]	70.5 [20.7]	69.6 [20.4]	67.4 [19.7]	62.8 [18.4]	62.1 [18.2]
Sens kBtu/h [kW]		2.1 [0.6]	1.7 [0.5]	1.7 [0.5]	9.9 [2.9]	8.4 [2.5]	8.1 [2.4]	19.7 [5.8]	16.6 [4.9]	16.1 [4.7]	
Power		10.3	9.9	9.8	10.0	9.7	9.6	10.2	9.8	9.8	
75 [23.9]	Total kBtu/h [kW]	72.3 [21.2]	67.4 [19.8]	66.6 [19.5]	70.6 [20.7]	65.9 [19.3]	65.0 [19.1]	62.4 [18.3]	58.2 [17.1]	57.5 [16.8]	
	Sens kBtu/h [kW]	-5.1 [-1.5]	-4.3 [-1.3]	-4.2 [-1.2]	2.8 [0.8]	2.4 [0.7]	2.3 [0.7]	12.5 [3.7]	10.6 [3.1]	10.2 [3.0]	
	Power	11.0	10.6	10.5	10.7	10.4	10.3	10.9	10.5	10.4	
80 [26.7]	Total kBtu/h [kW]	67.2 [19.7]	62.7 [18.4]	61.9 [18.1]	65.5 [19.2]	61.1 [17.9]	60.3 [17.7]	57.3 [16.8]	53.5 [15.7]	52.8 [15.5]	
	Sens kBtu/h [kW]	-10.3 [-3.0]	-8.7 [-2.5]	-8.4 [-2.5]	-2.4 [-0.7]	-2.0 [-0.6]	-1.9 [-0.6]	7.3 [2.2]	6.2 [1.8]	6.0 [1.8]	
	Power	11.9	11.5	11.4	11.7	11.3	11.2	11.8	11.4	11.3	
85 [29.4]	Total kBtu/h [kW]	62.0 [18.2]	57.8 [16.9]	57.1 [16.7]	60.3 [17.7]	56.2 [16.5]	55.5 [16.3]	52.1 [15.3]	48.6 [14.2]	48.0 [14.1]	
	Sens kBtu/h [kW]	-13.5 [-4.0]	-11.4 [-3.3]	-11.0 [-3.2]	-5.6 [-1.6]	-4.7 [-1.4]	-4.6 [-1.3]	4.1 [1.2]	3.5 [1]	3.4 [1.0]	
	Power	13.0	12.6	12.5	12.8	12.3	12.3	12.9	12.5	12.4	
90 [32.2]	Total kBtu/h [kW]	56.6 [16.6]	52.8 [15.5]	52.1 [15.3]	54.9 [16.1]	51.2 [15.0]	50.6 [14.8]	46.7 [13.7]	43.6 [12.8]	43.0 [12.6]	
	Sens kBtu/h [kW]	-14.7 [-4.3]	-12.4 [-3.6]	-12.0 [-3.5]	-6.9 [-2.0]	-5.8 [-1.7]	-5.6 [-1.6]	2.9 [0.8]	2.4 [0.7]	2.3 [0.7]	
	Power	14.3	13.8	13.8	14.1	13.6	13.5	14.2	13.8	13.7	

DR —Depression ratio
 dbE —Entering air dry bulb
 wbE —Entering air wet bulb

Total —Total capacity x 1000 Btu/h
 Sens —Sensible capacity x 1000 Btu/h
 Power —kW input

NOTES: ① When the entering air dry bulb is other than 75°F [23.9°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE— 7.5 TON [26.4 kW]—60 Hz—DOWNFLOW

Air Flow CFM [L/s]	Model RGEDYB090 Voltage 208/230, 460, 575 — 3 phase 60 Hz																																							
	External Static Pressure—Inches of Water [kPa]																																							
	0.1 [0.2]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]	0.9 [0.22]	1.0 [0.25]	1.1 [0.27]	1.2 [0.30]	1.3 [0.32]	1.4 [0.35]	1.5 [0.37]	1.6 [0.40]	1.7 [0.42]	1.8 [0.45]	1.9 [0.47]	2.0 [0.50]																				
2400 [1133]	—	551	782	885	814	619	848	652	885	684	926	717	969	748	1016	780	1065	810	1118	841	1174	870	1233	900	1294	929	1359	957	1427	985	1498	1012	1572	1039	1649	1065	1729	1091	1813	
2500 [1180]	—	562	816	596	848	629	884	661	923	693	964	725	1009	756	1057	787	1108	817	1162	846	1219	876	1279	904	1343	933	1409	960	1478	987	1550	1014	1626	1040	1704	1066	1786	1092	1870	
2600 [1227]	—	574	851	607	885	639	922	671	962	702	1006	733	1052	784	1101	794	1153	823	1209	852	1267	881	1329	909	1393	937	1461	964	1531	990	1605	1016	1682	1042	1762	1067	1844	1092	1930	
2700 [1274]	553	857	585	889	618	925	650	963	681	1004	712	1049	742	1096	772	1147	801	1201	830	1258	858	1317	886	1380	914	1446	941	1515	967	1587	993	1662	1019	1740	1044	1821	1068	1905	1092	1993
2800 [1321]	565	896	597	930	629	966	660	1006	691	1049	721	1095	751	1144	780	1196	808	1251	837	1309	864	1370	892	1434	919	1501	945	1572	971	1645	996	1721	1021	1801	1045	1883	1069	1969	1093	2057
2900 [1368]	577	937	609	972	640	1010	670	1051	701	1096	730	1143	759	1193	788	1246	816	1303	843	1362	871	1425	897	1490	923	1559	949	1630	974	1705	999	1783	1023	1864	1047	1948	1070	2035	1093	2124
3000 [1416]	590	981	621	1017	651	1057	681	1099	710	1145	739	1193	768	1245	796	1300	823	1357	850	1418	877	1482	903	1549	928	1619	953	1692	978	1768	1002	1847	1026	1929	1049	2014	1072	2103	1094	2194
3100 [1463]	602	1027	633	1065	662	1105	692	1149	720	1196	749	1246	777	1299	804	1355	831	1414	857	1476	883	1541	908	1610	933	1681	958	1755	982	1833	1005	1913	1028	1997	1051	2083	1073	2173	1094	2266
3200 [1510]	615	1075	645	1114	674	1157	702	1202	731	1250	758	1301	785	1356	812	1413	838	1473	864	1537	889	1603	914	1673	938	1746	962	1821	986	1900	1008	1982	1031	2067	1053	2155	1074	2246	1095	2340
3300 [1557]	628	1126	657	1166	685	1210	713	1256	741	1306	768	1359	794	1414	820	1473	846	1535	871	1600	896	1668	920	1739	944	1813	967	1890	989	1970	1012	2053	1033	2139	1055	2229	1075	2321	1096	2416
3400 [1604]	640	1179	669	1221	697	1266	724	1314	751	1365	777	1419	803	1476	829	1536	854	1599	878	1665	902	1734	926	1807	949	1882	971	1960	993	2042	1015	2126	1036	2214	1057	2305	1077	2398	1097	2495
3500 [1652]	653	1235	681	1278	708	1324	735	1373	761	1425	787	1481	812	1539	837	1601	861	1665	885	1733	909	1803	932	1877	954	1954	976	2034	997	2116	1018	2202	1039	2291	1059	2383	1078	2478	1097	2576
3600 [1699]	666	1292	693	1337	720	1384	746	1435	771	1489	797	1545	821	1605	845	1668	869	1734	892	1803	915	1875	938	1950	959	2028	981	2109	1001	2193	1022	2280	1042	2371	1061	2464	1080	2560	1098	2660

NOTE: F-Drive left of first bold line, G-Drive between bold lines, H-Drive right of second bold line.

Drive Package	F										G										H																				
Motor H.P. [W]	2 [1491.4]										3 [2237.1]										3 [2237.1]																				
Blower Sheave	AK84H										AK84H										AK84H																				
Motor Sheave	1VP40										1VP50										1VP56																				
Belt	A49										A50										A51																				
Turns Open	0	1	2	3	4	5	5	4	3	2	1	0	992	949	908	866	823	782	740	698	656	614	572	530	488	446	404	362	320	278	236	194	152	110	68	26	14	2	0		
RPM	767	721	678	635	590	548	506	464	422	380	338	296	254	212	170	128	86	44	2	0	1108	1067	1029	987	946	905	864	823	782	741	700	659	618	577	536	495	454	413	372	331	290

NOTES: 1. Factory sheave settings are shown in bold type.

2. Do not set motor sheave below minimum or maximum turns open shown.

3. Re-adjustment of sheave required to achieve rated airflow at AHRI minimum External Static Pressure

4. Drive data shown is for vertical airflow with dry coil. Add component resistance (below) to duct resistance to determine total External Static Pressure.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE— 7.5 TON [26.4 kW]—60 Hz—DOWNFLOW (CONTINUED)

Airflow CFM [L/s]	AIRFLOW CORRECTION FACTORS *			COMPONENT AIRFLOW RESISTANCE					Pressure Drop MERV 13	
	Total kBtu/h	Sensible kBtu/h	Power kW	Wet Coil	Vertical Economizer RA Damper Open	Concentric Diffuser RXRN-AEF2000 & Concentric Adapter RXMC-DD01 (Flush)	Concentric Diffuser RXRN-AED2000 & Concentric Adapter RXMC-DD01 (Drop)	Pressure Drop MERV 8		
Resistance — Inches of Water [kPa]										
2400 [1133]	0.96	0.89	0.98	0.04 [.01]	0.01 [.00]	0.66 [.16]	0.53 [.13]	0.093 [.02]	0.047 [.01]	
2500 [1180]	0.96	0.90	0.99	0.05 [.01]	0.02 [.00]	0.71 [.18]	0.57 [.14]	0.098 [.02]	0.055 [.01]	
2600 [1227]	0.97	0.92	0.99	0.05 [.01]	0.02 [.01]	0.75 [.19]	0.60 [.15]	0.103 [.02]	0.062 [.01]	
2700 [1274]	0.97	0.93	0.99	0.05 [.01]	0.03 [.01]	0.80 [.20]	0.65 [.16]	0.108 [.03]	0.070 [.02]	
2800 [1321]	0.98	0.95	0.99	0.06 [.01]	0.04 [.01]	0.85 [.21]	0.69 [.17]	0.113 [.03]	0.078 [.02]	
2900 [1368]	0.98	0.96	1.00	0.06 [.02]	0.04 [.01]	0.91 [.23]	0.74 [.18]	0.117 [.03]	0.085 [.02]	
3000 [1416]	0.99	0.97	1.00	0.07 [.02]	0.05 [.01]	0.96 [.24]	0.79 [.20]	0.122 [.03]	0.093 [.02]	
3100 [1463]	1.00	0.99	1.00	0.07 [.02]	0.06 [.02]	1.02 [.25]	0.86 [.21]	0.127 [.03]	0.100 [.02]	
3200 [1510]	1.00	1.00	1.01	0.07 [.02]	0.07 [.02]	1.08 [.27]	0.92 [.23]	0.132 [.03]	0.108 [.03]	
3300 [1557]	1.01	1.02	1.01	0.08 [.02]	0.08 [.02]	1.15 [.29]	0.99 [.25]	0.137 [.03]	0.115 [.03]	
3400 [1604]	1.01	1.03	1.01	0.08 [.02]	0.09 [.02]	1.21 [.30]	1.05 [.26]	0.142 [.03]	0.123 [.03]	
3500 [1652]	1.02	1.05	1.01	0.09 [.02]	0.10 [.02]	1.29 [.32]	1.09 [.27]	0.147 [.04]	0.131 [.03]	
3600 [1699]	1.02	1.06	1.02	0.09 [.02]	0.11 [.03]	1.36 [.34]	1.13 [.28]	0.152 [.04]	0.138 [.03]	

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE— 7.5 TON [26.4 kW]—60 Hz—SIDEFLOW

Air Flow CFM [L/s]		External Static Pressure—Inches of Water [kPa]																																						
		0.1 [0.2]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]	0.9 [0.22]	1.0 [0.25]	1.1 [0.27]	1.2 [0.30]	1.3 [0.32]	1.4 [0.35]	1.5 [0.37]	1.6 [0.40]	1.7 [0.42]	1.8 [0.45]	1.9 [0.47]	2.0 [0.50]																			
2400 [1133]	—	—	—	568	822	594	853	629	887	663	925	697	965	730	1009	763	1056	794	1106	826	1159	856	1216	886	1275	915	1338	943	1404	971	1474	998	1546	1025	1622	1051	1700	1076	1782	
2500 [1180]	—	—	—	568	848	604	881	638	917	672	956	705	998	738	1044	769	1092	801	1144	831	1199	861	1258	890	1319	919	1384	947	1452	974	1523	1001	1597	1027	1674	1052	1755	1077	1838	
2600 [1227]	—	—	543	846	579	877	613	912	647	950	681	991	713	1035	745	1082	777	1132	807	1186	837	1243	867	1303	895	1366	923	1433	951	1502	978	1575	1004	1651	1029	1730	1054	1812	1078	1898
2700 [1274]	—	—	554	877	589	910	623	946	657	986	689	1029	722	1074	753	1124	784	1176	814	1231	844	1290	872	1352	901	1417	928	1485	955	1556	981	1631	1007	1708	1032	1789	1056	1873	1079	1961
2800 [1321]	—	—	566	911	600	946	634	984	666	1026	699	1070	730	1118	761	1169	792	1223	821	1280	850	1340	878	1404	906	1470	933	1540	959	1613	985	1690	1010	1769	1034	1852	1058	1938	1081	2027
2900 [1368]	543	916	577	949	611	986	644	1026	676	1069	708	1115	739	1164	770	1217	799	1273	828	1332	857	1394	885	1459	912	1528	938	1599	964	1674	989	1752	1014	1833	1037	1918	1061	2005	1083	2096
3000 [1416]	555	955	589	990	622	1029	655	1070	687	1115	718	1163	748	1214	778	1269	807	1326	836	1387	864	1451	891	1518	918	1588	944	1662	969	1738	994	1818	1017	1901	1041	1987	1063	2077	1085	2169
3100 [1463]	568	998	601	1035	634	1075	666	1118	697	1165	728	1215	758	1268	787	1324	816	1383	844	1445	871	1511	898	1580	924	1652	949	1727	974	1806	998	1887	1022	1972	1044	2060	1066	2151	1088	2245
3200 [1510]	581	1044	614	1083	646	1125	677	1170	708	1218	738	1270	768	1324	796	1382	824	1443	852	1507	879	1575	905	1646	931	1719	955	1796	980	1876	1003	1960	1026	2046	1048	2136	1070	2229	1091	2325
3300 [1557]	594	1093	626	1134	658	1178	689	1225	719	1275	749	1328	778	1384	806	1444	833	1507	860	1573	887	1642	912	1714	937	1790	962	1869	985	1951	1008	2036	1031	2124	1052	2216	1073	2310	1094	2408
3400 [1604]	607	1146	639	1189	670	1234	701	1283	730	1335	759	1390	788	1448	815	1509	843	1574	869	1642	895	1713	920	1787	944	1864	968	1945	991	2028	1014	2115	1036	2205	1057	2298	1077	2395	1097	2494
3500 [1652]	621	1203	652	1247	683	1294	713	1344	742	1398	770	1455	798	1515	825	1578	852	1644	878	1714	903	1786	928	1862	952	1941	975	2024	997	2109	1019	2198	1041	2290	1061	2385	1081	2483	1101	2584
3600 [1699]	635	1262	666	1308	696	1357	725	1409	754	1465	782	1523	809	1585	836	1650	862	1718	887	1789	912	1864	936	1941	959	2022	982	2106	1004	2194	1025	2284	1046	2378	1066	2474	1086	2574	1104	2677

NOTE: F- Drive left of first bold line, G- Drive between bold lines, H- Drive right of second bold line.

Drive Package	F	G	H
Motor H.P. [W]	2 [1491.4]	3 [2237.1]	3 [2237.1]
Blower Sheave	AK84H	AK84H	AK84H
Motor Sheave	1VP40	1VP50	1VP56
Belt	A49	A50	A51
Turns Open	0	1	2
RPM	765	720	676
	1	2	3
	4	5	5
	589	544	544
	633	633	633
	865	823	780
	908	865	823
	949	908	865
	989	949	908
	1108	1108	1108
	1067	1067	1067
	1029	1029	1029
	987	987	987
	946	946	946
	905	905	905

- NOTES:** 1. Factory sheave settings are shown in bold type.
 2. Do not set motor sheave below minimum or maximum turns open shown.
 3. Re-adjustment of sheave required to achieve rated airflow at AHRI minimum External Static Pressure
 4. Add component resistance (below) to duct resistance to determine total External Static Pressure.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE — 7.5 TON [26.4 kW]—60 Hz—SIDEFLOW (CONTINUED)

Airflow CFM [L/s]	AIRFLOW CORRECTION FACTORS *			COMPONENT AIRFLOW RESISTANCE					Pressure Drop MERV 8	Pressure Drop MERV 13
	Total kBtu/h	Sensible kBtu/h	Power kW	Wet Coil	Horizontal Economizer RA Damper Open	Concentric Diffuser RXRN-AEF2000 & Concentric Adapter RXMC-DD01 (Flush)	Concentric Diffuser RXRN-AED2000 & Concentric Adapter RXMC-DD01 (Drop)	Resistance — Inches of Water [kPa]		
2400 [1133]	0.96	0.89	0.98	0.04 [0.01]	0.21 [0.05]	0.66 [0.16]	0.53 [0.13]	0.093 [0.02]	0.047 [0.01]	
2500 [1180]	0.96	0.90	0.99	0.05 [0.01]	0.25 [0.06]	0.71 [0.18]	0.57 [0.14]	0.098 [0.02]	0.055 [0.01]	
2600 [1227]	0.97	0.92	0.99	0.05 [0.01]	0.28 [0.07]	0.75 [0.19]	0.60 [0.15]	0.103 [0.02]	0.062 [0.01]	
2700 [1274]	0.97	0.93	0.99	0.05 [0.01]	0.32 [0.08]	0.80 [0.20]	0.65 [0.16]	0.108 [0.03]	0.070 [0.02]	
2800 [1321]	0.98	0.95	0.99	0.06 [0.01]	0.36 [0.09]	0.85 [0.21]	0.69 [0.17]	0.113 [0.03]	0.078 [0.02]	
2900 [1368]	0.98	0.96	1.00	0.06 [0.02]	0.39 [0.10]	0.91 [0.23]	0.74 [0.18]	0.117 [0.03]	0.085 [0.02]	
3000 [1416]	0.99	0.97	1.00	0.07 [0.02]	0.43 [0.11]	0.96 [0.24]	0.79 [0.20]	0.122 [0.03]	0.093 [0.02]	
3100 [1463]	1.00	0.99	1.00	0.07 [0.02]	0.47 [0.12]	1.02 [0.25]	0.86 [0.21]	0.127 [0.03]	0.100 [0.02]	
3200 [1510]	1.00	1.00	1.01	0.07 [0.02]	0.51 [0.13]	1.08 [0.27]	0.92 [0.23]	0.132 [0.03]	0.108 [0.03]	
3300 [1557]	1.01	1.02	1.01	0.08 [0.02]	0.54 [0.14]	1.15 [0.29]	0.99 [0.25]	0.137 [0.03]	0.115 [0.03]	
3400 [1604]	1.01	1.03	1.01	0.08 [0.02]	0.58 [0.14]	1.21 [0.30]	1.05 [0.26]	0.142 [0.03]	0.123 [0.03]	
3500 [1652]	1.02	1.05	1.01	0.09 [0.02]	0.62 [0.15]	1.29 [0.32]	1.09 [0.27]	0.147 [0.04]	0.131 [0.03]	
3600 [1699]	1.02	1.06	1.02	0.09 [0.02]	0.66 [0.16]	1.36 [0.34]	1.13 [0.28]	0.152 [0.04]	0.138 [0.03]	

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE—8.5 TON [29.9 kW]—60 Hz—DOWNFLOW

Air Flow CFM [L/s]		External Static Pressure—Inches of Water [kPa]																																						
		0.1 [0.2]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]	0.9 [0.22]	1.0 [0.25]	1.1 [0.27]	1.2 [0.30]	1.3 [0.32]	1.4 [0.35]	1.5 [0.37]	1.6 [0.40]	1.7 [0.42]	1.8 [0.45]	1.9 [0.47]	2.0 [0.50]																			
2700 [127.4]	—	561	894	596	934	631	975	665	1018	698	1062	730	1108	762	1155	793	1203	823	1253	853	1304	882	1357	910	1411	937	1467	964	1524	990	1583	1015	1643	1039	1704	1063	1767	1086	1832	
2800 [132.1]	—	573	927	608	969	642	1013	676	1058	708	1104	740	1152	771	1201	802	1252	832	1304	861	1358	889	1413	917	1470	943	1528	970	1587	995	1648	1020	1711	1044	1775	1067	1840	1090	1907	
2900 [136.8]	—	586	964	620	1008	654	1054	687	1101	719	1150	750	1200	781	1252	811	1305	840	1360	869	1416	897	1473	924	1532	950	1593	976	1654	1001	1718	1025	1782	1048	1848	1071	1916	1093	1985	
3000 [141.6]	564	599	1004	633	1051	666	1099	698	1149	730	1200	761	1253	791	1307	820	1362	849	1419	877	1477	904	1537	931	1598	957	1661	982	1725	1006	1791	1030	1858	1053	1926	1075	1996	1097	2067	
3100 [146.3]	578	1001	612	1048	645	1098	678	1148	710	1200	741	1254	771	1308	801	1365	830	1423	858	1482	886	1542	912	1605	939	1668	964	1733	989	1800	1012	1868	1036	1937	1058	2008	1080	2080	1101	2154
3200 [151.0]	592	1046	625	1096	658	1148	690	1201	721	1255	752	1311	782	1368	811	1427	840	1487	867	1548	894	1611	921	1676	946	1742	971	1809	995	1878	1019	1948	1041	2020	1063	2093	1085	2168	1105	2244
3300 [155.7]	605	1096	638	1148	671	1202	702	1257	733	1314	763	1372	793	1432	821	1493	849	1555	877	1619	903	1684	929	1751	954	1819	979	1899	1002	1960	1025	2033	1047	2107	1069	2182	1090	2259	1110	2337
3400 [160.4]	619	1149	652	1204	684	1260	715	1317	745	1376	775	1437	804	1499	832	1562	860	1627	886	1693	912	1761	938	1830	962	1900	986	1972	1009	2046	1032	2121	1053	2197	1074	2275	1096	2354	1114	2435
3500 [165.2]	634	1206	666	1283	697	1322	728	1382	758	1443	787	1506	815	1570	843	1635	870	1702	896	1771	922	1841	946	1912	970	1985	994	2060	1017	2135	1038	2213	1060	2291	1080	2371	1100	2453	1119	2536
3600 [169.9]	648	1267	680	1326	711	1387	741	1449	770	1513	799	1578	827	1645	854	1713	880	1782	906	1853	931	1925	955	1999	979	2074	1002	2151	1024	2229	1045	2308	1066	2389	1086	2472	1105	2556	1124	2641
3700 [174.6]	663	1332	694	1393	724	1456	754	1521	783	1587	811	1654	838	1723	865	1793	891	1865	916	1938	941	2013	965	2089	988	2167	1010	2246	1032	2326	1053	2408	1073	2491	1092	2576	1111	2662	1129	2750
3800 [179.3]	678	1400	708	1464	738	1529	767	1596	795	1665	823	1734	850	1805	876	1878	902	1952	926	2028	951	2105	974	2183	996	2263	1018	2344	1039	2427	1060	2511	1080	2597	1099	2684	1117	2772	1134	2862
3900 [184.0]	693	1472	723	1538	752	1606	781	1675	808	1746	836	1818	862	1892	888	1966	913	2043	937	2121	961	2200	983	2281	1005	2363	1027	2447	1048	2532	1067	2618	1087	2706	1105	2796	1123	2886	1140	2979
4000 [188.8]	708	1548	737	1617	766	1687	794	1758	822	1831	848	1906	874	1981	900	2059	924	2137	948	2218	971	2299	993	2382	1015	2467	1036	2553	1056	2640	1075	2729	1094	2819	1112	2911	1129	3004	1146	3099
4100 [193.5]	723	1628	752	1699	781	1771	808	1845	835	1920	861	1997	887	2075	911	2155	935	2236	959	2318	981	2402	1003	2488	1024	2574	1045	2663	1064	2752	1083	2844	1101	2936	1119	3030	1136	3126	1152	3223

NOTE: F-Drive left of first bold line. G-Drive between bold lines. H-Drive right of second bold line.

Drive Package	F	G	H
Motor H.P. [W]	2 [1491.4]	3 [2237.1]	3 [2237.1]
Blower Sheave	AK79H	AK79H	AK79H
Motor Sheave	1VP40	1VP50	1VP56
Belt	A49	A50	A51
Turns Open	0	1	2
RPM	804	758	710
		661	616
		559	516
		1003	959
		914	872
		826	826
		1168	1128
		1087	1044
		1002	1002
		957	957

- NOTES:** 1. Factory sheave settings are shown in bold type.
 2. Do not set motor sheave below minimum or maximum turns open shown.
 3. Re-adjustment of sheave required to achieve rated airflow at AHRI minimum External Static Pressure
 4. Drive data shown is for vertical airflow with dry coil. Add component resistance (below) to duct resistance to determine total External Static Pressure.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE—8.5 TON [29.9 kW]—60 Hz—DOWNFLOW (CONTINUED)

Airflow		AIRFLOW CORRECTION FACTORS *			COMPONENT AIRFLOW RESISTANCE				Pressure Drop MERV 8	Pressure Drop MERV 13
CFM [L/s]	Total kBtu/h	Sensible kBtu/h	Power kW	Wet Coil	Vertical Economizer RA Damper Open	Concentric Diffuser RXRN-AEF2000 & Concentric Adapter RXMC-DD01 (Flush)	Concentric Diffuser RXRN-AED2000 & Concentric Adapter RXMC-DD01 (Drop)	Resistance — Inches of Water [kPa]		
2700 [1274]	0.97	0.93	0.99	0.07 [.02]	0.03 [.01]	0.80 [.20]	0.65 [.16]	0.108 [.03]	0.070 [.02]	
2800 [1321]	0.98	0.94	0.99	0.07 [.02]	0.03 [.01]	0.85 [.21]	0.69 [.17]	0.113 [.03]	0.078 [.02]	
2900 [1368]	0.98	0.96	0.99	0.08 [.02]	0.04 [.01]	0.91 [.23]	0.74 [.18]	0.117 [.03]	0.085 [.02]	
3000 [1416]	0.99	0.97	1.00	0.08 [.02]	0.05 [.01]	0.96 [.24]	0.79 [.20]	0.122 [.03]	0.093 [.02]	
3100 [1463]	0.99	0.99	1.00	0.09 [.02]	0.06 [.01]	1.02 [.25]	0.86 [.21]	0.127 [.03]	0.100 [.02]	
3200 [1510]	1.00	1.00	1.00	0.10 [.02]	0.07 [.02]	1.08 [.27]	0.92 [.23]	0.132 [.03]	0.108 [.03]	
3300 [1557]	1.01	1.01	1.00	0.10 [.03]	0.08 [.02]	1.15 [.29]	0.99 [.25]	0.137 [.03]	0.115 [.03]	
3400 [1604]	1.01	1.03	1.01	0.11 [.03]	0.09 [.02]	1.21 [.30]	1.05 [.26]	0.142 [.03]	0.123 [.03]	
3500 [1652]	1.02	1.04	1.01	0.11 [.03]	0.10 [.02]	1.29 [.32]	1.09 [.27]	0.147 [.04]	0.131 [.03]	
3600 [1699]	1.02	1.06	1.01	0.12 [.03]	0.11 [.03]	1.36 [.34]	1.13 [.28]	0.152 [.04]	0.138 [.03]	
3700 [1746]	1.03	1.07	1.02	0.13 [.03]	0.12 [.03]	1.43 [.36]	1.18 [.29]	0.157 [.04]	0.146 [.04]	
3800 [1793]	1.03	1.09	1.02	0.13 [.03]	0.13 [.03]	1.50 [.37]	1.23 [.31]	0.162 [.04]	0.153 [.04]	
3900 [1840]	1.04	1.10	1.02	0.14 [.04]	0.15 [.04]	1.59 [.40]	1.31 [.33]	0.167 [.04]	0.161 [.04]	
4000 [1888]	1.05	1.12	1.02	0.14 [.04]	0.16 [.04]	1.68 [.42]	1.38 [.34]	0.171 [.04]	0.169 [.04]	
4100 [1935]	1.05	1.13	1.03	0.15 [.04]	0.17 [.04]	1.74 [.43]	1.44 [.36]	0.176 [.04]	0.176 [.04]	

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE— 8.5 TON [29.9 kW]—60 Hz—SIDEFLOW

Air Flow CFM [L/s]	Model RGEDYB102 Voltage 208/230, 460, 575 — 3 phase 60 Hz																																							
	External Static Pressure—Inches of Water [kPa]																																							
	0.1 [0.2]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]	0.9 [0.22]	1.0 [0.25]	1.1 [0.27]	1.2 [0.30]	1.3 [0.32]	1.4 [0.35]	1.5 [0.37]	1.6 [0.40]	1.7 [0.42]	1.8 [0.45]	1.9 [0.47]	2.0 [0.50]																				
2700 [127.4]	—	—	577	932	611	969	644	1009	677	1052	710	1098	742	1147	774	1199	806	1254	837	1312	868	1373	898	1437	929	1505	959	1575	988	1648	1017	1725	1046	1804	1074	1886	1102	1972		
2800 [132.1]	—	556	958	601	985	633	1036	666	1079	697	1125	729	1174	760	1227	791	1282	821	1340	851	1402	881	1466	911	1533	940	1604	968	1677	997	1754	1025	1834	1052	1916	1080	2002	1107	2090	
2900 [136.8]	—	568	958	601	995	633	1036	666	1079	697	1125	729	1174	760	1227	791	1282	821	1340	851	1402	881	1466	911	1533	940	1604	968	1677	997	1754	1025	1834	1052	1916	1080	2002	1107	2090	
3000 [141.6]	—	580	994	613	1033	645	1074	676	1119	708	1167	738	1218	769	1272	799	1329	829	1389	859	1452	888	1518	917	1587	945	1659	973	1734	1001	1812	1029	1894	1056	1978	1082	2065	1109	2155	
3100 [146.3]	561	996	593	1033	624	1073	656	1117	687	1163	718	1213	748	1265	778	1321	808	1379	837	1441	866	1506	895	1573	923	1644	951	1718	978	1794	1006	1874	1033	1957	1059	2043	1085	2132	1111	2224
3200 [151.0]	574	1037	605	1076	636	1118	667	1163	698	1211	728	1262	758	1316	787	1373	816	1434	845	1497	873	1563	902	1632	929	1705	957	1780	984	1858	1010	1940	1037	2024	1063	2112	1088	2202	1113	2296
3300 [155.7]	587	1082	618	1122	648	1166	679	1212	709	1262	738	1315	767	1371	796	1430	825	1491	853	1556	881	1624	908	1695	936	1769	962	1846	989	1926	1015	2009	1041	2095	1066	2184	1091	2276	1116	2372
3400 [160.4]	600	1130	630	1172	660	1217	690	1266	720	1317	749	1371	777	1429	806	1489	834	1553	861	1619	888	1689	915	1761	942	1837	968	1916	994	1997	1020	2082	1045	2170	1070	2260	1094	2354	1118	2451
3500 [165.2]	613	1182	643	1226	672	1273	702	1323	730	1376	759	1432	787	1491	815	1553	842	1618	869	1686	896	1757	922	1831	948	1909	974	1989	999	2072	1024	2158	1049	2248	1073	2340	1097	2436	1121	2534
3600 [169.9]	626	1238	656	1283	685	1332	713	1383	741	1438	769	1495	797	1556	824	1620	851	1687	877	1756	904	1829	929	1905	955	1984	980	2066	1005	2151	1029	2238	1053	2329	1077	2423	1100	2520	1123	2621
3700 [174.6]	640	1297	668	1344	697	1394	725	1447	753	1504	780	1563	807	1625	833	1690	860	1759	886	1830	911	1905	937	1982	961	2063	986	2146	1010	2233	1034	2322	1057	2415	1081	2510	1103	2609	1129	2711
3800 [179.3]	653	1360	681	1409	709	1460	737	1515	764	1573	790	1634	817	1698	843	1765	869	1835	894	1908	919	1984	944	2063	968	2145	992	2230	1016	2318	1039	2410	1062	2504	1084	2601	1107	2701	1129	2805
3900 [184.0]	667	1426	694	1471	721	1530	748	1587	775	1646	801	1709	827	1774	852	1843	878	1914	902	1989	927	2067	951	2147	975	2231	998	2318	1021	2408	1044	2500	1066	2596	1088	2695	1110	2797	1131	2902
4000 [188.8]	680	1496	707	1548	734	1604	760	1662	786	1723	812	1787	837	1854	862	1924	887	1998	911	2074	935	2153	958	2235	981	2321	1004	2409	1027	2501	1049	2595	1071	2693	1092	2793	1113	2897	1134	3003
4100 [193.5]	694	1570	720	1624	746	1681	772	1740	797	1803	822	1869	847	1938	872	2009	896	2084	919	2162	943	2243	965	2327	988	2414	1010	2504	1032	2597	1054	2693	1075	2792	1096	2895	1116	3000	1137	3108

NOTE: F-Drive left of first bold line, G-Drive between bold lines, H-Drive right of second bold line.

Drive Package	F					G					H														
Motor H.P. [W]	2 [1491.4]					3 [2237.1]					3 [2237.1]														
Blower Sheave	AK79H					AK79H					AK79H														
Motor Sheave	1VP40					1VP50					1VP56														
Belt	A49					A50					A51														
Turns Open	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5	
RPM	802	754	707	662	616	555	1048	1005	960	916	870	827	780	737	694	651	608	565	522	479	436	393	350	307	264

- NOTES:** 1. Factory sheave settings are shown in bold type.
 2. Do not set motor sheave below minimum or maximum turns open shown.
 3. Re-adjustment of sheave required to achieve rated airflow at AHRI minimum External Static Pressure
 4. Add component resistance (below) to duct resistance to determine total External Static Pressure.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE—8.5 TON [29.9 kW]—60 Hz—SIDEFLOW (CONTINUED)

Airflow CFM [L/s]	AIRFLOW CORRECTION FACTORS *			COMPONENT AIRFLOW RESISTANCE					Pressure Drop MERV 8	Pressure Drop MERV 13
	Total kBtu/h	Sensible kBtu/h	Power kW	Wet Coil	Horizontal Economizer RA Damper Open	Concentric Diffuser RXRN-AEF2000 & Concentric Adapter RXMC-DD01 (Flush)	Concentric Diffuser RXRN-AED2000 & Concentric Adapter RXMC-DD01 (Drop)	Resistance — Inches of Water [kPa]		
2700 [1274]	0.97	0.93	0.99	0.07 [.02]	0.32 [0.08]	0.80 [.20]	0.65 [.16]	0.108 [.03]	0.070 [.02]	
2800 [1321]	0.98	0.94	0.99	0.07 [.02]	0.36 [0.09]	0.85 [.21]	0.69 [.17]	0.113 [.03]	0.078 [.02]	
2900 [1368]	0.98	0.96	0.99	0.08 [.02]	0.39 [0.10]	0.91 [.23]	0.74 [.18]	0.117 [.03]	0.085 [.02]	
3000 [1416]	0.99	0.97	1.00	0.08 [.02]	0.43 [0.11]	0.96 [.24]	0.79 [.20]	0.122 [.03]	0.093 [.02]	
3100 [1463]	0.99	0.99	1.00	0.09 [.02]	0.47 [0.12]	1.02 [.25]	0.86 [.21]	0.127 [.03]	0.100 [.02]	
3200 [1510]	1.00	1.00	1.00	0.10 [.02]	0.51 [0.13]	1.08 [.27]	0.92 [.23]	0.132 [.03]	0.108 [.03]	
3300 [1557]	1.01	1.01	1.00	0.10 [.03]	0.54 [0.14]	1.15 [.29]	0.99 [.25]	0.137 [.03]	0.115 [.03]	
3400 [1604]	1.01	1.03	1.01	0.11 [.03]	0.58 [0.14]	1.21 [.30]	1.05 [.26]	0.142 [.03]	0.123 [.03]	
3500 [1652]	1.02	1.04	1.01	0.11 [.03]	0.62 [0.15]	1.29 [.32]	1.09 [.27]	0.147 [.04]	0.131 [.03]	
3600 [1699]	1.02	1.06	1.01	0.12 [.03]	0.66 [0.16]	1.36 [.34]	1.13 [.28]	0.152 [.04]	0.138 [.03]	
3700 [1746]	1.03	1.07	1.02	0.13 [.03]	0.70 [0.17]	1.43 [.36]	1.18 [.29]	0.157 [.04]	0.146 [.04]	
3800 [1793]	1.03	1.09	1.02	0.13 [.03]	0.74 [0.18]	1.50 [.37]	1.23 [.31]	0.162 [.04]	0.153 [.04]	
3900 [1840]	1.04	1.10	1.02	0.14 [.04]	0.77 [0.19]	1.59 [.40]	1.31 [.33]	0.167 [.04]	0.161 [.04]	
4000 [1888]	1.05	1.12	1.02	0.15 [.04]	0.81 [0.20]	1.68 [.42]	1.38 [.34]	0.171 [.04]	0.169 [.04]	
4100 [1935]	1.05	1.13	1.03	0.15 [.04]	0.85 [0.21]	1.74 [.43]	1.44 [.36]	0.176 [.04]	0.176 [.04]	

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE— 10 TON [35.1 kW]—60 Hz—DOWNFLOW (CONTINUED)

Airflow CFM [L/s]	AIRFLOW CORRECTION FACTORS *			COMPONENT AIRFLOW RESISTANCE					Pressure Drop MERV 8	Pressure Drop MERV 13
	Total kBtu/h	Sensible kBtu/h	Power kW	Wet Coil	Vertical Economizer RA Damper Open	Concentric Diffuser RXRN-AEF3415 & Concentric Adapter RXMC-DD02 (Flush)	Concentric Diffuser RXRN-AED3415 & Concentric Adapter RXMC-DD02 (Drop)	Resistance — Inches of Water [kPa]		
3200 [1510]	0.97	0.93	0.99	0.10 [.02]	0.07 [.02]	0.74 [.18]	0.56 [.14]	0.132 [.03]	0.108 [.03]	
3300 [1557]	0.98	0.94	0.99	0.10 [.03]	0.08 [.02]	0.79 [.20]	0.59 [.15]	0.137 [.03]	0.115 [.03]	
3400 [1604]	0.98	0.96	0.99	0.11 [.03]	0.09 [.02]	0.84 [.21]	0.62 [.15]	0.142 [.03]	0.123 [.03]	
3500 [1652]	0.99	0.97	1.00	0.11 [.03]	0.10 [.02]	0.90 [.22]	0.66 [.16]	0.147 [.04]	0.131 [.03]	
3600 [1699]	0.99	0.98	1.00	0.12 [.03]	0.11 [.03]	0.95 [.24]	0.69 [.17]	0.152 [.04]	0.138 [.03]	
3700 [1746]	1.00	0.99	1.00	0.13 [.03]	0.12 [.03]	1.00 [.25]	0.73 [.18]	0.157 [.04]	0.146 [.04]	
3800 [1793]	1.00	1.01	1.00	0.13 [.03]	0.13 [.03]	1.04 [.26]	0.76 [.19]	0.162 [.04]	0.153 [.04]	
3900 [1840]	1.01	1.02	1.00	0.14 [.04]	0.15 [.04]	1.09 [.27]	0.80 [.20]	0.167 [.04]	0.161 [.04]	
4000 [1888]	1.01	1.03	1.01	0.15 [.04]	0.16 [.04]	1.13 [.28]	0.84 [.21]	0.171 [.04]	0.169 [.04]	
4100 [1935]	1.02	1.04	1.01	0.15 [.04]	0.17 [.04]	1.19 [.30]	0.88 [.22]	0.176 [.04]	0.176 [.04]	
4200 [1982]	1.02	1.06	1.01	0.16 [.04]	0.19 [.05]	1.24 [.31]	0.92 [.23]	0.181 [.04]	0.184 [.05]	
4300 [2029]	1.03	1.07	1.01	0.17 [.04]	0.20 [.05]	1.31 [.33]	0.97 [.24]	0.186 [.05]	0.191 [.05]	
4400 [2076]	1.03	1.08	1.01	0.18 [.04]	0.21 [.05]	1.37 [.34]	1.02 [.25]	0.191 [.05]	0.199 [.05]	
4500 [2123]	1.04	1.09	1.02	0.19 [.05]	0.23 [.06]	1.43 [.35]	1.07 [.27]	0.196 [.05]	0.207 [.05]	
4600 [2171]	1.04	1.11	1.02	0.19 [.05]	0.24 [.06]	1.48 [.37]	1.11 [.28]	0.201 [.05]	0.214 [.05]	
4700 [2218]	1.05	1.12	1.02	0.20 [.05]	0.26 [.06]	1.54 [.38]	1.15 [.29]	0.206 [.05]	0.222 [.05]	
4800 [2265]	1.05	1.13	1.02	0.21 [.05]	0.28 [.07]	1.59 [.40]	1.19 [.30]	0.211 [.05]	0.229 [.06]	

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE— 10 TON [35.1 kW]—60 HZ—SIDEFLOW (CONTINUED)

Airflow	AIRFLOW CORRECTION FACTORS *			COMPONENT AIRFLOW RESISTANCE					Pressure Drop MERV 8	Pressure Drop MERV 13
	CFM [L/s]	Total kBtu/h	Sensible kBtu/h	Power kW	Wet Coil	Horizontal Economizer RA Damper Open	Concentric Diffuser RXRN-AEF3415 & Concentric Adapter RXWMC-DD02 (Flush)	Concentric Diffuser RXRN-AED3415 & Concentric Adapter RXWMC-DD02 (Drop)		
Resistance — Inches of Water [kPa]										
3200 [1510]	0.97	0.93	0.99	0.10 [0.02]	0.51 [0.13]	0.74 [0.18]	0.56 [0.14]	0.132 [0.03]	0.108 [0.03]	
3300 [1557]	0.98	0.94	0.99	0.10 [0.03]	0.54 [0.14]	0.79 [0.20]	0.59 [0.15]	0.137 [0.03]	0.115 [0.03]	
3400 [1604]	0.98	0.96	0.99	0.11 [0.03]	0.58 [0.14]	0.84 [0.21]	0.62 [0.15]	0.142 [0.03]	0.123 [0.03]	
3500 [1652]	0.99	0.97	1.00	0.11 [0.03]	0.62 [0.15]	0.90 [0.22]	0.66 [0.16]	0.147 [0.04]	0.131 [0.03]	
3600 [1699]	0.99	0.98	1.00	0.12 [0.03]	0.66 [0.16]	0.95 [0.24]	0.69 [0.17]	0.152 [0.04]	0.138 [0.03]	
3700 [1746]	1.00	0.99	1.00	0.13 [0.03]	0.70 [0.17]	1.00 [0.25]	0.73 [0.18]	0.157 [0.04]	0.146 [0.04]	
3800 [1793]	1.00	1.01	1.00	0.13 [0.03]	0.74 [0.18]	1.04 [0.26]	0.76 [0.19]	0.162 [0.04]	0.153 [0.04]	
3900 [1840]	1.01	1.02	1.00	0.14 [0.04]	0.77 [0.19]	1.09 [0.27]	0.80 [0.20]	0.167 [0.04]	0.161 [0.04]	
4000 [1888]	1.01	1.03	1.01	0.15 [0.04]	0.81 [0.20]	1.13 [0.28]	0.84 [0.21]	0.171 [0.04]	0.169 [0.04]	
4100 [1935]	1.02	1.04	1.01	0.15 [0.04]	0.85 [0.21]	1.19 [0.30]	0.88 [0.22]	0.176 [0.04]	0.176 [0.04]	
4200 [1982]	1.02	1.06	1.01	0.16 [0.04]	0.89 [0.22]	1.24 [0.31]	0.92 [0.23]	0.181 [0.04]	0.184 [0.05]	
4300 [2029]	1.03	1.07	1.01	0.17 [0.04]	0.93 [0.23]	1.31 [0.33]	0.97 [0.24]	0.186 [0.05]	0.191 [0.05]	
4400 [2076]	1.03	1.08	1.01	0.18 [0.04]	0.97 [0.24]	1.37 [0.34]	1.02 [0.25]	0.191 [0.05]	0.199 [0.05]	
4500 [2123]	1.04	1.09	1.02	0.19 [0.05]	1.01 [0.25]	1.43 [0.35]	1.07 [0.27]	0.196 [0.05]	0.207 [0.05]	
4600 [2171]	1.04	1.11	1.02	0.19 [0.05]	1.06 [0.26]	1.48 [0.37]	1.11 [0.28]	0.201 [0.05]	0.214 [0.05]	
4700 [2218]	1.05	1.12	1.02	0.20 [0.05]	1.10 [0.27]	1.54 [0.38]	1.15 [0.29]	0.206 [0.05]	0.222 [0.05]	
4800 [2265]	1.05	1.13	1.02	0.21 [0.05]	1.14 [0.28]	1.59 [0.40]	1.19 [0.30]	0.211 [0.05]	0.229 [0.06]	

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE— 12.5 TON [43.9 kW]—60 Hz—DOWNFLOW (CONTINUED)

Airflow CFM [L/s]	AIRFLOW CORRECTION FACTORS *			COMPONENT AIRFLOW RESISTANCE					Pressure Drop MERV 13	
	Total kBtu/h	Sensible kBtu/h	Power kW	Wet Coil	Vertical Economizer RA Damper Open	Concentric Diffuser RXRN-AEF3618 & Concentric Adapter RXMC-DD03 (Flush)	Concentric Diffuser RXRN-AED3618 & Concentric Adapter RXMC-DD03 (Drop)	Pressure Drop MERV 8		
Resistance — Inches of Water [kPa]										
4000 [1888]	1.01	1.03	1.01	0.15 [0.04]	0.16 [0.04]	0.76 [1.19]	0.68 [1.17]	0.132 [0.03]	0.108 [0.03]	
4100 [1935]	1.02	1.04	1.01	0.16 [0.04]	0.17 [0.04]	0.79 [1.20]	0.72 [1.18]	0.136 [0.03]	0.114 [0.03]	
4200 [1982]	1.02	1.06	1.01	0.17 [0.04]	0.19 [0.05]	0.82 [1.20]	0.75 [1.19]	0.140 [0.03]	0.120 [0.03]	
4300 [2029]	1.03	1.07	1.01	0.17 [0.04]	0.20 [0.05]	0.86 [1.21]	0.79 [1.20]	0.144 [0.03]	0.126 [0.03]	
4400 [2076]	1.03	1.08	1.01	0.18 [0.05]	0.21 [0.05]	0.90 [1.22]	0.83 [1.21]	0.148 [0.04]	0.132 [0.03]	
4500 [2123]	1.04	1.09	1.02	0.19 [0.05]	0.23 [0.06]	0.94 [1.23]	0.86 [1.21]	0.152 [0.04]	0.138 [0.03]	
4600 [2171]	1.04	1.11	1.02	0.20 [0.05]	0.24 [0.06]	0.98 [1.24]	0.89 [1.22]	0.156 [0.04]	0.145 [0.04]	
4700 [2218]	1.05	1.12	1.02	0.21 [0.05]	0.26 [0.06]	1.02 [1.25]	0.94 [1.23]	0.160 [0.04]	0.151 [0.04]	
4800 [2265]	1.05	1.13	1.02	0.21 [0.05]	0.28 [0.07]	1.06 [1.26]	0.98 [1.24]	0.164 [0.04]	0.157 [0.04]	
4900 [2312]	1.06	1.14	1.02	0.22 [0.06]	0.29 [0.07]	1.10 [1.27]	1.01 [1.25]	0.168 [0.04]	0.163 [0.04]	
5000 [2359]	1.06	1.16	1.03	0.23 [0.06]	0.31 [0.08]	1.14 [1.28]	1.04 [1.26]	0.172 [0.04]	0.169 [0.04]	
5100 [2407]	1.07	1.17	1.03	0.24 [0.06]	0.33 [0.08]	1.18 [1.29]	1.07 [1.27]	0.176 [0.04]	0.175 [0.04]	
5200 [2454]	1.07	1.18	1.03	0.25 [0.06]	0.35 [0.09]	1.22 [1.30]	1.10 [1.27]	0.180 [0.04]	0.182 [0.04]	
5300 [2501]	1.08	1.19	1.03	0.26 [0.06]	0.36 [0.09]	1.27 [1.32]	1.15 [1.29]	0.184 [0.05]	0.188 [0.05]	
5400 [2548]	1.08	1.21	1.03	0.27 [0.07]	0.38 [0.09]	1.33 [1.33]	1.20 [1.30]	0.188 [0.05]	0.194 [0.05]	
5500 [2595]	1.09	1.22	1.04	0.28 [0.07]	0.40 [1.10]	1.37 [1.34]	1.25 [1.31]	0.192 [0.05]	0.200 [0.05]	
5600 [2643]	1.09	1.23	1.04	0.29 [0.07]	0.42 [1.10]	1.42 [1.35]	1.30 [1.32]	0.196 [0.05]	0.206 [0.05]	
5700 [2690]	1.10	1.24	1.04	0.30 [0.07]	0.44 [1.11]	1.47 [1.37]	1.34 [1.33]	0.200 [0.05]	0.212 [0.05]	
5800 [2737]	1.10	1.26	1.04	0.31 [0.08]	0.46 [1.11]	1.52 [1.38]	1.38 [1.34]	0.204 [0.05]	0.219 [0.05]	
5900 [2784]	1.10	1.27	1.05	0.32 [0.08]	0.48 [1.12]	1.56 [1.39]	1.42 [1.35]	0.208 [0.05]	0.225 [0.05]	
6000 [2831]	1.11	1.28	1.05	0.33 [0.08]	0.51 [1.13]	1.60 [1.40]	1.45 [1.36]	0.212 [0.05]	0.231 [0.06]	

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE— 12.5 TON [43.9 kW]—60 Hz—SIDEFLOW (CONTINUED)

Airflow		AIRFLOW CORRECTION FACTORS *			COMPONENT AIRFLOW RESISTANCE				Pressure Drop MERV 8	Pressure Drop MERV 13
CFM [L/s]	Total kBtu/h	Sensible kBtu/h	Power kW	Wet Coil	Vertical Economizer RA Damper Open	Concentric Diffuser RXRN-AEF3618 & Concentric Adapter RXMC-DD03 (Flush)	Concentric Diffuser RXRN-AED3618 & Concentric Adapter RXMC-DD03 (Drop)	Resistance — Inches of Water [kPa]	Pressure Drop MERV 8	Pressure Drop MERV 13
4000 [1888]	1.01	1.03	1.01	0.15 [0.04]	0.73 [0.18]	0.76 [0.19]	0.68 [0.17]	0.132 [0.03]	0.132 [0.03]	0.108 [0.03]
4100 [1935]	1.02	1.04	1.01	0.16 [0.04]	0.78 [0.19]	0.79 [0.20]	0.72 [0.18]	0.136 [0.03]	0.136 [0.03]	0.114 [0.03]
4200 [1982]	1.02	1.06	1.01	0.17 [0.04]	0.83 [0.21]	0.82 [0.20]	0.75 [0.19]	0.140 [0.03]	0.140 [0.03]	0.120 [0.03]
4300 [2029]	1.03	1.07	1.01	0.17 [0.04]	0.88 [0.22]	0.86 [0.21]	0.79 [0.20]	0.144 [0.03]	0.144 [0.03]	0.126 [0.03]
4400 [2076]	1.03	1.08	1.01	0.18 [0.05]	0.93 [0.23]	0.90 [0.22]	0.83 [0.21]	0.148 [0.04]	0.148 [0.04]	0.132 [0.03]
4500 [2123]	1.04	1.09	1.02	0.19 [0.05]	0.98 [0.24]	0.94 [0.23]	0.86 [0.21]	0.152 [0.04]	0.152 [0.04]	0.138 [0.03]
4600 [2171]	1.04	1.11	1.02	0.20 [0.05]	1.03 [0.26]	0.98 [0.24]	0.89 [0.22]	0.156 [0.04]	0.156 [0.04]	0.145 [0.04]
4700 [2218]	1.05	1.12	1.02	0.21 [0.05]	1.07 [0.27]	1.02 [0.25]	0.94 [0.23]	0.160 [0.04]	0.160 [0.04]	0.151 [0.04]
4800 [2265]	1.05	1.13	1.02	0.21 [0.05]	1.12 [0.28]	1.06 [0.26]	0.98 [0.24]	0.164 [0.04]	0.164 [0.04]	0.157 [0.04]
4900 [2312]	1.06	1.14	1.02	0.22 [0.06]	1.17 [0.29]	1.10 [0.27]	1.01 [0.25]	0.168 [0.04]	0.168 [0.04]	0.163 [0.04]
5000 [2359]	1.06	1.16	1.03	0.23 [0.06]	1.21 [0.30]	1.14 [0.28]	1.04 [0.26]	0.172 [0.04]	0.172 [0.04]	0.169 [0.04]
5100 [2407]	1.07	1.17	1.03	0.24 [0.06]	1.26 [0.31]	1.18 [0.29]	1.07 [0.27]	0.176 [0.04]	0.176 [0.04]	0.175 [0.04]
5200 [2454]	1.07	1.18	1.03	0.25 [0.06]	1.30 [0.32]	1.22 [0.30]	1.10 [0.27]	0.180 [0.04]	0.180 [0.04]	0.182 [0.04]
5300 [2501]	1.08	1.19	1.03	0.26 [0.06]	1.35 [0.34]	1.27 [0.32]	1.15 [0.29]	0.184 [0.05]	0.184 [0.05]	0.188 [0.05]
5400 [2548]	1.08	1.21	1.03	0.27 [0.07]	1.39 [0.35]	1.33 [0.33]	1.20 [0.30]	0.188 [0.05]	0.188 [0.05]	0.194 [0.05]
5500 [2595]	1.09	1.22	1.04	0.28 [0.07]	1.44 [0.36]	1.37 [0.34]	1.25 [0.31]	0.192 [0.05]	0.192 [0.05]	0.200 [0.05]
5600 [2643]	1.09	1.23	1.04	0.29 [0.07]	1.48 [0.37]	1.42 [0.35]	1.30 [0.32]	0.196 [0.05]	0.196 [0.05]	0.206 [0.05]
5700 [2690]	1.10	1.24	1.04	0.30 [0.07]	1.52 [0.38]	1.47 [0.37]	1.34 [0.33]	0.200 [0.05]	0.200 [0.05]	0.212 [0.05]
5800 [2737]	1.10	1.26	1.04	0.31 [0.08]	1.57 [0.39]	1.52 [0.38]	1.38 [0.34]	0.204 [0.05]	0.204 [0.05]	0.219 [0.05]
5900 [2784]	1.10	1.27	1.05	0.32 [0.08]	1.61 [0.40]	1.56 [0.39]	1.42 [0.35]	0.208 [0.05]	0.208 [0.05]	0.225 [0.05]
6000 [2831]	1.11	1.28	1.05	0.33 [0.08]	1.65 [0.41]	1.60 [0.40]	1.45 [0.36]	0.212 [0.05]	0.212 [0.05]	0.231 [0.06]

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

ELECTRICAL DATA – RGEDYB SERIES

		090ACF15 090ACF20	090ACG15 090ACG20 090ACH15 090ACH20	090ADF15 090ADF20	090ADG15 090ADG20 090ADH15 090ADH20	090AYF15 090AYF20	090AYG15 090AYG20 090AYH15 090AYH20
Unit Information	Unit Operating Voltage Range	187-253	187-253	414-506	414-506	518-633	518-633
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Hz	60	60	60	60	60	60
	Minimum Circuit Ampacity	41/41	44/44	18	20	15	16
	Minimum Circuit Ampacity with Power Exhaust	46/46	49/49	21	23	17	18
	Minimum Overcurrent Protection Device Size	50/50	50/50	25	25	20	20
	Minimum Overcurrent Protection Device Size with Power Exhaust	60/60	60/60	25	25	20	20
	Maximum Overcurrent Protection Device Size	60/60	60/60	25	30	20	20
	Maximum Overcurrent Protection Device Size with Power Exhaust	70/70	70/70	30	30	25	25
Compressor Motor	No.	1	1	1	1	1	1
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Amps (RLA), Comp. 1	25.2	25.2	10.6	10.6	8.6	8.6
	Amps (LRA), Comp. 1	178.5	178.5	79.1	79.1	65.0	65.0
Condenser Motor	No.	2	2	2	2	2	2
	Volts	208/230	208/230	460	460	575	575
	Phase	1	1	1	1	1	1
	HP	1/5	1/5	1/5	1/5	1/5	1/5
	Amps (FLA, each)	1.2	1.2	0.8	0.8	0.6	0.6
	Amps (LRA, each)	2.3	2.3	1.4	1.4	1.1	1.1
Evaporator Fan	No.	1	1	1	1	1	1
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	HP	2	3	2	3	2	3
	Amps (FLA, each)	6.2	9.2	3.0	4.6	2.4	3.5
	Amps (LRA, each)	47.0	74.5	24.0	38.1	19.0	30.0

ELECTRICAL DATA – RGEDYB SERIES

		102ACF15 102ACF22	102ACG15 102ACG22 102ACH15 102ACH22	102ADF15 102ADF22	102ADG15 102ADG22 102ADH15 102ADH22	102AYF15 102AYF22	102AYG15 102AYG22 102AYH15 102AYH22
Unit Information	Unit Operating Voltage Range	187-253	187-253	414-506	414-506	518-633	518-633
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Hz	60	60	60	60	60	60
	Minimum Circuit Ampacity	43/43	46/46	21	22	16	17
	Minimum Circuit Ampacity with Power Exhaust	48/48	51/51	23	25	18	19
	Minimum Overcurrent Protection Device Size	50/50	60/60	25	25	20	20
	Minimum Overcurrent Protection Device Size with Power Exhaust	60/60	60/60	30	30	20	25
	Maximum Overcurrent Protection Device Size	60/60	70/70	30	30	20	25
	Maximum Overcurrent Protection Device Size with Power Exhaust	70/70	70/70	35	35	25	25
Compressor Motor	No.	1	1	1	1	1	1
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Amps (RLA), Comp. 1	26.8	26.8	12.5	12.5	9.4	9.4
	Amps (LRA), Comp. 1	190.7	190.7	100.2	100.2	65.0	65.0
Condenser Motor	No.	2	2	2	2	2	2
	Volts	208/230	208/230	460	460	575	575
	Phase	1	1	1	1	1	1
	HP	1/5	1/5	1/5	1/5	1/5	1/5
	Amps (FLA, each)	1.2	1.2	0.8	0.8	0.6	0.6
	Amps (LRA, each)	2.3	2.3	1.4	1.4	1.1	1.1
Evaporator Fan	No.	1	1	1	1	1	1
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	HP	2	3	2	3	2	3
	Amps (FLA, each)	6.2	9.2	3.0	4.6	2.4	3.5
	Amps (LRA, each)	47.0	74.5	24.0	38.1	19.0	30.0

ELECTRICAL DATA – RGEDYB SERIES



		120ACF15 120ACF22	120ACG15 120ACG22 120ACH15 120ACH22	120ADF15 120ADF22	120ADG15 120ADG22 120ADH15 120ADH22	120AYF15 120AYF22	120AYG15 120AYG22 120AYH15 120AYH22
Unit Information	Unit Operating Voltage Range	187-253	187-253	414-506	414-506	518-633	518-633
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Hz	60	60	60	60	60	60
	Minimum Circuit Ampacity	45/45	48/48	24	25	19	20
	Minimum Circuit Ampacity with Power Exhaust	50/50	53/53	26	28	21	22
	Minimum Overcurrent Protection Device Size	60/60	60/60	30	30	25	25
	Minimum Overcurrent Protection Device Size with Power Exhaust	60/60	60/60	30	35	25	25
	Maximum Overcurrent Protection Device Size	70/70	70/70	35	35	30	30
	Maximum Overcurrent Protection Device Size with Power Exhaust	70/70	70/70	35	40	30	30
Compressor Motor	No.	1	1	1	1	1	1
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Amps (RLA), Comp. 1	26.5	26.5	14.0	14.0	11.5	11.5
	Amps (LRA), Comp. 1	255.0	255.0	123.0	123.0	93.7	93.7
Condenser Motor	No.	2	2	2	2	2	2
	Volts	208/230	208/230	460	460	575	575
	Phase	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA, each)	2.4	2.4	1.4	1.4	1.0	1.0
	Amps (LRA, each)	4.7	4.7	2.4	2.4	4.7	4.7
Evaporator Fan	No.	1	1	1	1	1	1
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	HP	2	3	2	3	2	3
	Amps (FLA, each)	6.2	9.2	3.0	4.6	2.4	3.5
	Amps (LRA, each)	47.0	74.5	24.0	38.1	19.0	30.0

ELECTRICAL DATA – RGEDYB SERIES

		150ACF15 150ACF22	150ACG15 150ACG22	150ADF15 150ADF22	150ADG15 150ADG22	150AYF15 150AYF22	150AYG15 150AYG22
Unit Information	Unit Operating Voltage Range	187-253	187-253	414-506	414-506	518-633	518-633
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Hz	60	60	60	60	60	60
	Minimum Circuit Ampacity	68/68	75/75	29	31	23	24
	Minimum Circuit Ampacity with Power Exhaust	74/74	80/80	32	34	25	26
	Minimum Overcurrent Protection Device Size	80/80	90/90	35	35	25	30
	Minimum Overcurrent Protection Device Size with Power Exhaust	80/80	90/90	35	40	30	30
	Maximum Overcurrent Protection Device Size	90/90	90/90	35	35	25	30
	Maximum Overcurrent Protection Device Size with Power Exhaust	90/90	100/100	40	40	30	30
Compressor Motor	No.	2	2	2	2	2	2
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Amps (RLA), Comp. 1	22.4	22.4	8.8	8.8	7.2	7.2
	Amps (LRA), Comp. 1	166.2	166.2	74.6	74.6	54.0	54.0
	Amps (RLA), Comp. 2	22.4	22.4	8.8	8.8	7.2	7.2
	Amps (LRA), Comp. 2	166.2	166.2	74.6	74.6	54.0	54.0
Condenser Motor	No.	2	2	2	2	2	2
	Volts	208/230	208/230	460	460	575	575
	Phase	1	1	1	1	1	1
	HP	3/4	3/4	3/4	3/4	3/4	3/4
	Amps (FLA, each)	4.2	4.2	2.3	2.3	1.2	1.2
	Amps (LRA, each)	11.5	11.5	5.9	5.9	4.2	4.2
	Evaporator Fan	No.	1	1	1	1	1
Volts		208/230	208/230	460	460	575	575
Phase		3	3	3	3	3	3
HP		3	5	3	5	3	5
Amps (FLA, each)		9.2	15.7	4.6	6.3	3.5	5.1
Amps (LRA, each)		74.5	95.0	38.1	47.5	30.0	38.0


A2L REFRIGERANT INSTALLATION SAFETY DATA

		RGEDYB090	RGEDYB102	RGEDYB120	RGEDYB150	RGEDYB090 w/HumidiDry	RGEDYB102 w/HumidiDry	RGEDYB120 w/HumidiDry	RGEDYB150 w/HumidiDry
Refrigerant Charge		88	113.6	171.2	168	120	152	210.4	214.4
Minimum circulation		293	378	569	559	399	506	700	713
Altitude above Sea Level (ft)	Altitude Adjustment Factor	Minimum Total Space Area, T _{Amin} (Sq. Ft.)							
0	1.000	162	209	316	310	221	280	388	395
1000	1.025	166	215	323	317	227	287	398	405
2000	1.051	170	220	332	325	232	294	408	415
3000	1.078	175	226	340	334	238	302	418	426
4000	1.107	180	232	349	343	245	310	429	437
5000	1.138	185	238	359	352	252	319	441	450
6000	1.170	190	245	369	362	259	328	454	462
6500	1.187	193	249	375	368	263	333	460	469

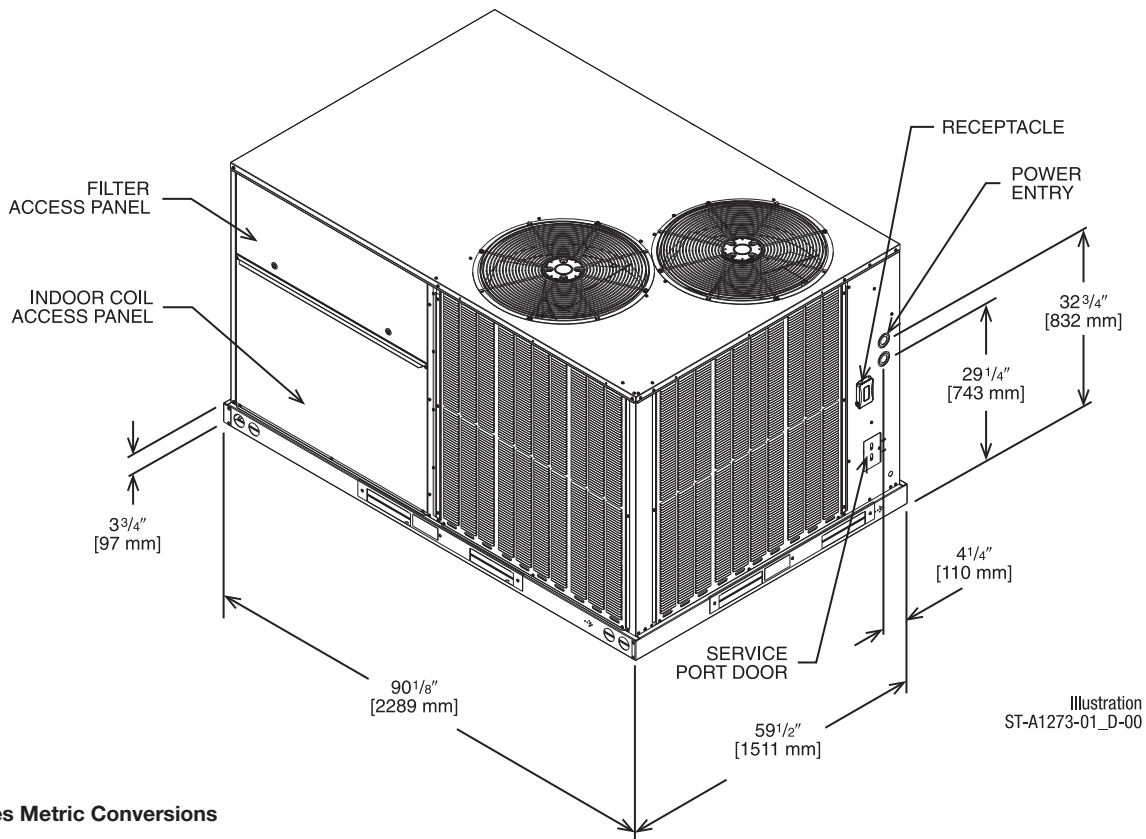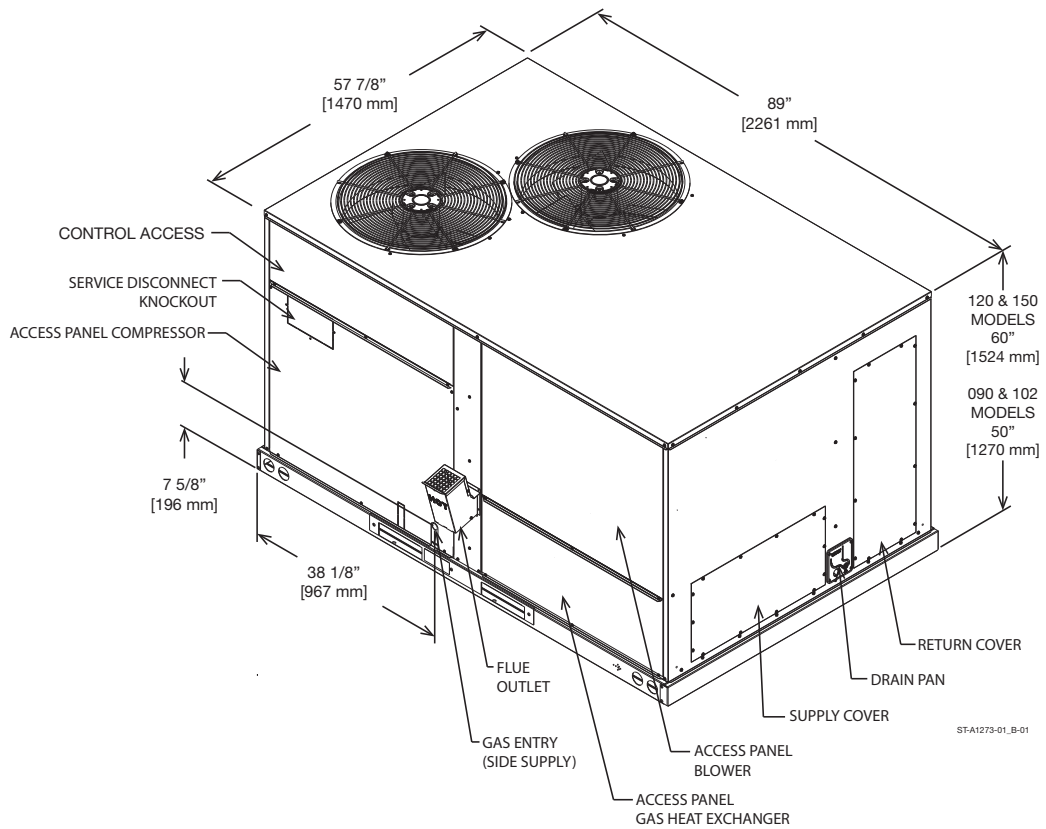


[] Designates Metric Conversions

SUPPLY AND RETURN DIMENSIONS FOR HORIZONTAL APPLICATIONS

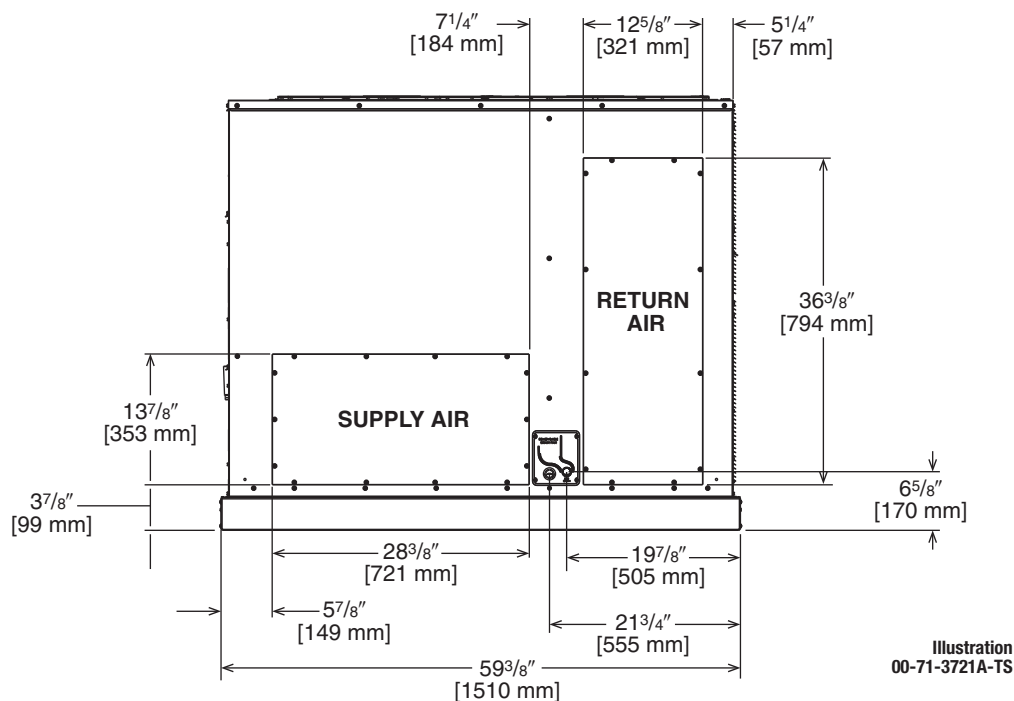

**SUPPLY AND RETURN DIMENSIONS FOR DOWNFLOW APPLICATIONS
(VIEW FROM BOTTOM UP)**

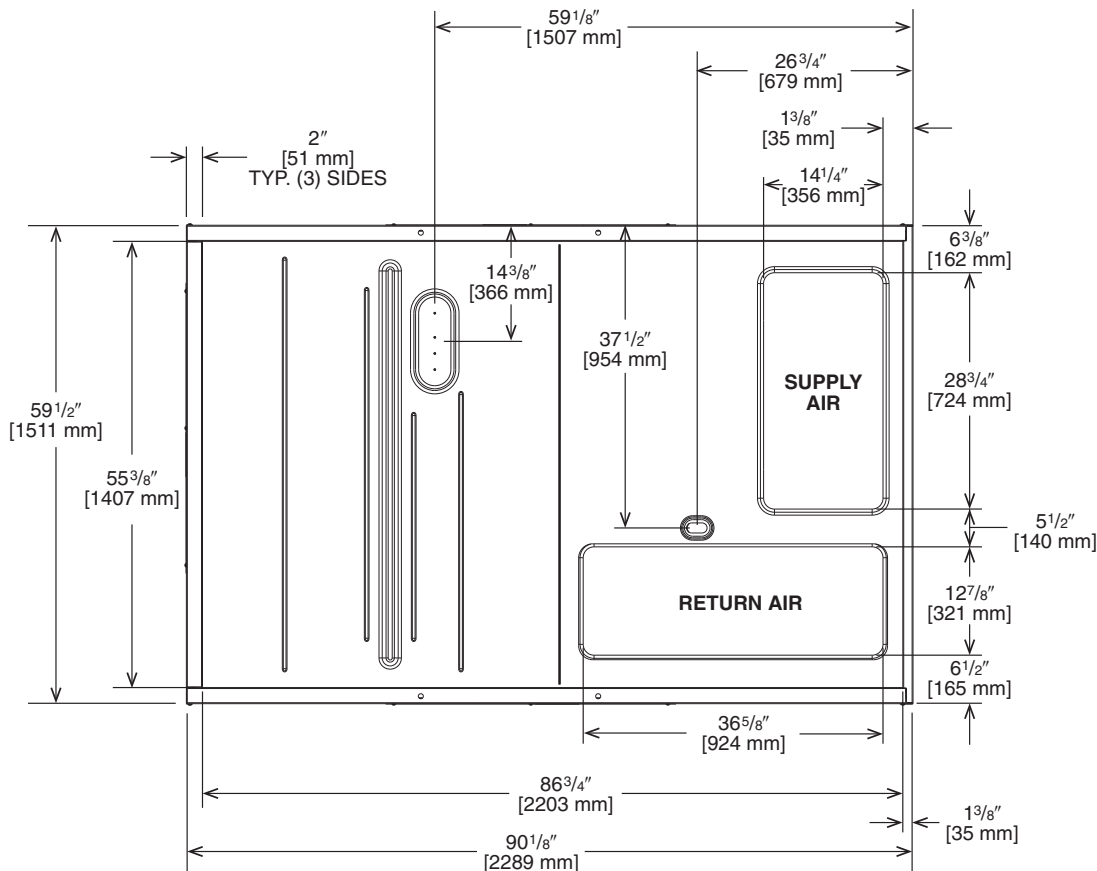

[] Designates Metric Conversions

WEIGHTS

Capacity Tons [kW]	Corner Weights by Percentage			
	A	B	C	D
7.5-12.5 [21.1-44.0]	26%	34%	17%	23%

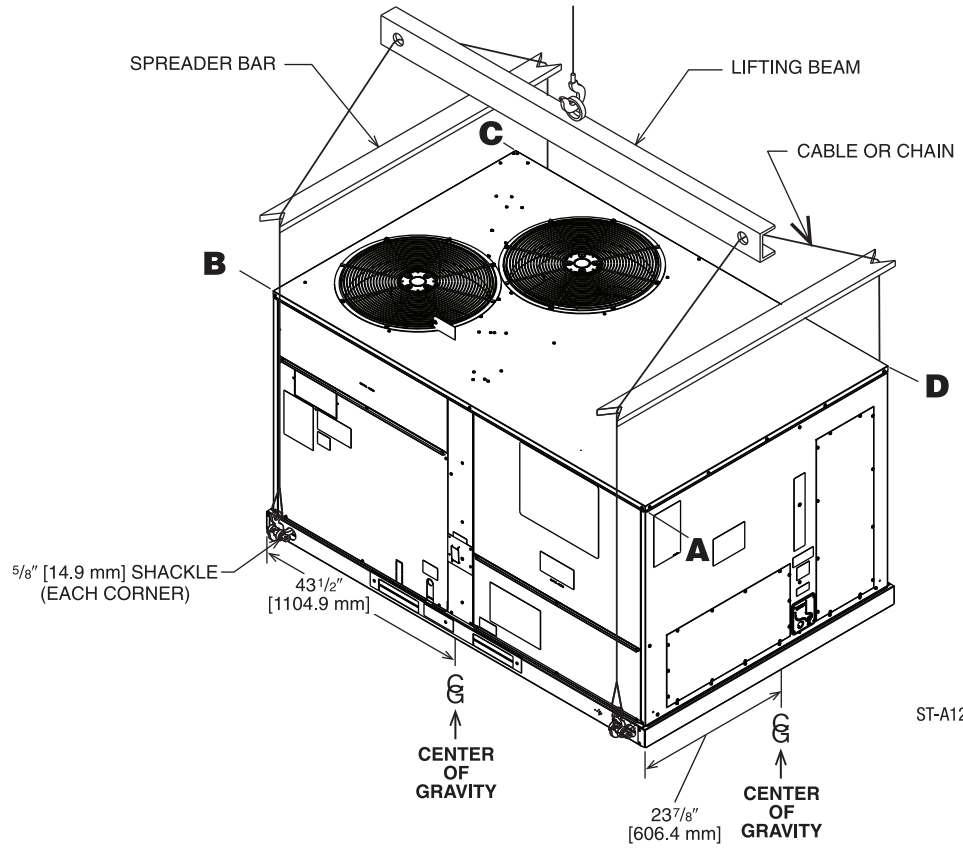


Illustration
 ST-A1273-01_J-00

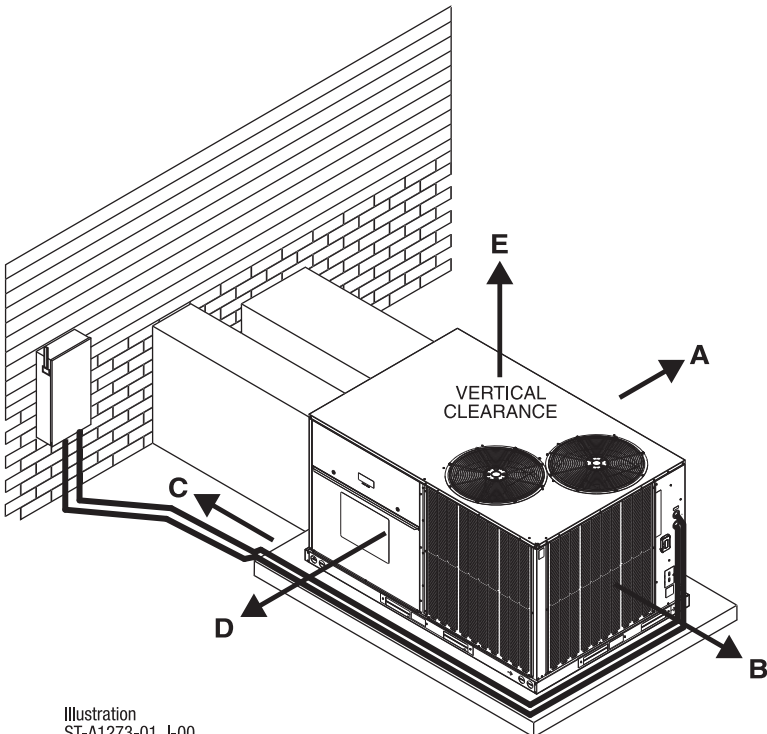


Illustration
 ST-A1273-01_I-00

CLEARANCES

The following minimum clearances must be observed for proper unit performance and serviceability.

RECOMMENDED CLEARANCE In. [mm]	LOCATION
48 [1219]	A - FRONT
24 [609]	B - CONDENSER END
48 [1219] ①	C - DUCT END
24 [609] ②	D - FILTER SIDE
60 [1524]	E - ABOVE

① 18" [457 mm] MINIMUM IF DRAINPAN WILL NOT BE REMOVED.

② 48" [1219 MM] MINIMUM IF ECONOMIZER IS INSTALLED.

[] Designates Metric Conversions

FIELD-INSTALLED ACCESSORY EQUIPMENT

Accessory	Model Number	Shipping Weight Lbs. [kg]	Installed Weight Lbs. [kg]	Factory Installation Available?
Economizers				
DDC Economizer with Single Enthalpy (Downflow) <i>MicroMetl Economizer with Honeywell Controller</i>	RXRD-01MDDBM3	86 [39.0]	57 [25.9]	Yes
DDC Economizer with Single Enthalpy (Horizontal) <i>MicroMetl Economizer with Honeywell Controller</i>	RXRD-01MDHBM3	84 [38.1]	55 [24.9]	No
Non-DDC Economizer with No Controls (Downflow) <i>MicroMetl Economizer, Belimo Actuator</i>	RXRD-31MDDAM3	86 [39.0]	57 [25.9]	No
Non-DDC Economizer with Single Enthalpy (Downflow) <i>MicroMetl Economizer with Siemens Controls</i>	RXRD-11MDDAM3	86 [39.0]	57 [25.9]	Yes
Non-DDC Economizer with Single Enthalpy (Downflow) <i>Ruskin Rooftop Systems Economizer with RRS Basic Controller</i>	RXRD-41MDDAM3	86 [39.0]	57 [25.9]	Yes
Non-DDC Economizer with Single Enthalpy (Downflow) <i>Ruskin Rooftop Systems Economizer with Siemens Controller</i>	RXRD-51MDDAM3	86 [39.0]	57 [25.9]	Yes
Non-DDC Economizer with Single Enthalpy (Horizontal) <i>MicroMetl Economizer with Siemens Controls</i>	RXRD-11MDHAM3	84 [38.1]	55 [24.9]	No
Non-DDC Economizer with Single Enthalpy (Horizontal) <i>Ruskin Rooftop Systems Economizer with RRS Basic Controller</i>	RXRD-41MDHAM3	84 [38.1]	55 [24.9]	No
Non-DDC Economizer with Single Enthalpy (Horizontal) <i>Ruskin Rooftop Systems Economizer with Siemens Controller</i>	RXRD-51MDHAM3	84 [38.1]	55 [24.9]	No
Economizer Universal DDC Interface Kit	RXRX-DDC01	40 [18.1]	34 [15.4]	Yes

Accessory	Model Number	Shipping Weight Lbs. [kg]	Installed Weight Lbs. [kg]	Factory Installation Available?
Comfort Alert ¹ (3 Phase) DDC	RXRX-AZ01	3 [1.5]	2 [0.9]	Yes
Comfort Alert ¹ (3 Phase) Non-DDC	RXRX-AZ02	3 [1.5]	2 [0.9]	Yes
Communication Card, BACnet	RXRX-AY01	1 [0.5]	1 [0.5]	No
Communication Card, LonWorks	RXRX-AY02	1 [0.5]	1 [0.5]	No
Concentric Adapter 7.5/8.5 Ton Drop	RXMC-DD01	40 [18.1]	34 [15.4]	No
Concentric Adapter 10 Ton Drop	RXMC-DD02	75 [34.0]	65 [29.5]	No
Concentric Adapter 12.5 Ton Drop	RXMC-DD03	75 [34.0]	65 [29.5]	No
Concentric Diffuser 7.5/8.5 Ton Drop	RXRN-AED2000	35 [15.9]	30 [13.6]	No
Concentric Diffuser 10.0 Ton Drop	RXRN-AED3415	170 [77.1]	160 [72.6]	No
Concentric Diffuser 12.5 Ton Drop	RXRN-AED3618	190 [86.2]	180 [81.6]	No
Concentric Diffuser 7.5/8.5 Ton Flush	RXRN-AEF2000	30 [13.6]	25 [11.3]	No
Concentric Diffuser 10.0 Ton Flush	RXRN-AEF3415	140 [113.4]	130 [59.0]	No
Concentric Diffuser 12.5 Ton Flush	RXRN-AEF3618	180 [81.6]	170 [77.1]	No
Convenience Outlet, Unwired	RXRX-BN01	2 [1.0]	1.5 [0.7]	Yes
Dual Enthalpy Kit (for Honeywell JADE™)	RXRX-BV01	1 [0.5]	1 [0.5]	No
Dual Enthalpy Kit DDC (for Honeywell DDC)	RXRX-BV02	1 [0.5]	1 [0.5]	No
Dual Enthalpy, Temperature and Humidity Sensor (for Ruskin Basic Controller)	PD955977	1 [0.5]	1 [0.5]	No
Dual Enthalpy, Temperature and Humidity Sensor (for Siemens)	PD555460	1 [0.5]	1 [0.5]	No

¹One (1) Comfort Alert required per compressor

²Refer to conversion kit index provided with the unit for LP conversion kit.

³Compatible with roofcurbs RXKG-CAE14 or RXKG-CAE24.

[] Designates Metric Conversions

FIELD-INSTALLED ACCESSORY EQUIPMENT (CONTINUED)

Accessory	Model Number	Shipping Weight Lbs. [kg]	Installed Weight Lbs. [kg]	Factory Installation Available?
Flue Diverter	RXR-DFG04	5 [2.3]	4 [1.8]	No
Freeze Stat Kit	RXR-AM01	2 [1.0]	1.5 [0.7]	Yes
Fresh Air Damper, Manual	RXR-ADA1	15 [6.8]	12 [5.4]	No
Fresh Air Damper, Motorized	RXR-ADB1	38 [17.2]	31 [14.06]	No
Fresh Air Damper, Motorized (DDC)	RXR-ADC1	38 [17.2]	31 [14.06]	No
Low-Ambient Control Kit	RXR-A04	4 [1.8]	3 [1.4]	Yes
LP Kit ²	RXG-FP39	2 [1.0]	1 [0.5]	No
MERV 8 Filter 7.5 & 8.5 Ton	RXM-M08A22020	2.0 [0.9]	1 [0.45]	No
MERV 8 Filter 10 & 12.5 Ton	RXM-M08A22520	2.0 [0.9]	1 [0.45]	No
MERV 13 Filter 7.5 & 8.5 Ton	RXM-M13A22020	2.0 [0.9]	1 [0.45]	No
MERV 13 Filter 10 & 12.5 Ton	RXM-M13A22520	2.0 [0.9]	1 [0.45]	No
Outdoor Coil Louver Kit - 7.5 & 8.5 Ton	RXR-ADD04A	52 [23.6]	47 [21.3]	Yes
Outdoor Coil Louver Kit - 10 & 12.5 Ton	RXR-ADD04B	43 [19.5]	39 [17.7]	Yes
Power Exhaust (230V) Kit, Convertible MicroMetl	RXR-CDF01C	104 [47.2]	94 [42.6]	No
Power Exhaust (460V) Kit, Convertible MicroMetl	RXR-CDF01D	104 [47.2]	94 [42.6]	No
Power Exhaust (230V) Kit for Downflow Economizer (RRS)	RXR-RDF01C	104 [47.2]	94 [42.6]	No
Power Exhaust (460V) Kit for Downflow Economizer (RRS)	RXR-RDF01D	104 [47.2]	94 [42.6]	No
Power Exhaust (575V) Kit for Downflow Economizer (RRS)	RXR-RDF01Y	104 [47.2]	94 [42.6]	No
Power Exhaust (230V) Kit for Horizontal Economizer (RRS)	RXR-RDF03C	104 [47.2]	94 [42.6]	No
Power Exhaust (460V) Kit for Horizontal Economizer (RRS)	RXR-RDF03D	104 [47.2]	94 [42.6]	No
Power Exhaust (575V) Kit for Horizontal Economizer (RRS)	RXR-RDF03Y	104 [47.2]	94 [42.6]	No
Roofcurb Adapter ³	RXR-DDCAE	235 [106.6]	215 [97.5]	No
Roofcurb, 14"	RXK-DDD14	109 [49.4]	104 [47.2]	No
Roofcurb, 14" Welded	RXK-SD14	109 [49.4]	105 [47.6]	No
Roofcurb, 24"	RXK-DDD24	145 [65.8]	140 [63.5]	No
Roofcurb, 24" Welded	RXK-SD24	145 [65.8]	142 [64.4]	No
Sensor, Carbon Dioxide (Wall Mount)	RXR-AR02	3 [1.4]	2 [1.0]	No
Sensor, Room Humidity	RHC-ZNS4	1 [0.5]	1 [0.5]	No
Sensor, Room Temperature and Relative Humidity	RHC-ZNS5	1 [0.5]	1 [0.5]	No
Smoke Detector Kit, Return	RXR-BS03	5 [2.7]	3.5 [1.6]	No
Smoke Detector Kit, Return/Supply	RXR-BS04	7 [3.2]	5 [2.7]	No
Unfused Service Disconnect	RXR-BP01	10 [4.5]	9 [4.1]	Yes

¹One (1) Comfort Alert required per compressor

²Refer to conversion kit index provided with the unit for LP conversion kit.

³Compatible with roofcurbs RXK-CAE14 or RXK-CAE24.

The installer is responsible for verifying all accessory dimensions and weights before unit installation.

[] Designates Metric Conversions

COMMUNICATION CARDS



BACnet COMMUNICATION CARD RXRX-AY01


The field installed BACnet Communication Card allows the RTU-C unit controller to communicate with a third party building management system that supports the BACnet Application Specific Controller device profile. The BACnet Communication Module plugs onto the unit RTU-C controller and allows communication between the RTU-C and the BACnet MSTP network.



LonWorks COMMUNICATION CARD RXRX-AY02

The field installed LonWorks Communication Card allows the RTU-C unit controller to communicate with a third party building management system that supports the LonMark Space Comfort Controller (SCC) functional profile or LonMark Discharge Air Controller (DAC) functional profile. The LonMark Communication Module plugs onto the RTU-C controller and allows communication between the RTU-C and a LonWorks Network.


CONCENTRIC DIFFUSER APPLICATION

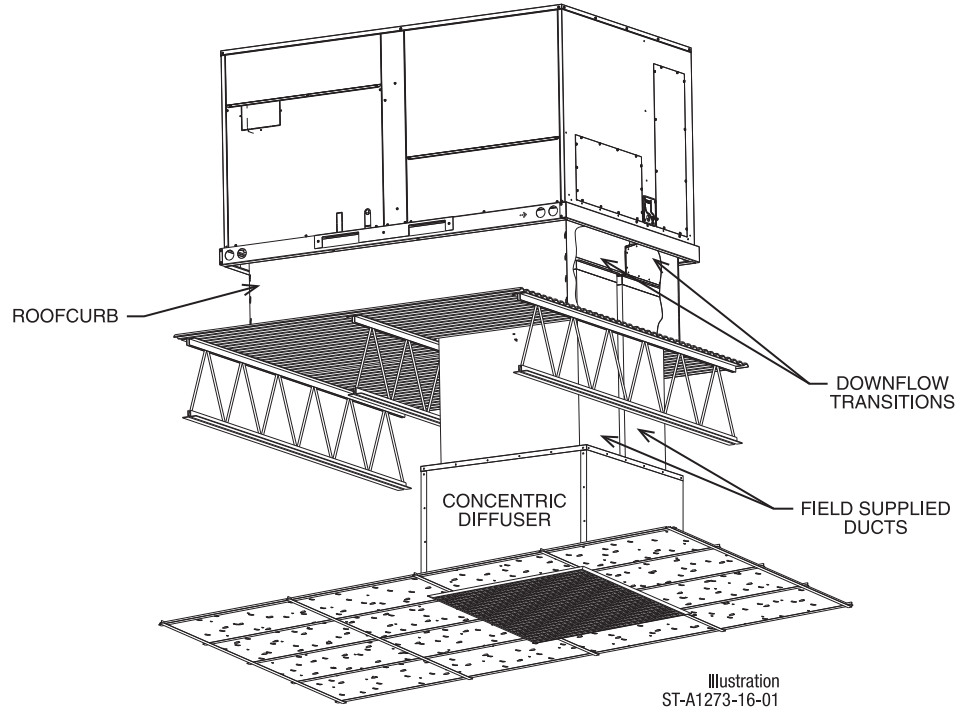

DOWNFLOW TRANSITION DRAWINGS

RXMC-DD01 – Concentric Adapter 7.5 / 8.5 Ton Drop

- Used with AEF2000 or AED2000 Concentric Diffusers

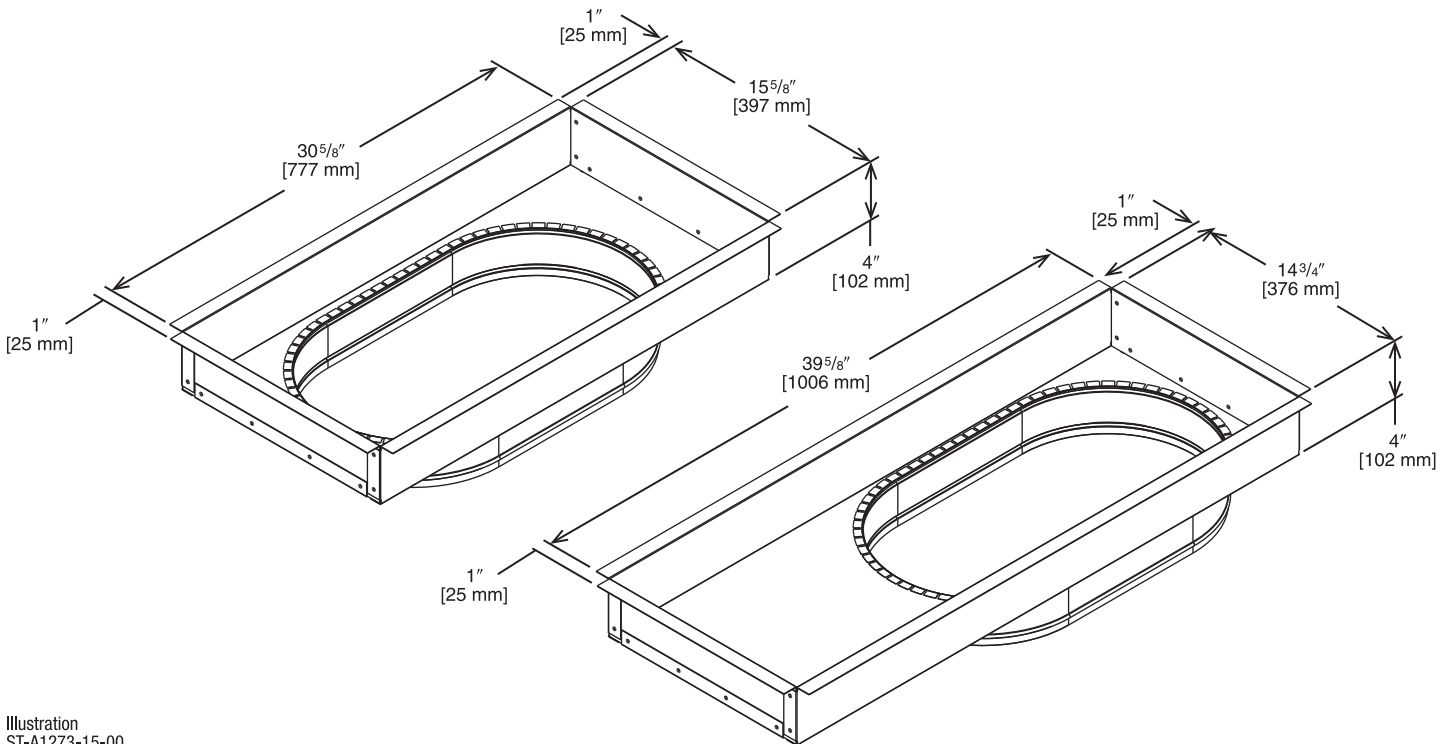

[] Designates Metric Conversions

DOWNFLOW TRANSITION DRAWINGS

RXMC-DD02—Concentric Adapter 10 Ton Drop

- Used with AEF3415 or AED3415 Concentric Diffusers




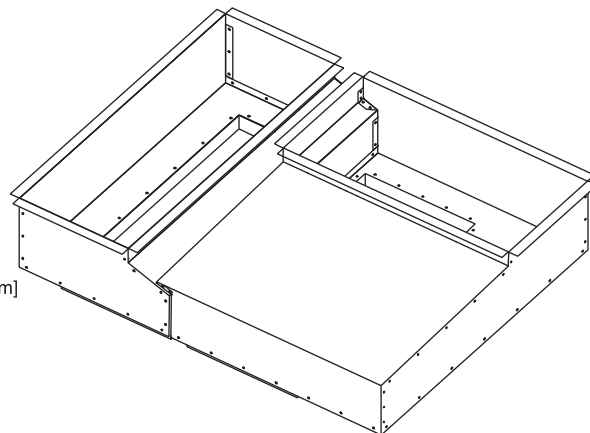


Illustration
 ADS-106193-02

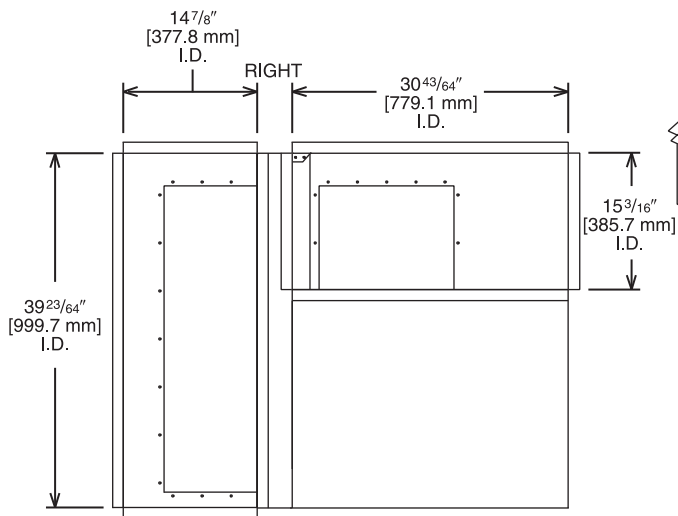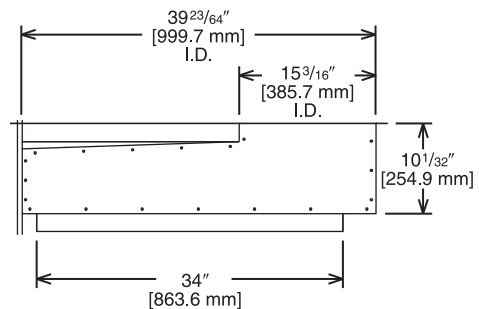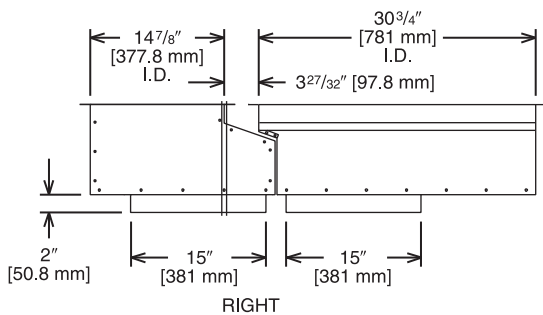

[] Designates Metric Conversions

DOWNFLOW TRANSITION DRAWINGS

RXMC-DD03— Concentric Adapter 12.5 Ton Drop

- Used with AEF3618 or AED3618 Concentric Diffusers




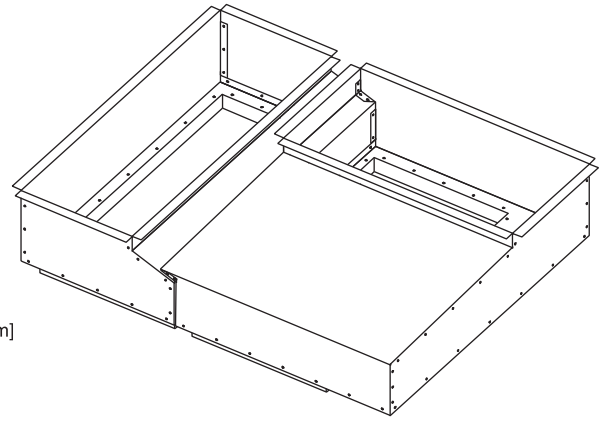


Illustration
 ADS-106193-03

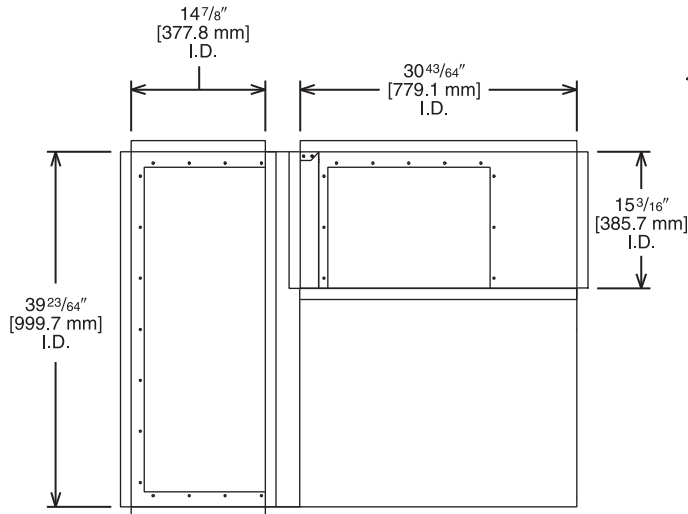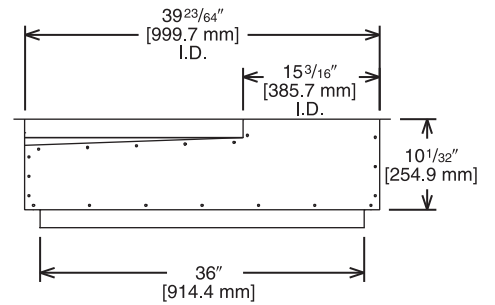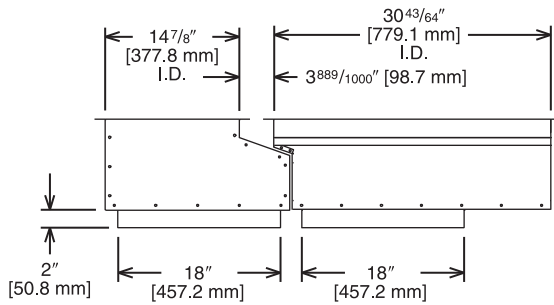


[] Designates Metric Conversions

CONCENTRIC DIFFUSER 7.5/8.5 TON DROP

RXRN-AED2000

**For Use With Concentric Adapter (RXMC-DD01)
 and 20" [508 mm] Round Supply and Return Ducts**

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging supports
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner

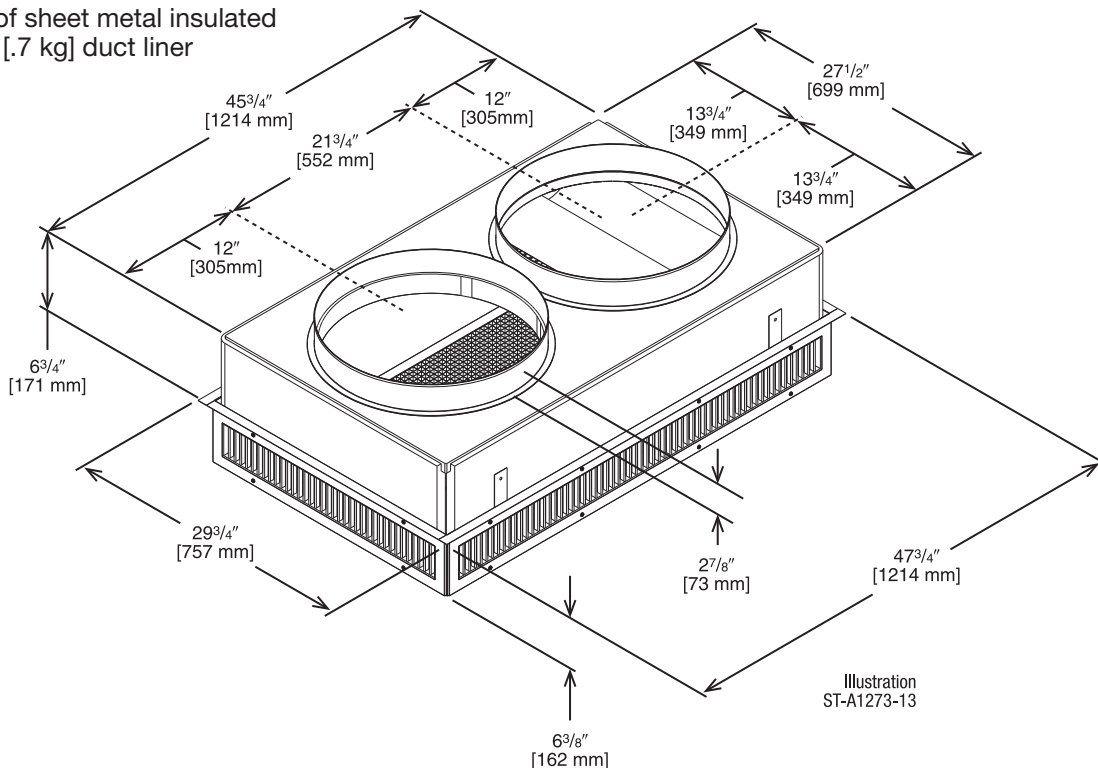

ENGINEERING DATA^①

Model No.	Flow Rate CFM [L/s]	Throw ^{② ③} Feet [m]	Neck Velocity fpm [m/s]	Noise Level ^④ (dbA)
RXRN-AED2000	2600 [1222]	22-39 [6.7-11.9]	669.0 [3.4]	32
	2800 [1316]	23-40 [7.1-12.2]	720.0 [3.7]	38
	3000 [1410]	25-42 [7.6-12.8]	772.0 [3.9]	40
	3200 [1504]	26-43 [7.9-13.1]	823.0 [4.2]	41
	3400 [1598]	27-45 [8.2-13.7]	874.0 [4.4]	42
	3600 [1692]	30-50 [9.1-15.2]	925.5 [4.7]	45
	3800 [1786]	32-53 [9.8-16.2]	976.8 [4.9]	48
	4000 [1880]	34-56 [10.4-17.1]	1028.1 [5.2]	50

- NOTES:** ① All data is based on the air diffusion council guidelines.
 ② Throw data is based on 75 FPM Terminal Velocities using isothermal air.
 ③ Throw is based on diffuser blades being directed in a straight pattern.
 ④ Actual noise levels may vary due to duct design and do not include transmitted unit noise. Adequate duct attenuation must be provided to reduce sound output from the unit.

[] Designates Metric Conversions

CONCENTRIC DIFFUSER 10.0 TON DROP

15" x 34" [381 x 836 mm]

RXRN-AED3415

**For Use With Concentric Adapter (RXMC-DD02)
 and 15" x 34" [381 x 836 mm]
 Supply and Return Ducts**

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging supports
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner
- Double deflection diffuser with the blades secured by spring steel

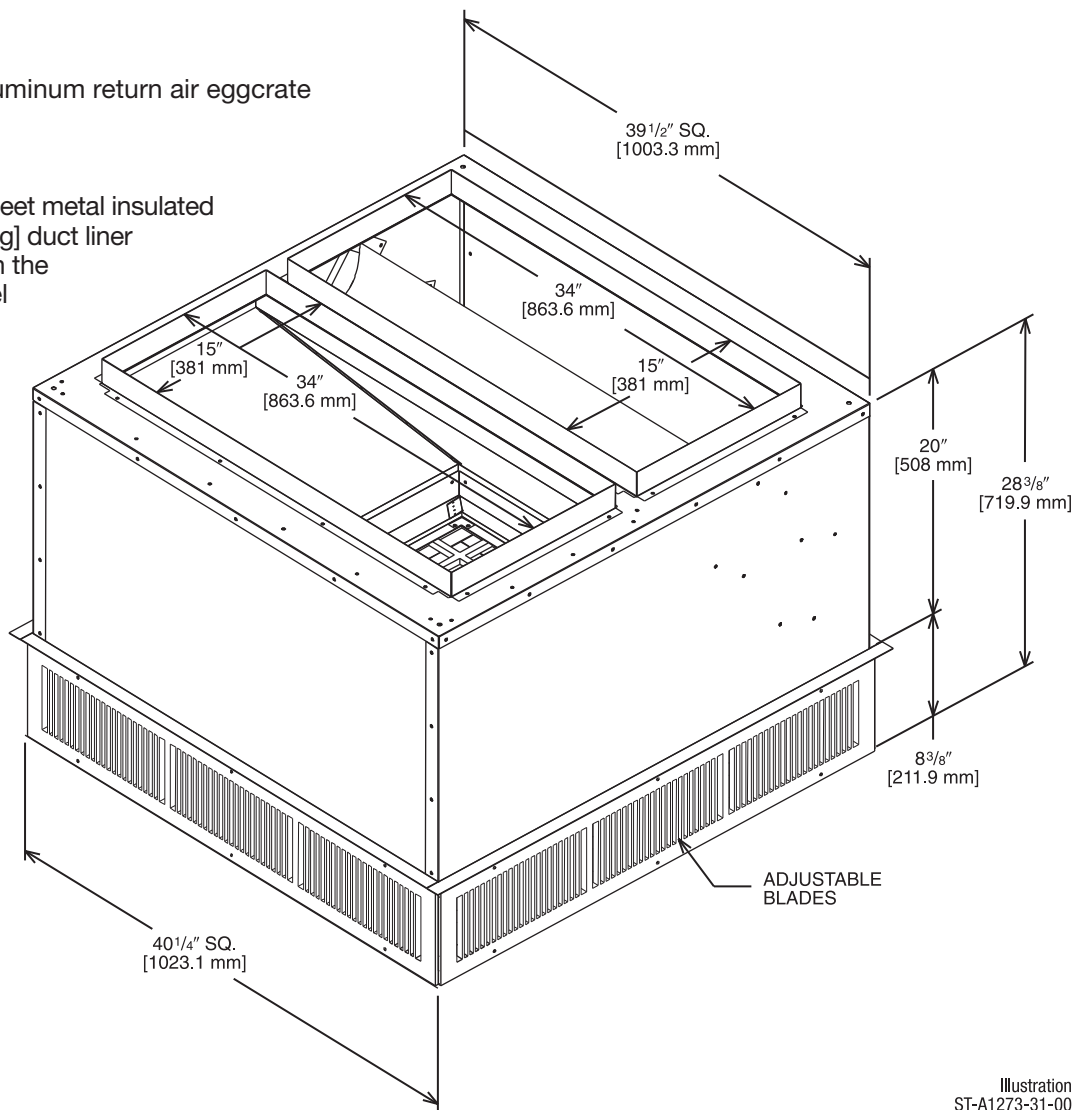


Illustration
 ST-A1273-31-00

ENGINEERING DATA^①

Model No.	Flow Rate CFM [L/s]	Throw ^{② ③} Feet [m]	Neck Velocity fpm [m/s]	Noise Level ^④ (dbA)
RXRN-AED3415	3600 [1692]	26-53 [7.9-16.2]	851.0 [4.3]	27
	3800 [1786]	27-55 [8.2-16.8]	898.0 [4.5]	29
	4000 [1880]	29-58 [8.8-17.7]	946.0 [4.8]	30
	4200 [1974]	31-61 [9.4-18.6]	993.0 [5.1]	32
	4400 [2068]	32-64 [9.8-19.5]	1040.0 [5.3]	33
	4600 [2162]	34-66 [10.4-20.1]	1087.5 [5.5]	35

- NOTES:** ① All data is based on the air diffusion council guidelines.
 ② Throw data is based on 75 FPM Terminal Velocities using isothermal air.
 ③ Throw is based on diffuser blades being directed in a straight pattern.
 ④ Actual noise levels may vary due to duct design and do not include transmitted unit noise.
 Adequate duct attenuation must be provided to reduce sound output from the unit.

[] Designates Metric Conversions

CONCENTRIC DIFFUSER 12.5 TON DROP 18" x 36" [457 x 914 mm]

RXRN-AED3618

**For Use With Concentric Adapter (RXMC-DD03)
 and 18" x 36" [457 x 914 mm]
 Supply and Return Ducts**

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging support
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner
- Double deflection diffuser with the blades secured by spring steel

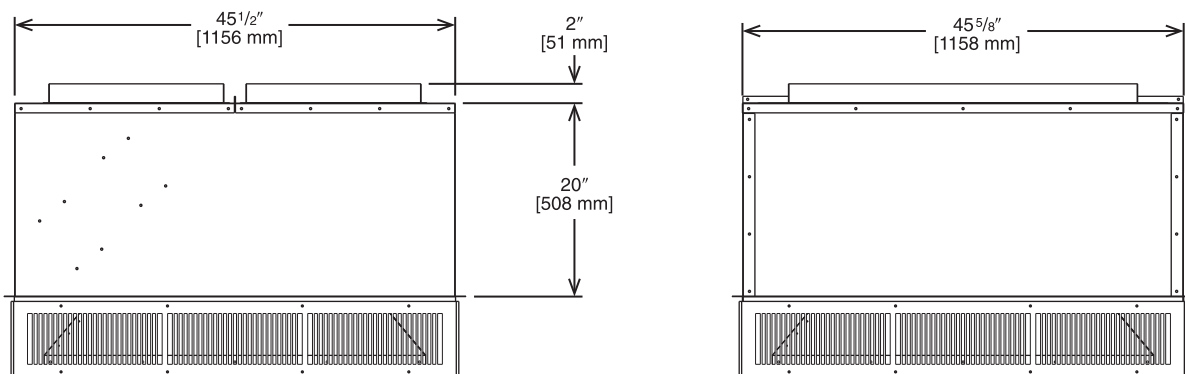
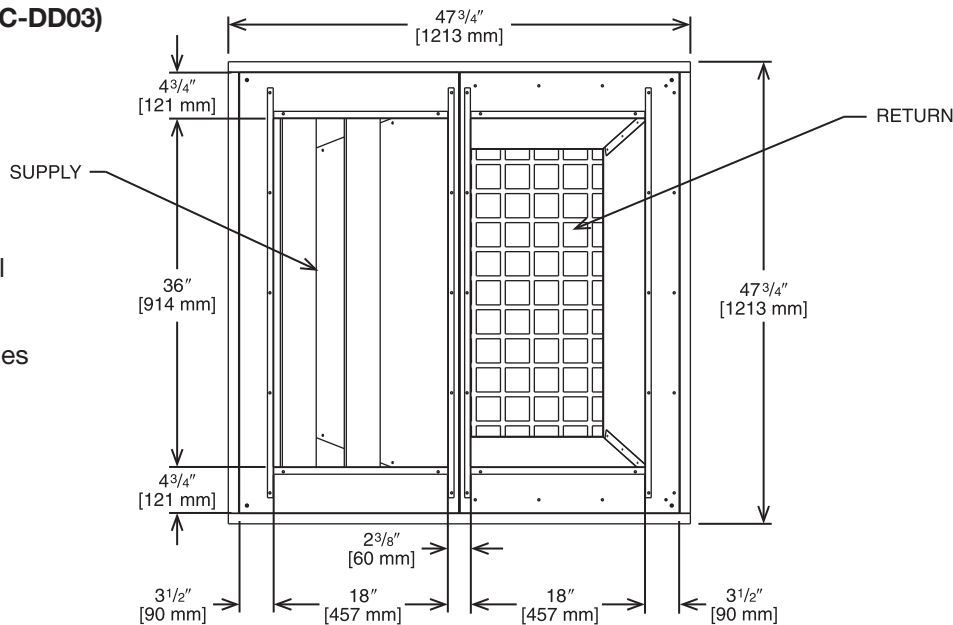


Illustration
 ST-A1273-11-00

ENGINEERING DATA^①

Model No.	Flow Rate CFM [L/s]	Throw ^{② ③} Feet [m]	Neck Velocity fpm [m/s]	Noise Level ^④ (dba)
RXRN-AED3618	4400 [2068]	29-55 [8.8-16.8]	841 [4.3]	26
	4600 [2162]	31-57 [9.4-17.4]	875 [4.4]	28
	4800 [2256]	32-60 [9.8-18.3]	915 [4.6]	29
	5000 [2350]	33-62 [10.1-18.9]	951 [4.8]	30
	5200 [2444]	34-65 [10.4-19.8]	988 [5.1]	31
	5400 [2538]	36-67 [10.9-20.4]	1025 [5.2]	32

- NOTES:** ① All data is based on the air diffusion council guidelines.
 ② Throw data is based on 75 FPM Terminal Velocities using isothermal air.
 ③ Throw is based on diffuser blades being directed in a straight pattern.
 ④ Actual noise levels may vary due to duct design and do not include transmitted unit noise. Adequate duct attenuation must be provided to reduce sound output from the unit.

[] Designates Metric Conversions

CONCENTRIC DIFFUSER 7.5/8.5 TON FLUSH

RXRN-AEF2000

**For Use With Concentric Adapter (RXMC-DD01)
 20" [508 mm] Round Supply and Return Ducts**

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging supports
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner

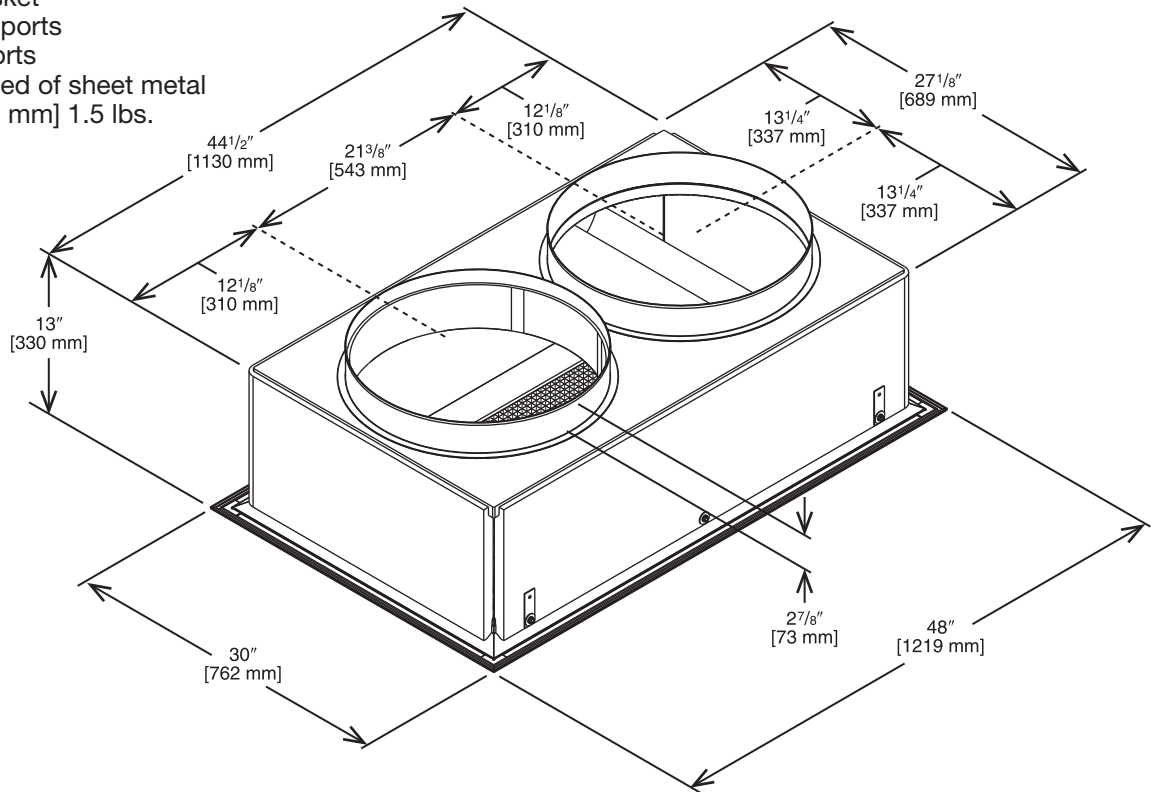


Illustration
 ST-A1273-14-00

ENGINEERING DATA^①

Model No.	Flow Rate CFM [L/s]	Throw ^{② ③} Feet [m]	Neck Velocity fpm [m/s]	Noise Level ^④ (dbA)
RXRN-AEF2000	2600 [1222]	17-24 [5.2-7.3]	663 [3.4]	30
	2800 [1316]	18-28 [5.5-8.5]	714 [3.6]	35
	3000 [1410]	20-30 [6.1-9.1]	765 [3.9]	35
	3200 [1504]	22-33 [6.7-10.1]	816 [4.1]	40
	3400 [1598]	23-37 [7-11.3]	867 [4.4]	40
	3600 [1692]	25-38 [7.6-11.6]	918 [4.7]	43
	3800 [1786]	26-39 [7.9-11.9]	969 [4.9]	45
	4000 [1880]	27-40 [8.2-12.2]	1020 [5.2]	48

- NOTES:**
- ① All data is based on the air diffusion council guidelines.
 - ② Throw data is based on 75 FPM Terminal Velocities using isothermal air.
 - ③ Throw is based on diffuser blades being directed in a straight pattern.
 - ④ Actual noise levels may vary due to duct design and do not include transmitted unit noise. Adequate duct attenuation must be provided to reduce sound output from the unit.

[] Designates Metric Conversions

CONCENTRIC DIFFUSER 10.0 TON FLUSH 18" x 36" [457 x 914 mm]

RXRN-AEF3415

For Use With Concentric Adapter (RXMC-DD02)
18" x 36" [457 x 914 mm]
Supply and Return Ducts

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging supports
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner

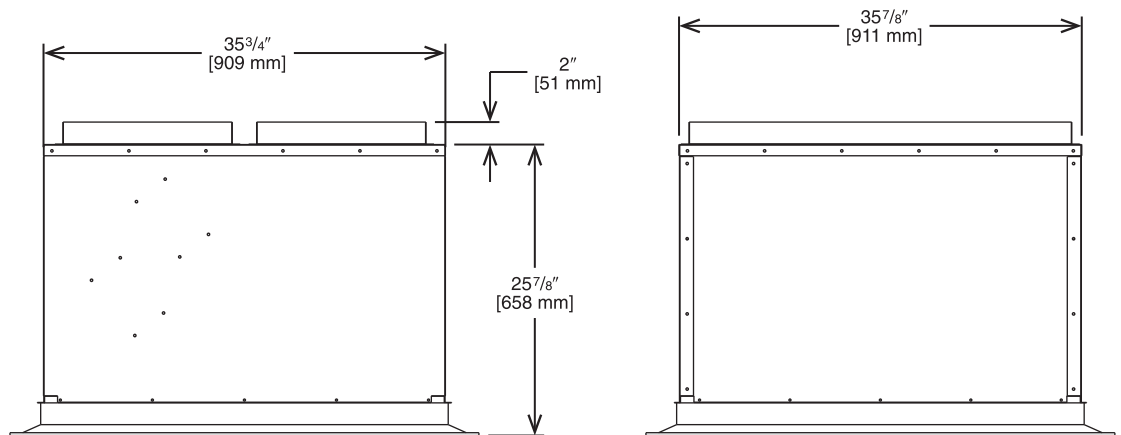
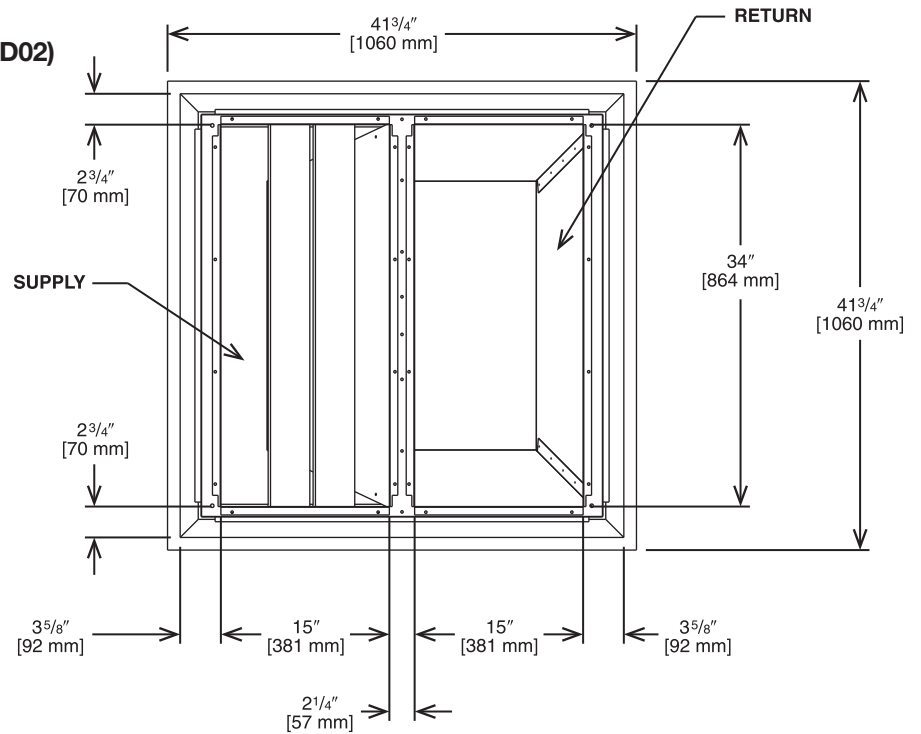


Illustration
ST-A1273-07-00

ENGINEERING DATA^①

Model No.	Flow Rate CFM [L/s]	Throw ^{② ③} Feet [m]	Neck Velocity fpm [m/s]	Noise Level ^④ (dbA)
RXRN-AEF3415	3600 [1692]	14-34 [4.3-10.4]	844 [4.3]	27
	3800 [1786]	15-36 [4.6-11.1]	891 [4.5]	29
	4000 [1880]	16-37 [4.9-11.3]	938 [4.8]	30
	4200 [1974]	17-39 [5.2-11.9]	985 [5.1]	32
	4400 [2068]	18-41 [5.5-12.5]	1032 [5.2]	33
	4600 [2162]	19-43 [5.8-13.1]	1079 [5.5]	35
	4800 [2256]	20-45 [6.1-13.7]	1126 [5.7]	36

NOTES: ① All data is based on the air diffusion council guidelines.

② Throw data is based on 75 FPM Terminal Velocities using isothermal air.

③ Throw is based on diffuser blades being directed in a straight pattern.

④ Actual noise levels may vary due to duct design and do not include transmitted unit noise. Adequate duct attenuation must be provided to reduce sound output from the unit.

[] Designates Metric Conversions

CONCENTRIC DIFFUSER 12.5 TON FLUSH 18" x 36" [457 x 914 mm]

RXRN-AEF3618

**For Use With Concentric Adapter (RXMC-DD03)
 18" x 36" [457 x 914 mm]
 Supply and Return Ducts**

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging supports
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner

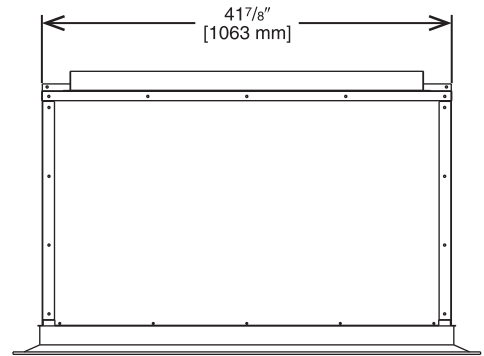
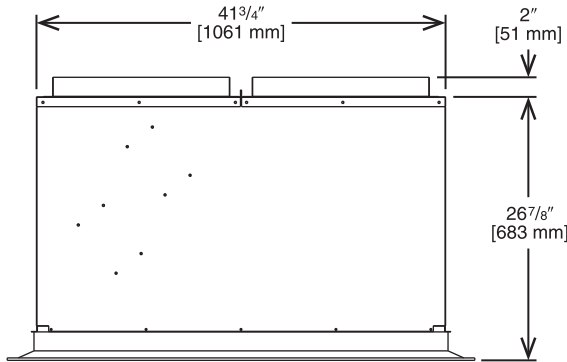
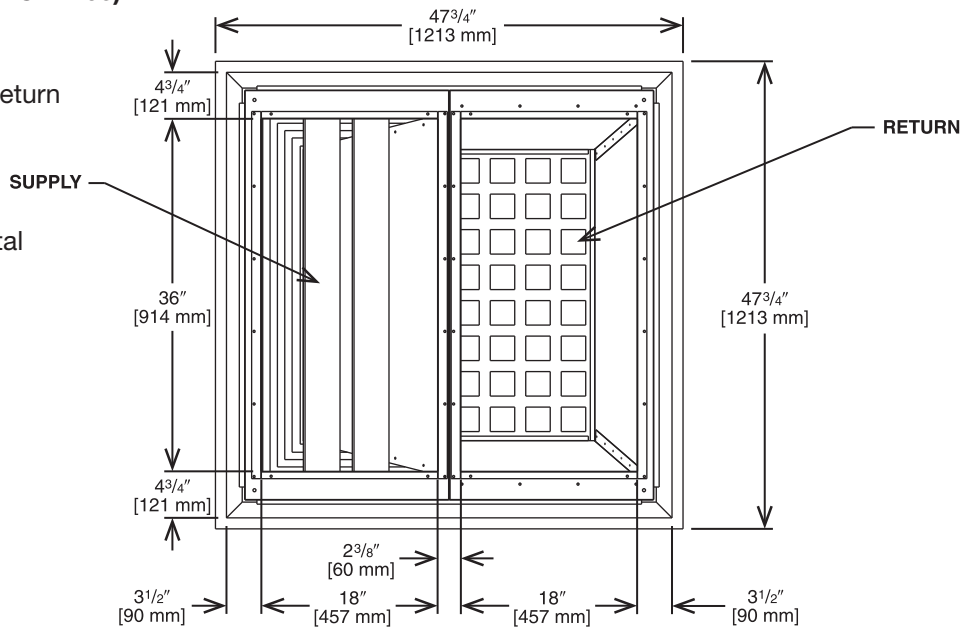


Illustration
 ST-A1273-12-00

ENGINEERING DATA^①

Model No.	Flow Rate CFM [L/s]	Throw ^{② ③} Feet [m]	Neck Velocity fpm [m/s]	Noise Level ^④ (dbA)
RXRN-AEF3618	4400 [2068]	13-28 [4.1-8.5]	922 [47]	35
	4600 [2162]	14-30 [4.3-9.1]	962 [4.9]	37
	4800 [2256]	15-31 [4.6-9.4]	1002 [5.1]	39
	5000 [2350]	16-32 [4.9-9.8]	1043 [5.3]	40
	5200 [2444]	17-33 [5.2-10.1]	1083 [5.5]	42
	5400 [2538]	18-35 [5.5-10.7]	1123 [5.7]	43

- NOTES:** ① All data is based on the air diffusion council guidelines.
 ② Throw data is based on 75 FPM Terminal Velocities using isothermal air.
 ③ Throw is based on diffuser blades being directed in a straight pattern.
 ④ Actual noise levels may vary due to duct design and do not include transmitted unit noise.
 Adequate duct attenuation must be provided to reduce sound output from the unit.

[] Designates Metric Conversions

DDC ECONOMIZER WITH SINGLE ENTHALPY (DOWNFLOW) MICROMETL ECONOMIZER WITH HONEYWELL CONTROLLER

Factory or Field-Installed

RXRD-01MDDBM3

RXXR-BV02—Dual Enthalpy Kit DDC (for Honeywell DDC)

RXXR-AR02—Sensor, Carbon Dioxide (Wall Mount)

- Features **Honeywell** Controls
- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Ultra Low Leak Dampers meet California Title 24 requirements and ASHRAE 90.1 2022
- Slip-In Design for Easy Installation
- Standard Barometric Relief Damper
- Single Enthalpy with Dual Enthalpy Upgrade Kit Option
- CO₂ Input Sensor Option
- Field Assembled Hood Ships with Economizer
- Economizer Ships Complete for Downflow Duct Application
- Optional Remote Minimum Position Potentiometer (270 ohm) (Honeywell #S963B1136) is Available from Prostock
- Field Installed Power Exhaust Option
- Prewired for Smoke Detector
- If connected to a Building Automation System (BAS), all economizer functions can be viewed on the (BAS), or 16 x 2 LCD screen
- If connected to thermostat, all economizer functions can be viewed on 16 x 2 LCD screen

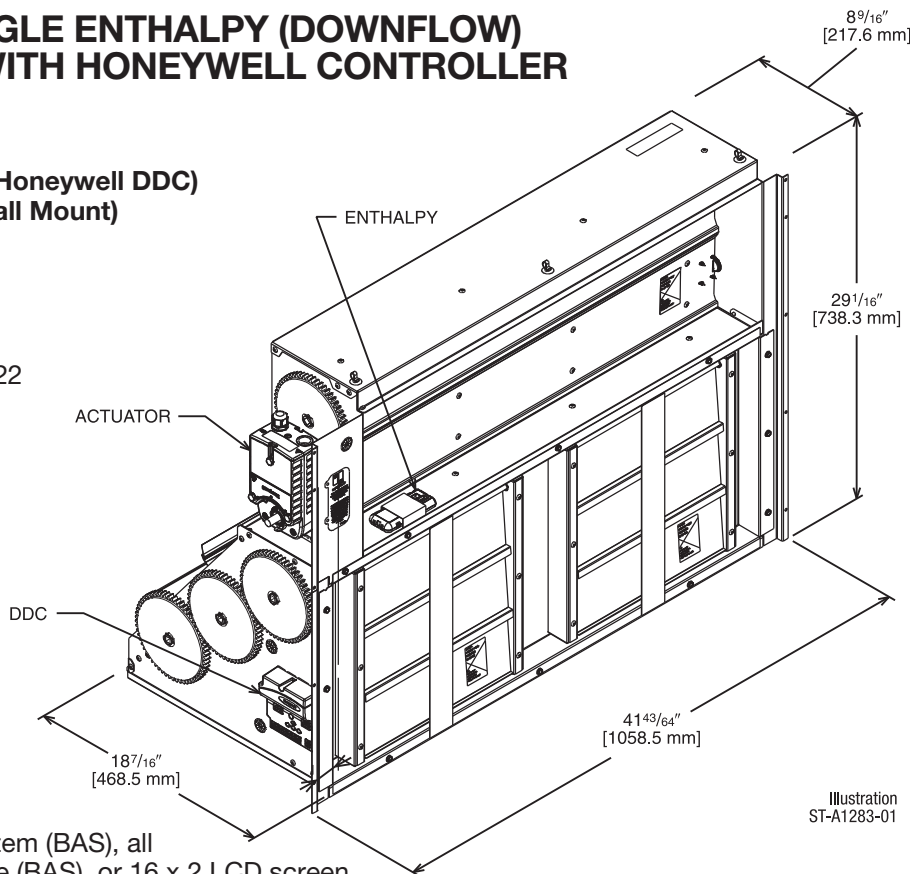


Illustration
ST-A1283-01

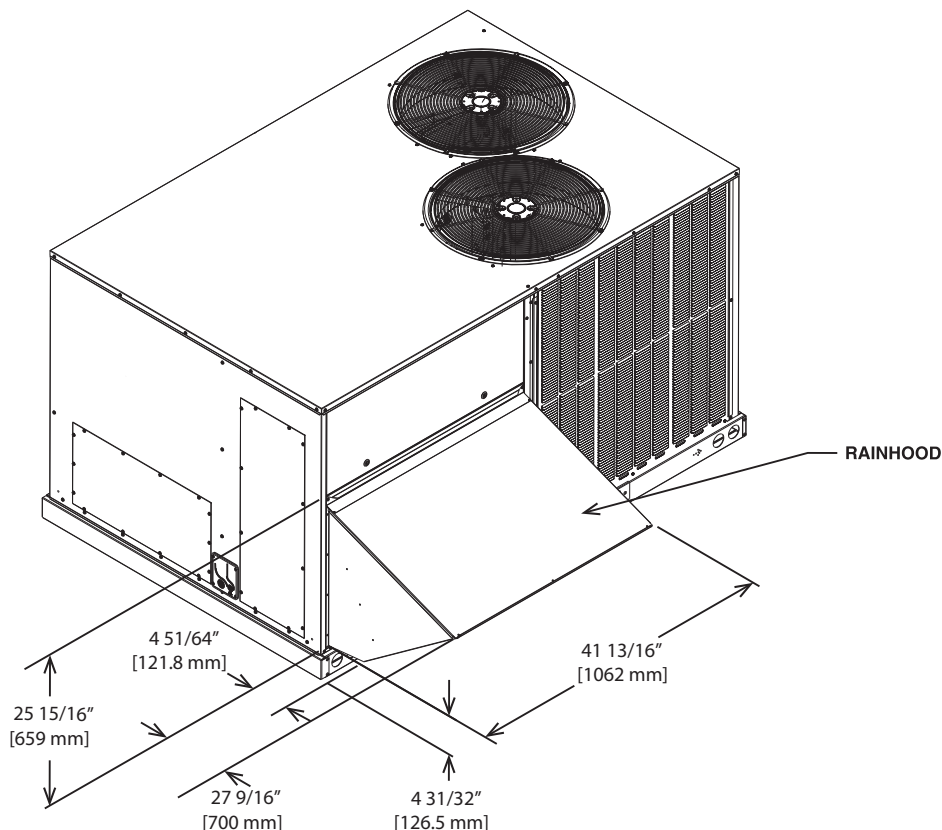


Illustration
ST-A1273-01_G-01



[] Designates Metric Conversions

DDC ECONOMIZER WITH SINGLE ENTHALPY (HORIZONTAL) MICROMETL ECONOMIZER WITH HONEYWELL CONTROLLER

Field-Installed Only

RXRD-01MDHBM3
RRRX-BV02—Dual Enthalpy Kit DDC (for Honeywell DDC)
RRRX-AR02—Sensor, Carbon Dioxide (Wall Mount)

- Features **Honeywell** Controls
- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Ultra Low Leak Dampers meet California Title 24 requirements and ASHRAE 90.1 2022
- Slip-In Design for Easy Installation
- Standard Barometric Relief Damper
- Single Enthalpy with Dual Enthalpy Upgrade Kit Option
- CO₂ Input Sensor Option
- Field Assembled Hood Ships with Economizer
- Economizer Ships Complete for Horizontal Duct Application
- Optional Remote Minimum Position Potentiometer (270 ohm) (Honeywell #S963B1136) is Option from Prostock
- Field Installed Power Exhaust Available
- If connected to a Building Automation System (BAS), all economizer functions can be viewed on the (BAS), or 16 x 2 LCD screen
- If connected to thermostat, all economizer functions can be viewed on 16 x 2 LCD screen

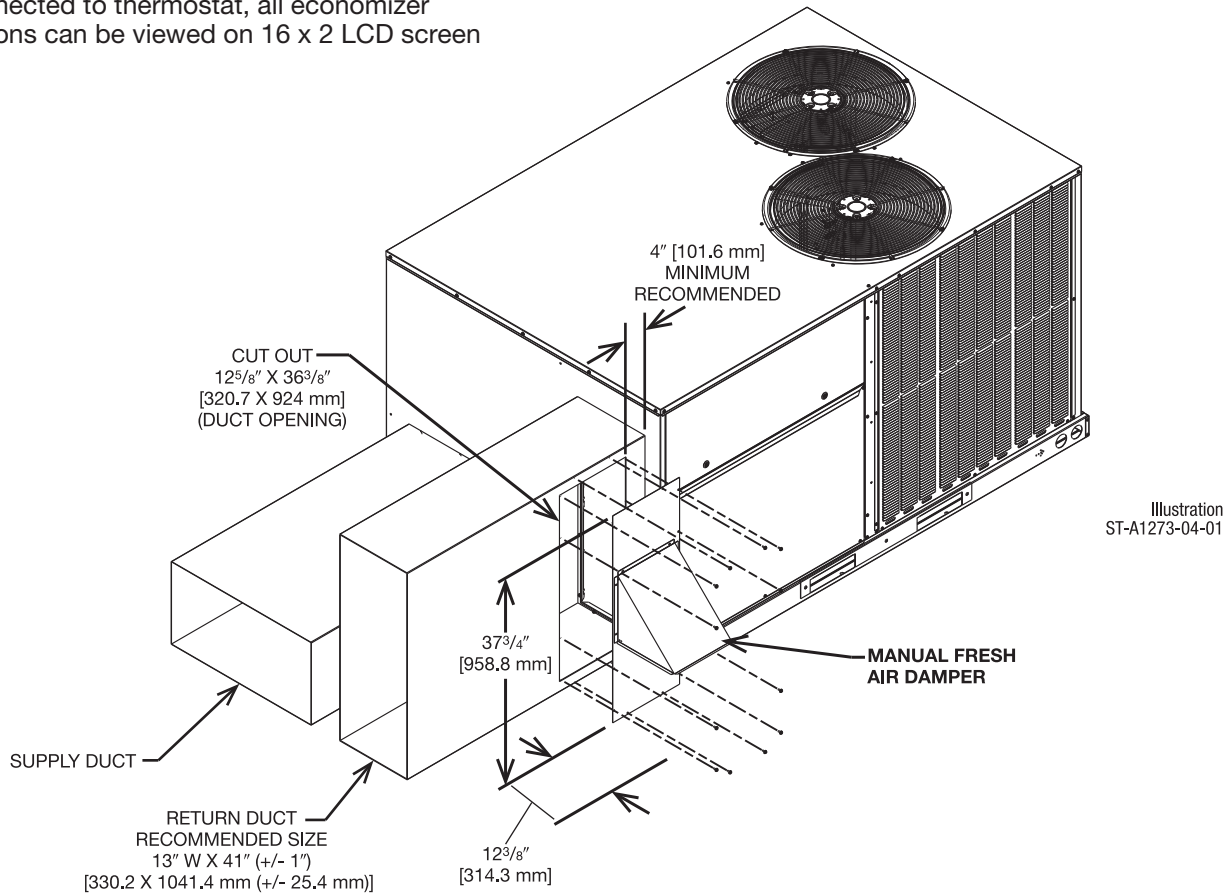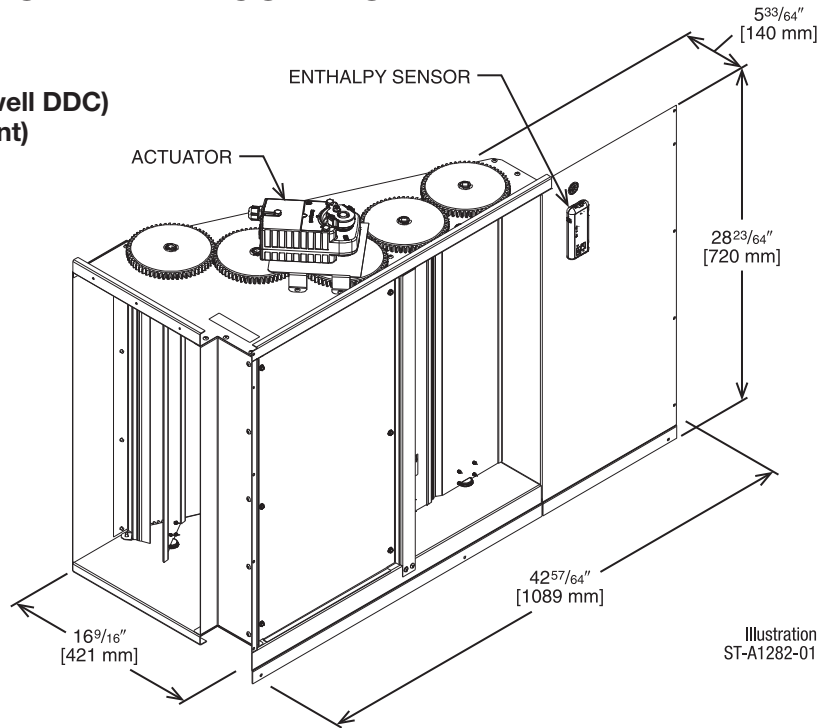


[] Designates Metric Conversions

NON-DDC ECONOMIZER WITH NO CONTROLS (DOWNFLOW) MICROMETL ECONOMIZER, BELIMO ACTUATOR Field-Installed Only

RXRD-31MDDAM3

RXXR-ACD01 – Wire Harness for Non-DDC Generic Economizers

- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Ultra Low Leak Dampers meet California Title 24 requirements and ASHRAE 90.1 2022 AMCA 511 Certified Class 1A Leakage—1" WG of differential pressure tested to AMCA Standard 500-D
- Slip-In Design for Easy Installation
- Plug-In Polarized 12-pin Electrical Connections
- Standard Barometric Relief Damper
- Controller and Sensors to be determined by Customer
- Field Assembled Hood Ships with Economizer
- Economizer Ships Complete for Downflow Duct Application
- Field Installed Power Exhaust Option

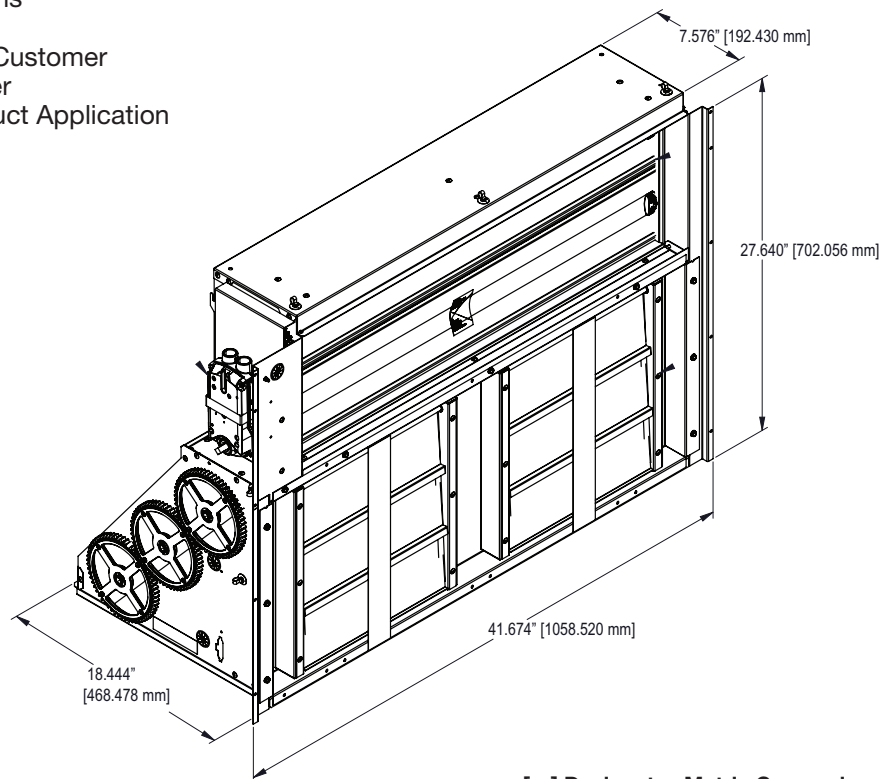

[] Designates Metric Conversions

NON-DDC ECONOMIZER WITH SINGLE ENTHALPY (DOWNFLOW) MICROMETL ECONOMIZER WITH SIEMENS CONTROLS

Factory or Field-Installed

RXRD-11MDDAM3
PD555460—Dual Enthalpy, Temperature and Humidity Sensor
(for Siemens Controller)
RRX-AR02—Sensor, Carbon Dioxide (Wall Mount)

- Features **Siemens** Controls
- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Low Leakage Dampers
- Slip-In Design for Easy Installation
- Standard Barometric Relief Damper
- Single Enthalpy with Dual Enthalpy Upgrade Kit Available
- CO₂ Input Sensor Option
- Field Assembled Hood Ships with Economizer
- Economizer Ships Complete for Downflow Duct Application
- Field Installed Power Exhaust Option
- Prewired for Smoke Detector
- If connected to a Building Automation System (BAS), all economizer functions can be viewed on the (BAS) or 16 x 2 LCD screen
- If connected to thermostat, all economizer functions can be viewed on 16 x 2 LCD screen
- Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXRX-DDC01)

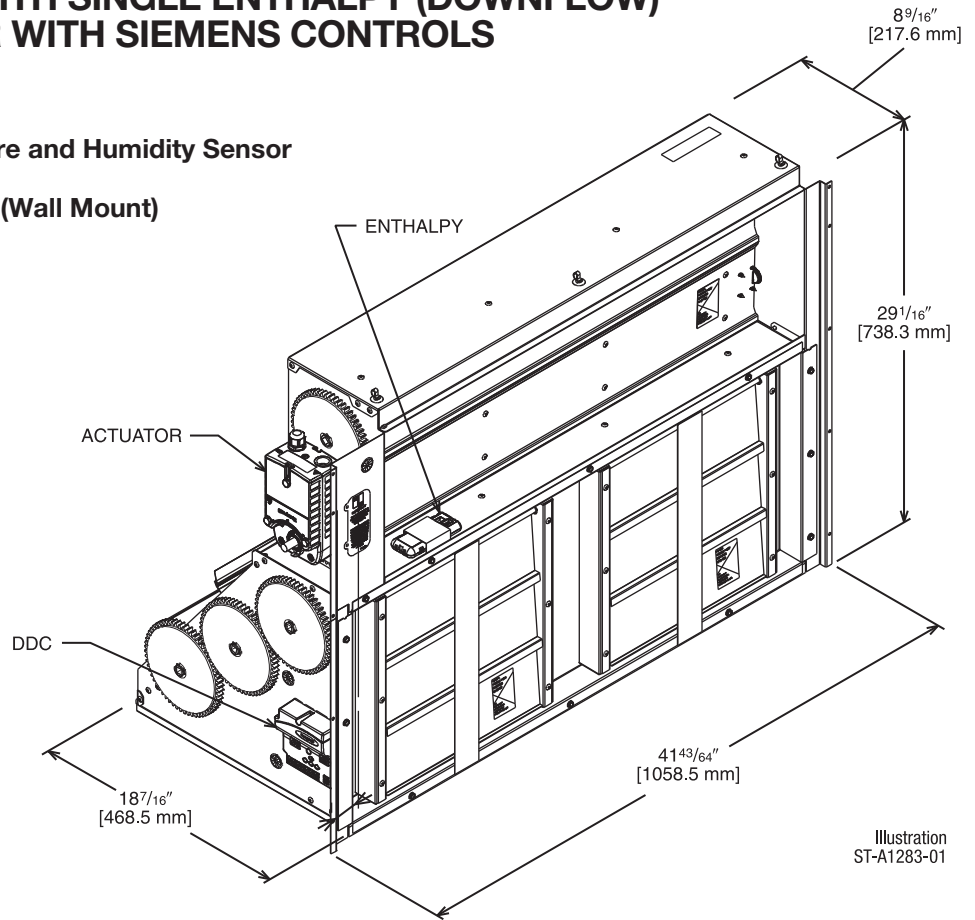


Illustration
 ST-A1283-01

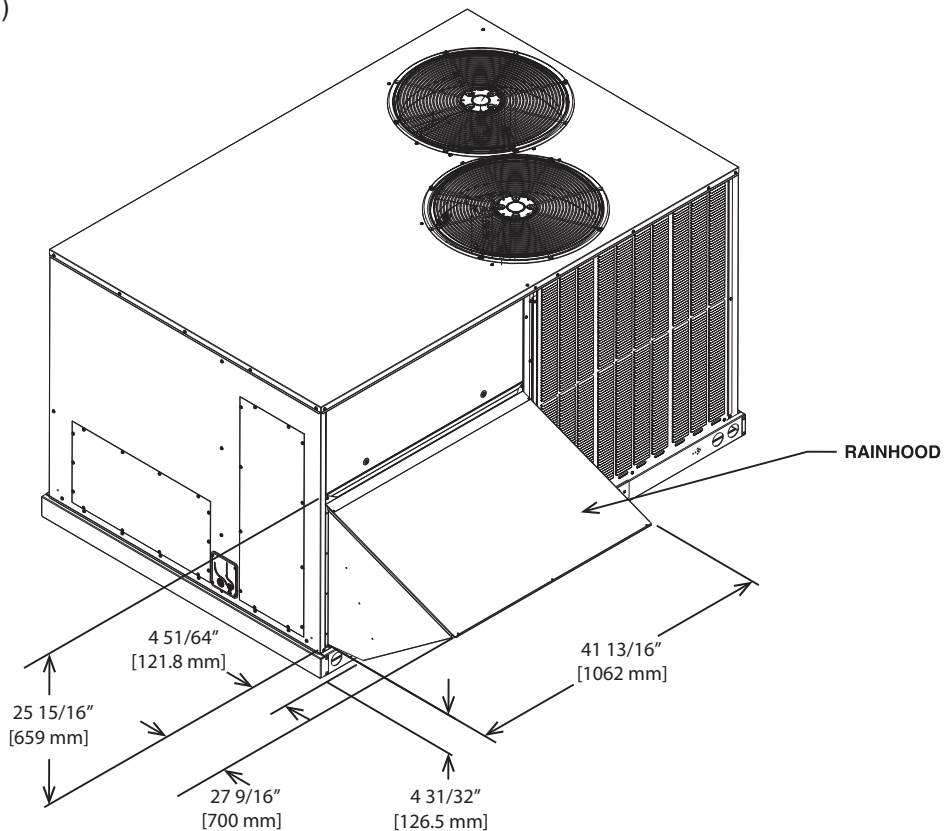


Illustration
 ST-A1273-01_G-01

[] Designates Metric Conversions

NON-DDC ECONOMIZER WITH SINGLE ENTHALPY (DOWNFLOW) RUSKIN ROOFTOP SYSTEMS ECONOMIZER WITH RRS BASIC CONTROLLER

Factory or Field-Installed


RXRD-41MDDAM3

PD955977—Temperature and Humidity Sensor for Dual Enthalpy (for Ruskin Basic Controller)

RXXR-AR02—Sensor, Carbon Dioxide (Wall Mount)

These ultra-low leak economizer dampers meet the following minimum construction standards:

1. Frame shall be 14 to 24 gauge galvanized steel channel.
2. Damper blades are galvanized steel airfoil shaped, double skin construction of 14 gauge [2.0] equivalent thickness, 6" [152 mm] wide. Parallel action.
3. Blade edge seals shall be Ruskiprene™ type or equivalent suitable for -72°F [-60°C] to +275°F [+135°C] mechanically locked into the blade edge. Adhesive or clip-on type seals are unacceptable.
4. Jamb seals shall be flexible metal, compression type to prevent leakage between blade end and damper frame. Blade end overlapping frame is unacceptable.
5. Bearings shall be stainless steel or nylon bushing.
6. Axles shall be hexagonal positively locked into the damper blade.
7. Drive mechanism shall be concealed out of airstream to reduce pressure drop and noise.
8. Economizer damper is tested and rated based upon AMCA Publication 500-D.
9. RRS controls feature the Basic economizer controller with 24V actuator. Controls capable of Economizer Fault Detection and Diagnostics for code compliance.
10. Damper shall meet the leakage requirements of the International Energy Conservation Code by leaking less than 3 cfm/sq. ft. at 1" of static pressure and shall be AMCA licensed as a class 1A damper. Complies with reliability and performance requirements as specified by the California Energy Commission's Title 24 Standard and ASHRAE 90.1 2022 . Economizer dampers shall be Ruskin Rooftop Systems ECD60 model.
11. Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXXR-DDC01)

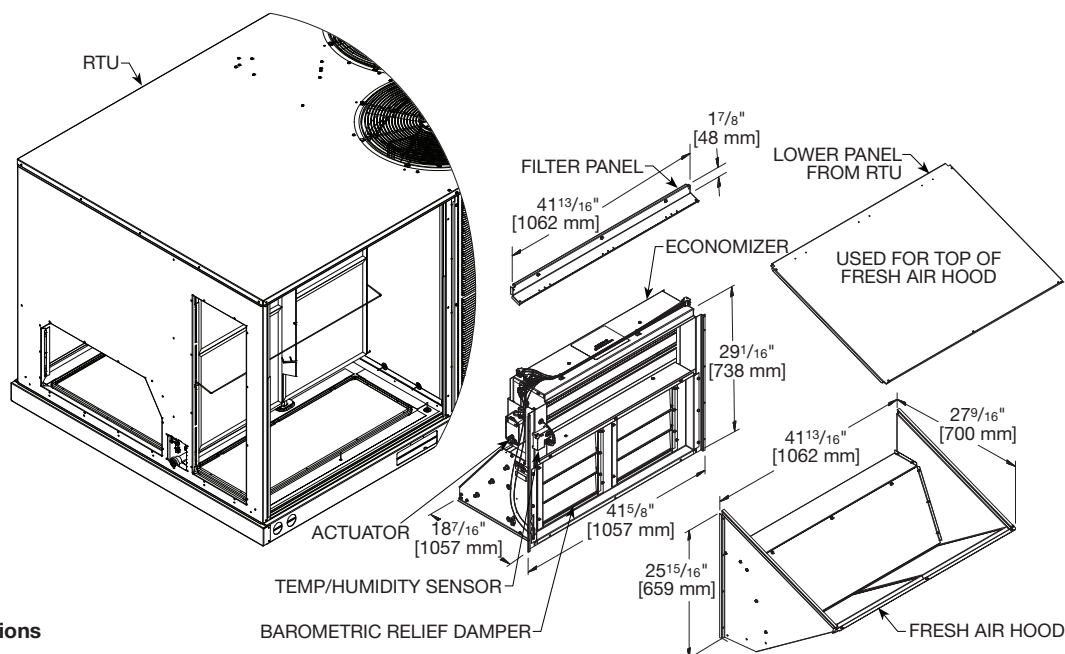

[] Designates Metric Conversions

NON-DDC ECONOMIZER WITH SINGLE ENTHALPY (DOWNFLOW) RUSKIN ROOFTOP SYSTEMS ECONOMIZER WITH SIEMENS CONTROLLER

Factory or Field-Installed


RXRD-51MDDAM3

PD555460—Dual Enthalpy, Temperature and Humidity Sensor (for Siemens Controller)

RXX-AR02—Sensor, Carbon Dioxide (Wall Mount)

These ultra-low leak economizer dampers meet the following minimum construction standards:

1. Frame shall be 14 to 24 gauge galvanized steel channel.
2. Damper blades are galvanized steel airfoil shaped, double skin construction of 14 gauge [2.0] equivalent thickness, 6" [152 mm] wide. Parallel action.
3. Blade edge seals shall be Ruskiprene™ type or equivalent suitable for -72°F [-60°C] to +275°F [+135°C] mechanically locked into the blade edge. Adhesive or clip-on type seals are unacceptable.
4. Jamb seals shall be flexible metal, compression type to prevent leakage between blade end and damper frame. Blade end overlapping frame is unacceptable.
5. Bearings shall be stainless steel or nylon bushing.
6. Axles shall be hexagonal positively locked into the damper blade.
7. Drive mechanism shall be concealed out of airstream to reduce pressure drop and noise.
8. Economizer damper is tested and rated based upon AMCA Publication 500-D.
9. Controls feature the Siemens controller with Siemens 24v actuator. Controls capable of Economizer Fault Detection and Diagnostics for code compliance.
10. Damper shall meet the leakage requirements of the International Energy Conservation Code by leaking less than 3 cfm/sq. ft. at 1" of static pressure and shall be AMCA licensed as a class 1A damper. Complies with reliability and performance requirements as specified by the California Energy Commission's Title 24 Standard and ASHRAE 90.1 2022. Economizer dampers shall be Ruskin Rooftop Systems ECD60 model.
11. Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXX-DDC-01)

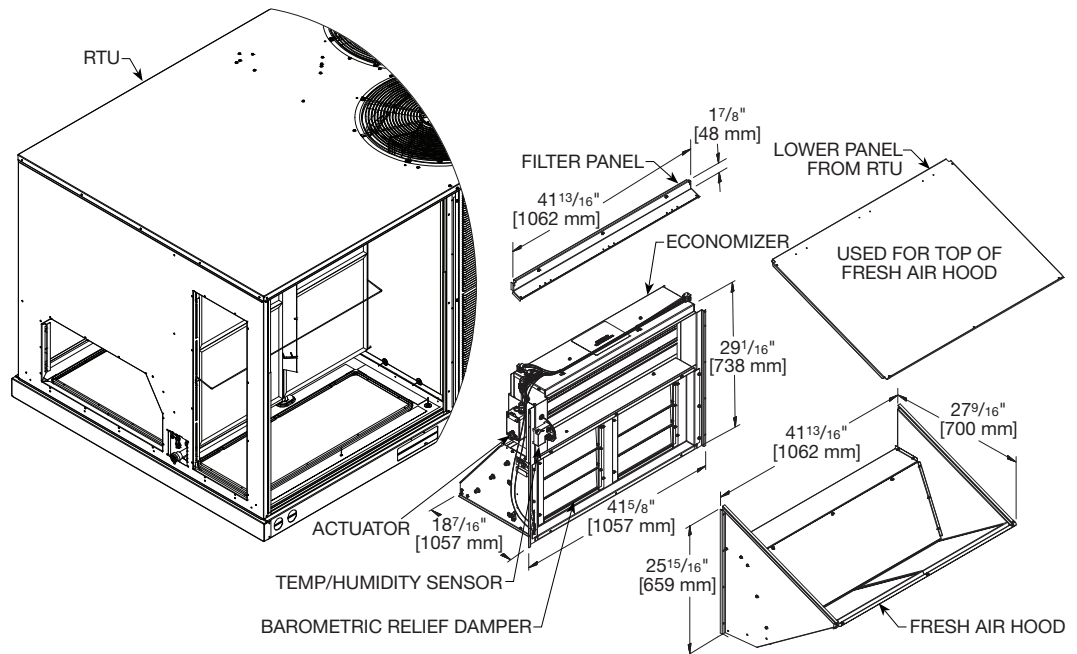

[] Designates Metric Conversions

NON-DDC ECONOMIZER WITH SINGLE ENTHALPY (HORIZONTAL) MICROMETL ECONOMIZER WITH SIEMENS CONTROLS



Field-Installed Only

RXRD-11MDHAM3

PD555460—Dual Enthalpy, Temperature and Humidity Sensor (for Siemens Controller)

RXRX-AR02—Sensor, Carbon Dioxide (Wall Mount)

- Features **Siemens** Controls
- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Low Leakage Dampers
- Slip-In Design for Easy Installation
- Standard Barometric Relief Damper
- Single Enthalpy with Dual Enthalpy Upgrade Kit Available
- CO₂ Input Sensor Option
- Field Assembled Hood Ships with Economizer
- Economizer Ships Complete for Horizontal Duct Application
- Field-Installed Power Exhaust Option
- If connected to a Building Automation System (BAS), all economizer functions can be viewed on the (BAS) or 16 x 2 LCD screen
- If connected to thermostat, all economizer functions can be viewed on 16 x 2 LCD screen
- Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXRX-DDC01)

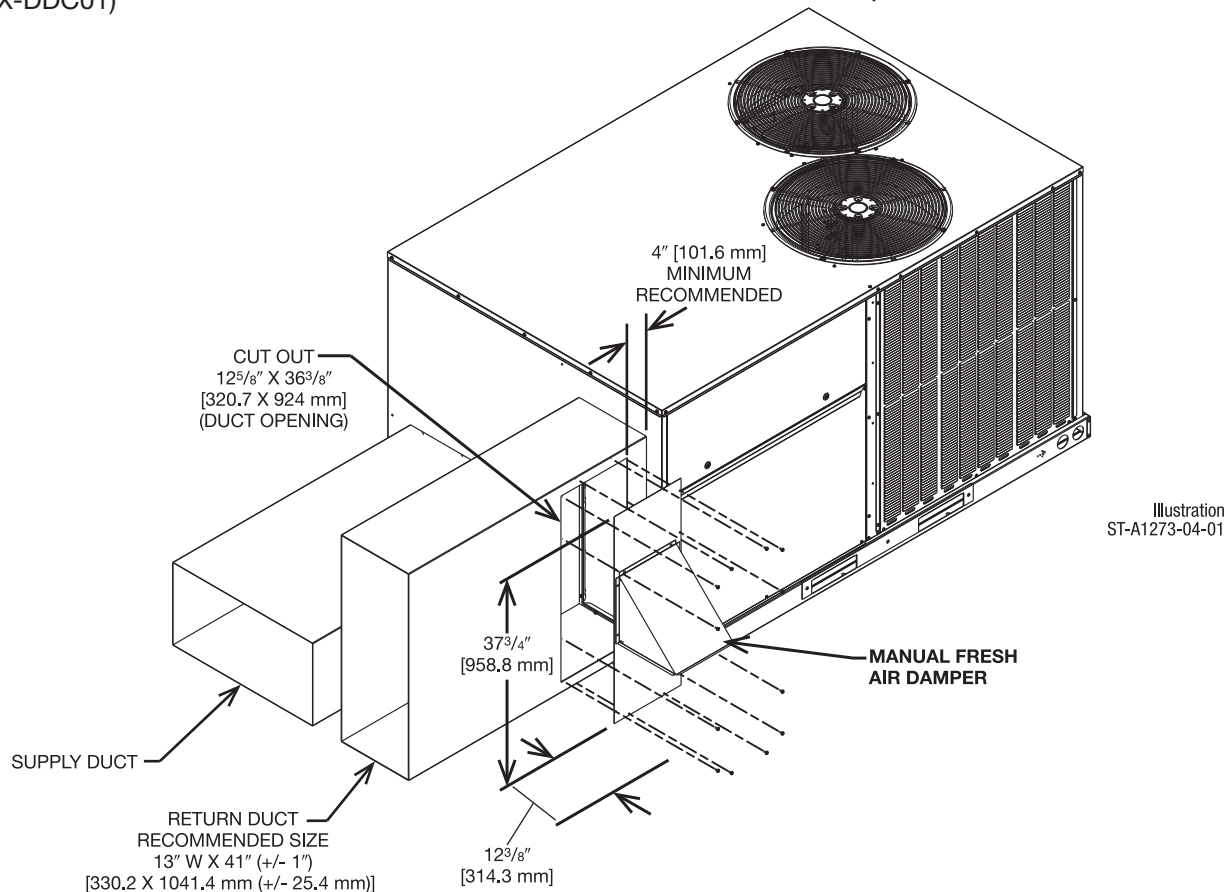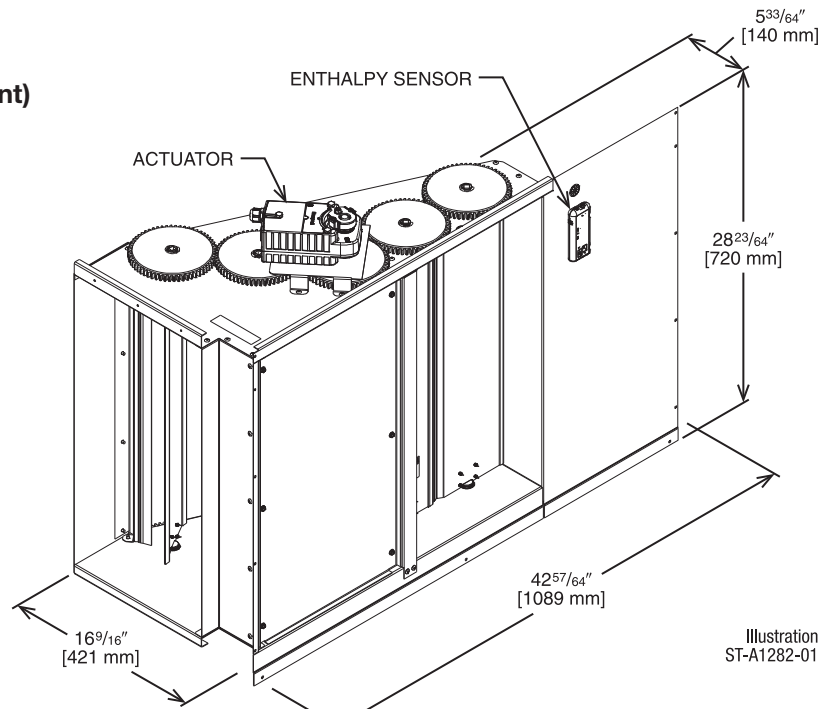

[] Designates Metric Conversions


NON-DDC ECONOMIZER WITH SINGLE ENTHALPY (HORIZONTAL) RUSKIN ROOFTOP SYSTEMS ECONOMIZER WITH RRS BASIC CONTROLLER

Field-Installed Only

RXRD-41MDHAM3
PD955977 – Dual Enthalpy, Temperature and Humidity Sensor (for Ruskin Basic Controller)
RRX-AR02 – Sensor, Carbon Dioxide (Wall Mount)

These ultra-low leak economizer dampers meet the following minimum construction standards:

1. Frame shall be 14 to 24 gauge galvanized steel channel.
2. Damper blades are galvanized steel airfoil shaped, double skin construction of 14 gauge [2.0] equivalent thickness, 6" [152 mm] wide. Parallel action.
3. Blade edge seals shall be Ruskiprene™ type or equivalent suitable for -72°F [-60°C] to +275°F [+135°C] mechanically locked into the blade edge. Adhesive or clip-on type seals are unacceptable.
4. Jamb seals shall be flexible metal, compression type to prevent leakage between blade end and damper frame. Blade end overlapping frame is unacceptable.
5. Bearings shall be stainless steel or nylon bushing.
6. Axles shall be hexagonal positively locked into the damper blade.
7. Drive mechanism shall be concealed out of airstream to reduce pressure drop and noise.
8. Economizer damper is tested and rated based upon AMCA Publication 500-D.
9. RRS controls feature the Basic economizer controller with 24V actuator. Controls capable of Economizer Fault Detection and Diagnostics for code compliance.
10. Damper shall meet the leakage requirements of the International Energy Conservation Code by leaking less than 3 cfm/sq. ft. at 1" of static pressure and shall be AMCA licensed as a class 1A damper. Complies with reliability and performance requirements as specified by the California Energy Commission's Title 24 Standard and ASHRAE 90.1 2022. Economizer dampers shall be Ruskin Rooftop Systems ECD60 model.
11. Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXRX-DDC01)

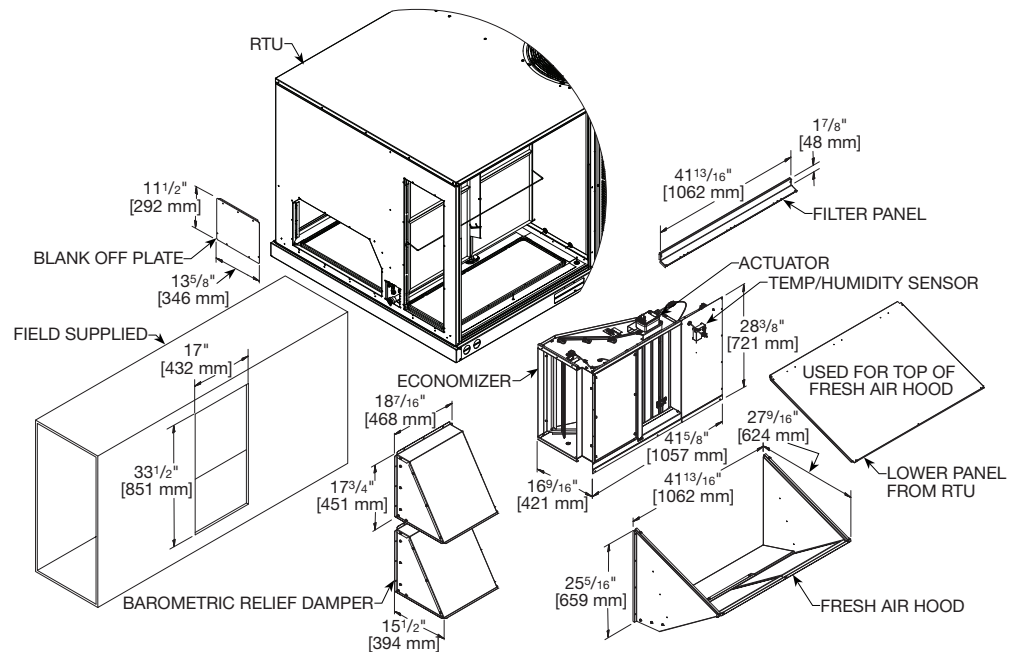

[] Designates Metric Conversions

NON-DDC ECONOMIZER W/SINGLE ENTHALPY (HORIZONTAL) RUSKIN ROOFTOP SYSTEMS ECONOMIZER WITH SIEMENS CONTROLLER

Factory or Field-Installed


RXRD-51MDHAM3

PD555460—Dual Enthalpy, Temperature and Humidity Sensor (for Siemens Controller)

RXXR-AR02—Sensor, Carbon Dioxide (Wall Mount)

These ultra-low leak economizer dampers meet the following minimum construction standards:

1. Frame shall be 14 to 24 gauge galvanized steel channel.
2. Damper blades are galvanized steel airfoil shaped, double skin construction of 14 gauge [2.0] equivalent thickness, 6" [152 mm] wide. Parallel action.
3. Blade edge seals shall be Ruskiprene™ type or equivalent suitable for -72°F [-60°C] to +275°F [+135°C] mechanically locked into the blade edge. Adhesive or clip-on type seals are unacceptable.
4. Jamb seals shall be flexible metal, compression type to prevent leakage between blade end and damper frame. Blade end overlapping frame is unacceptable.
5. Bearings shall be stainless steel or nylon bushing.
6. Axles shall be hexagonal positively locked into the damper blade.
7. Drive mechanism shall be concealed out of airstream to reduce pressure drop and noise.
8. Economizer damper is tested and rated based upon AMCA Publication 500-D.
9. Controls feature the Siemens controller with Siemens 24v actuator. Controls capable of Economizer Fault Detection and Diagnostics for code compliance.
10. Damper shall meet the leakage requirements of the International Energy Conservation Code by leaking less than 3 cfm/sq. ft. at 1" of static pressure and shall be AMCA licensed as a class 1A damper. Complies with reliability and performance requirements as specified by the California Energy Commission's Title 24 Standard and ASHRAE 90.1 2022. Economizer dampers shall be Ruskin Rooftop Systems ECD60 model.
11. Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXXR-DDC01)

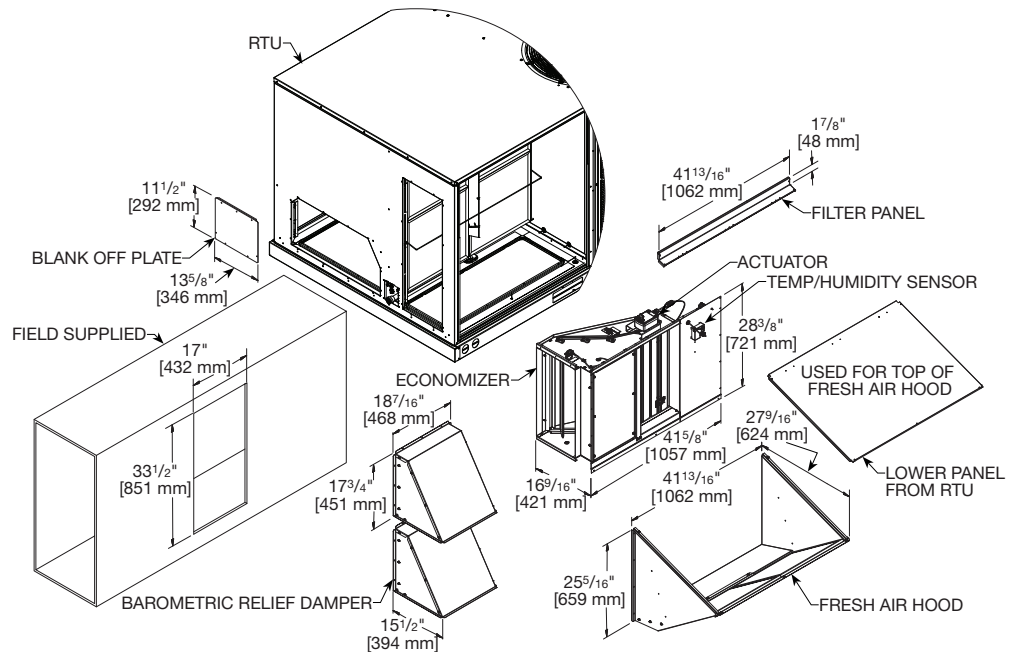

[] Designates Metric Conversions

ECONOMIZER UNIVERSAL DDC INTERFACE KIT


Available Factory or Field-Installed

RXRX-DDC01

- Allows any Non-DDC Economizer to be used with a ClearControl DDC model
- Mounts on the Economizer
- Provides Mounting location for Economizer Controller
- Provides wire management for excess wire


NOTE: Older DDC Models, prior to A2L, may require a field update to the ClearControl Software. The minimum version required is 3.15. A2L Models will come with software version 4.0 or higher.

HORIZONTAL FLOW DDC BRACKET SETUP

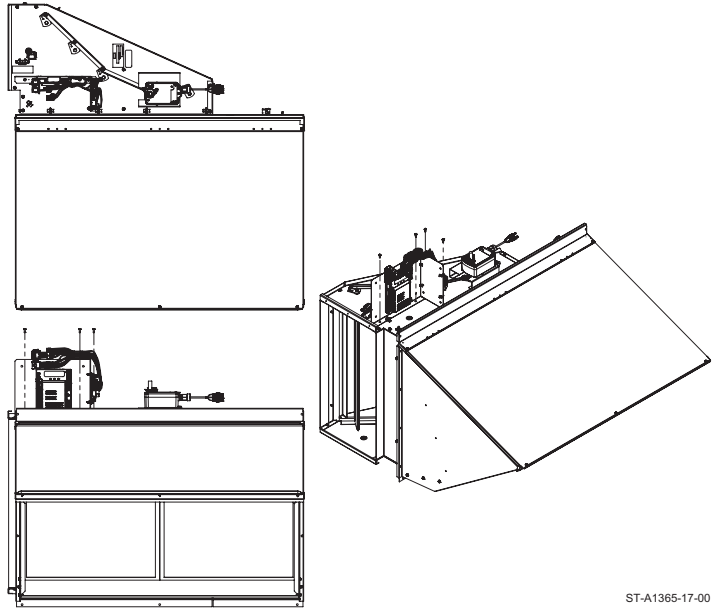

ST-A1365-17-00

DOWNFLOW ECONOMIZER DDC BRACKET SETUP

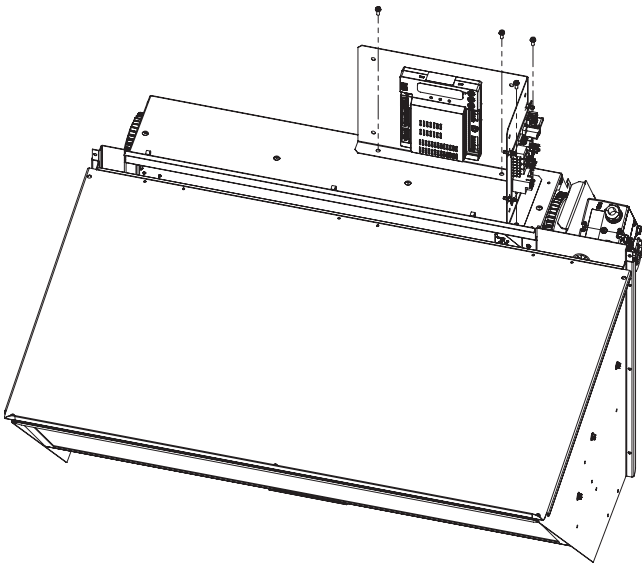

ST-A1365-13-01

FRESH AIR DAMPER

FRESH AIR DAMPER, MANUAL
RXRF-ADA1

DOWNFLOW APPLICATION

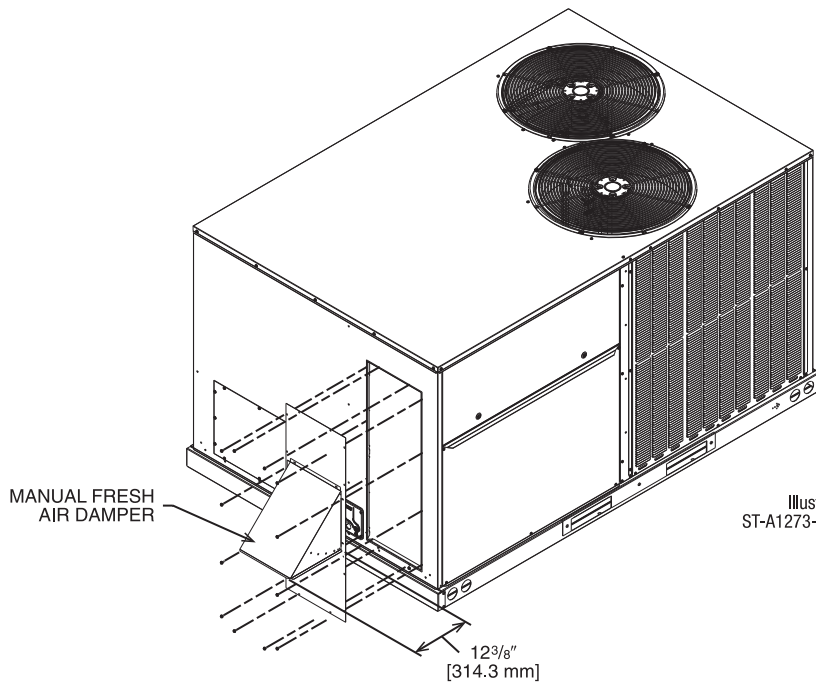


Illustration
ST-A1273-03-00

HORIZONTAL APPLICATION

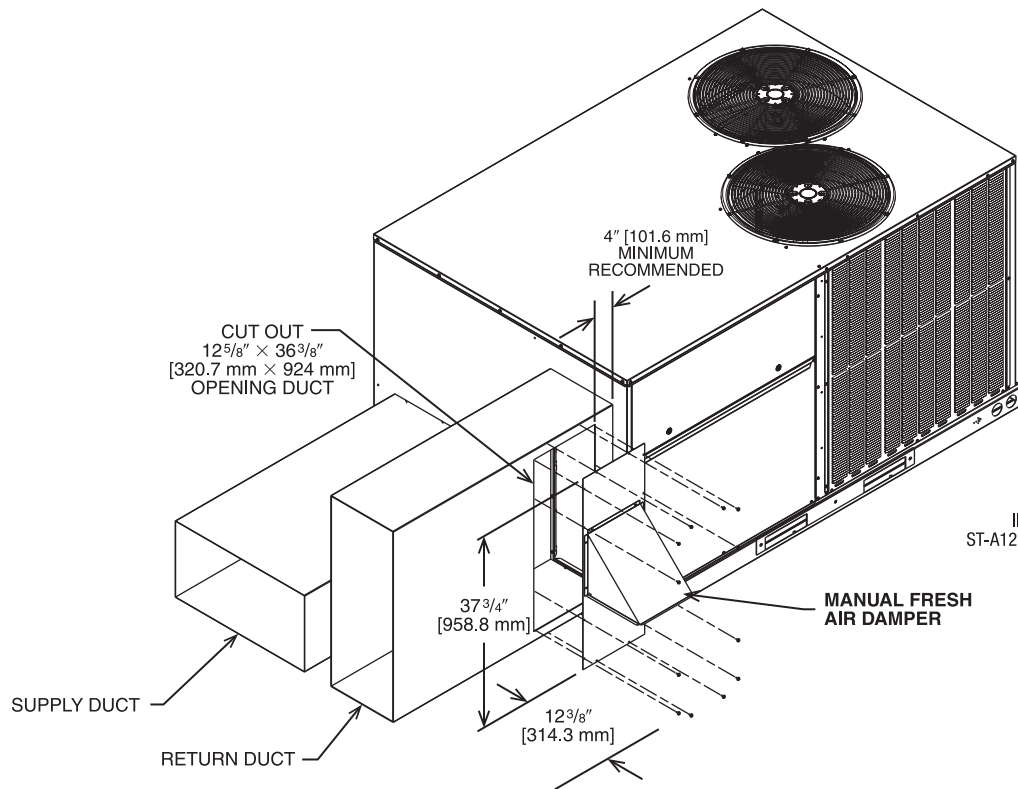


Illustration
ST-A1273-04-00

[] Designates Metric Conversions

FRESH AIR DAMPER (CONTINUED)

FRESH AIR DAMPER, MOTORIZED RXRF-ADB1

FRESH AIR DAMPER, MOTORIZED (DDC) RXRF-ADC1 (Modulating Motor Kit with position feedback for DDC Models)

- Features **Honeywell** Controls
- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Low Leakage Dampers
- Slip-In Design for Easy Installation
- Plug-In Polarized 12-pin and 4-pin Electrical Connections
- Pre-Configured—No Field Adjustments Necessary
- Addition of Dual Enthalpy Upgrade Kit allows limited economizer function
- CO₂ Sensor Input Available for Demand Control Ventilation (DCV)
- All fresh air damper functions can be viewed at the RTU-C unit controller display
- If connected to a Building Automation System (BAS), all fresh air damper functions can be viewed on the (BAS), or 16 x 2 LCD screen
- If connected to thermostat, all fresh air damper functions can be viewed on 16 x 2 LCD screen

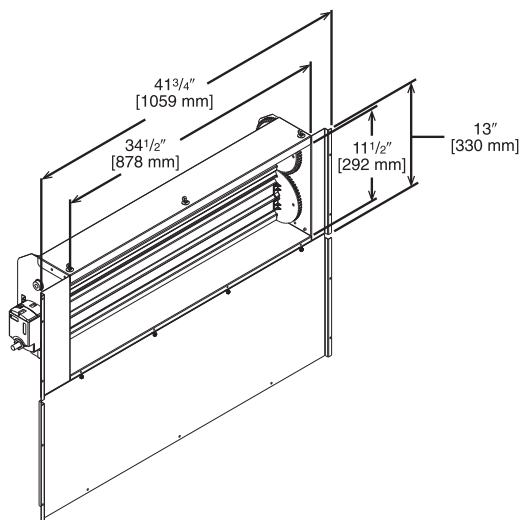


Illustration
ST-A1273-10-00

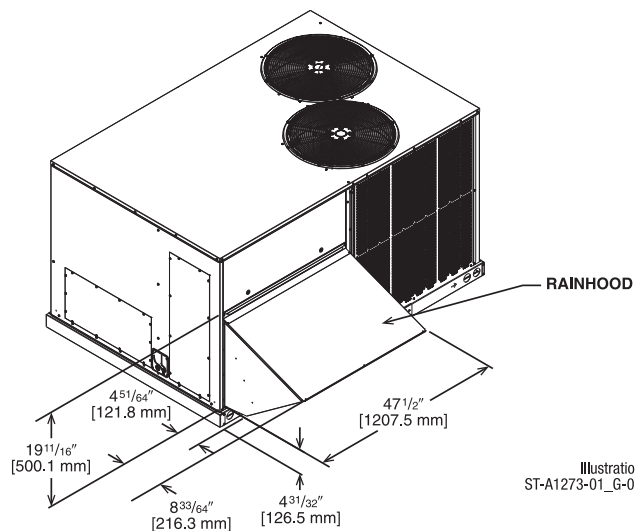


Illustration
ST-A1273-01_G-00

[] Designates Metric Conversions

POWER EXHAUST KIT, CONVERTIBLE

RXXR-CDF01*

*Voltage Code: C or D

- Convertible between vertical airflow and horizontal airflow
- Compatible with all D-cabinet economizers
- **Economizer sold separately**

VERTICAL AIRFLOW INSTALLATION

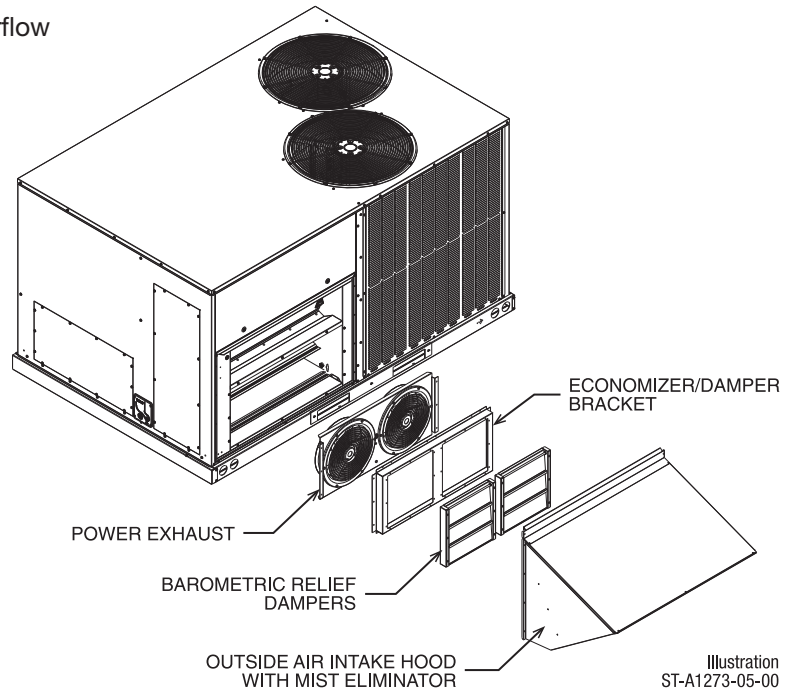


Illustration
 ST-A1273-05-00

HORIZONTAL AIRFLOW INSTALLATION

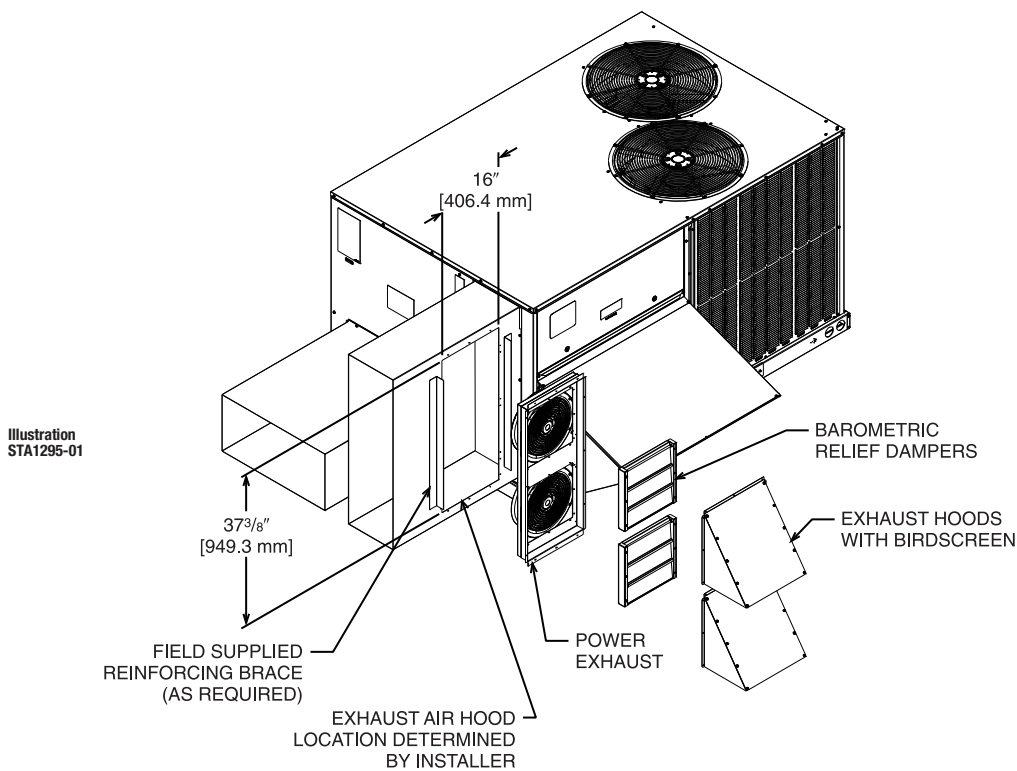


Illustration
 STA1295-01

Model No.	No. of Fans	Volts	Phase	HP (ea.)	CFM [L/s]*	RPM	FLA (ea.)	LRA (ea.)
RXXR-CDF01C	2	208/230	1	0.47	2200	3000	1.55	1.1
RXXR-CDF01D	2	460	3	0.40	1970	2750	0.51	1.9

*CFM is per fan at 0" w.c. external static pressure.


[] Designates Metric Conversions

POWER EXHAUST KIT FOR DOWNFLOW ECONOMIZER

RXXR-RDF01*

*Voltage Code: C, D, or Y

- Shipped completely assembled
- All wiring from control box to economizer is supplied
- Color coordinated with the unit
- Fully insulated with 1" 1.5 lb. fiberglass insulation
- Motors are factory wired and tested
- When using this power exhaust system, clearance between the bottom of the unit and finished roof deck should be a minimum of 10 inches. Some applications may require a taller roof curb for proper installation
- **Economizer Sold Separately**

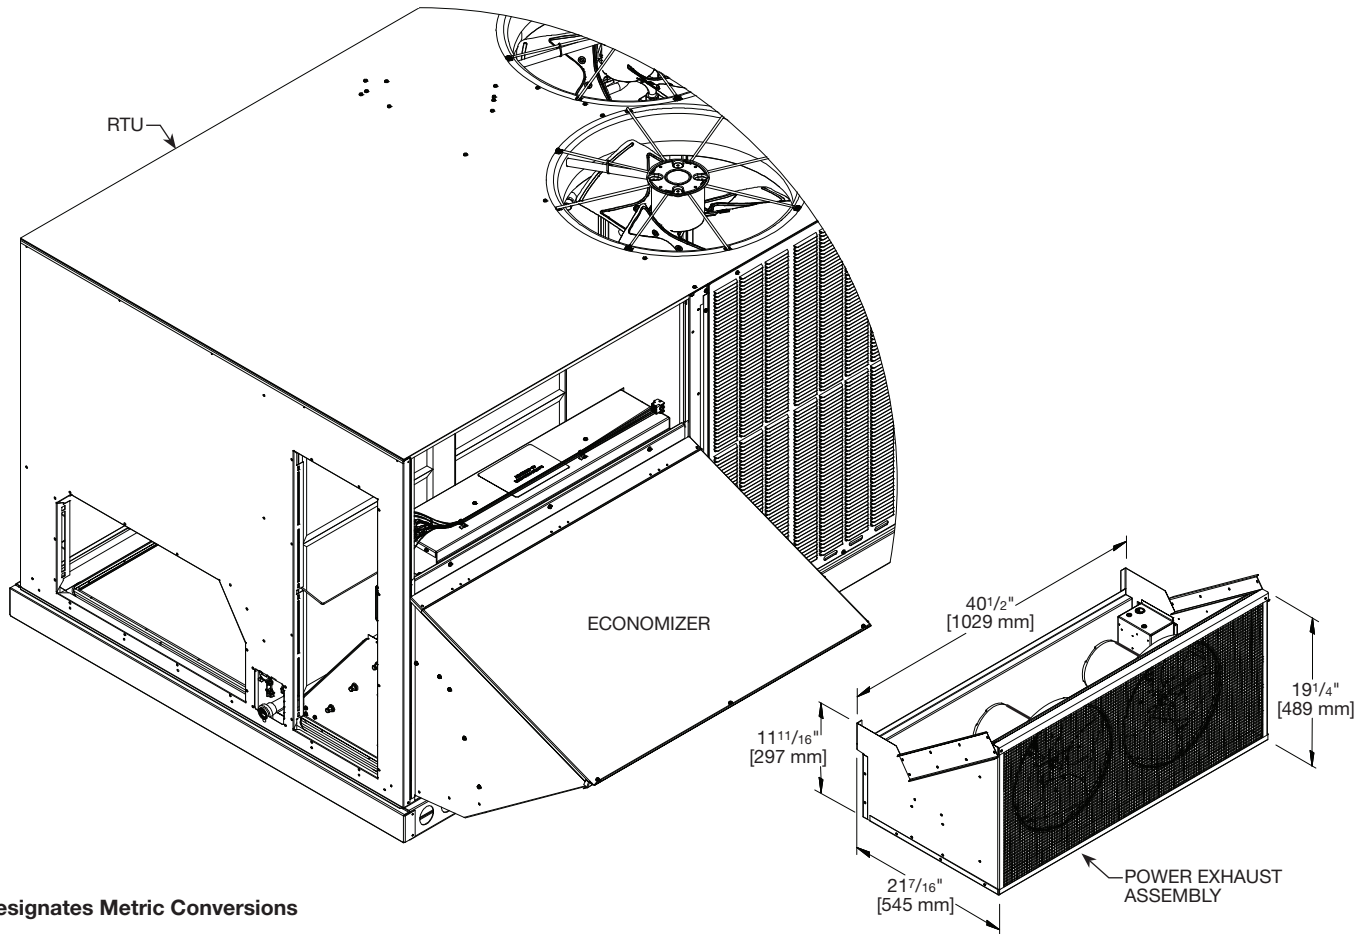

[] Designates Metric Conversions


Model No.	Volt	Phase	Motor				Unit			@ 0.1 CFM	
			HP	RPM	LRA	Qty.	Cir. Qty.	FLA	MCA		Fuse Size
RXXR-RDF01C	208/230	1	1/2	1625	5.86	2	1	5.40	6.75	8	4013
RXXR-RDF01D	460				3.33			2.68	3.35	4	
RXXR-RDF01Y	575				2.52			2.12	2.65	3	

POWER EXHAUST KIT FOR HORIZONTAL ECONOMIZER

RXXR-RDF03*

*Voltage Code: C, D, or Y

- Shipped completely assembled
- All wiring from control box to economizer is supplied
- Color coordinated with the unit
- Fully insulated with 1" 1.5 lb. fiberglass insulation
- Motors are factory wired and tested
- When using this power exhaust system, clearance between the bottom of the unit and finished roof deck should be a minimum of 10 inches. Some applications may require a taller roof curb for proper installation
- **Economizer with Relief Hood Sold Separately**

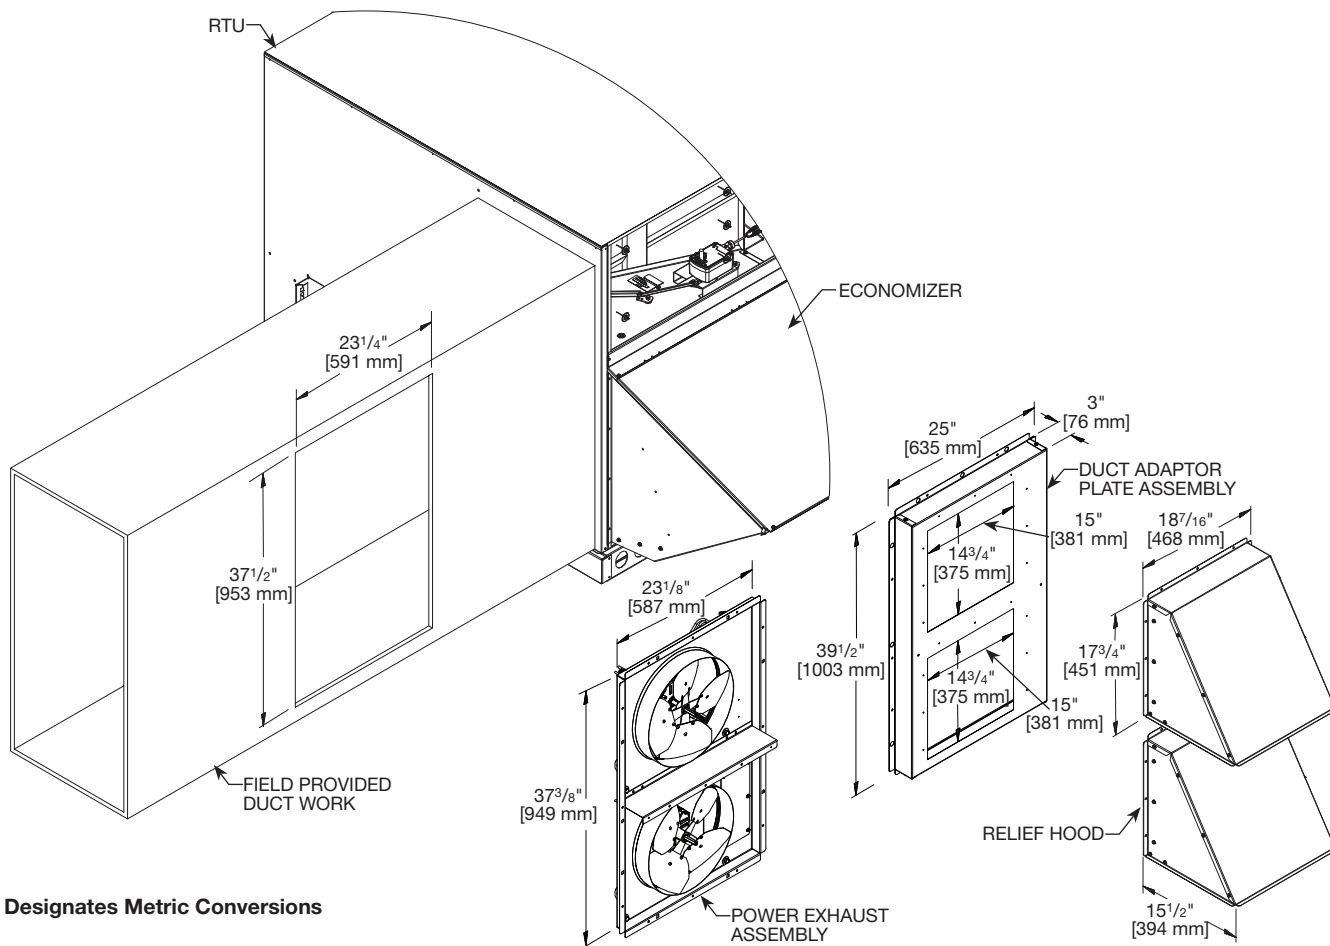


[] Designates Metric Conversions

Model No.	Volt	Phase	Motor				Unit				@ 0.1 CFM
			HP	RPM	LRA	Qty.	Cir. Qty.	FLA	MCA	Fuse Size	
RXXR-RDF03C	208/230	1	1/2	1625	5.86	1	1	2.70	3.38	6	2013
RXXR-RDF03D	460				3.33			1.34	1.68	3	
RXXR-RDF03Y	575				2.52			1.06	1.33	2	

ROOFCURBS (Full Perimeter)

- Ruud’s roofcurb design can be utilized on all 7.5-12.5 ton [26.4-44.0 kW] RGED models
- Two available heights (14" [356 mm] and 24" [610 mm]) for ALL models
- Quick assembly corners for simple and fast assembly
- Opening provided in bottom pan to match the “Thru the Curb” electrical, gas piping, condensate, connection opening provided on the unit base pan
- 1" [25 mm] x 4" [102 mm] Nailers provided
- Sealing gasket (40' [12.2 m]) provided with Roofcurb
- Packaged for easy field assembly

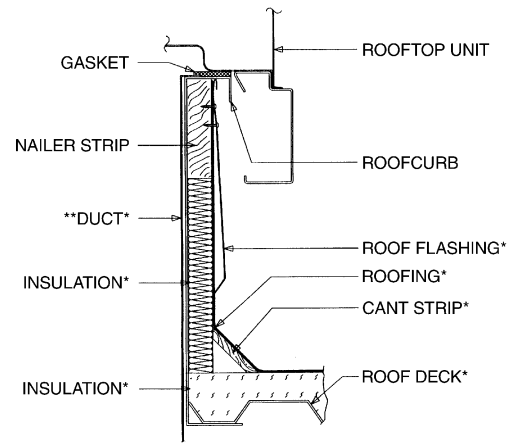

*BY CONTRACTOR
 **FOR INSTALLATION OF DUCT AS SHOWN, USE RECOMMENDED DUCT SIZES FROM ROOFCURB INSTALLATION INSTRUCTIONS. FOR DUCT FLANGE ATTACHMENT TO UNIT, SEE UNIT INSTALLATION INSTRUCTIONS FOR RECOMMENDED DUCT SIZES.

ROOFCURBS

View	Roofcurb Model	Height of Curb
A	RXKG-DDD14	14" [356 mm]
A	RXKG-DDD24	24" [610 mm]

Illustration
 ST-A0743-02

ROOFCURB INSTALLATION


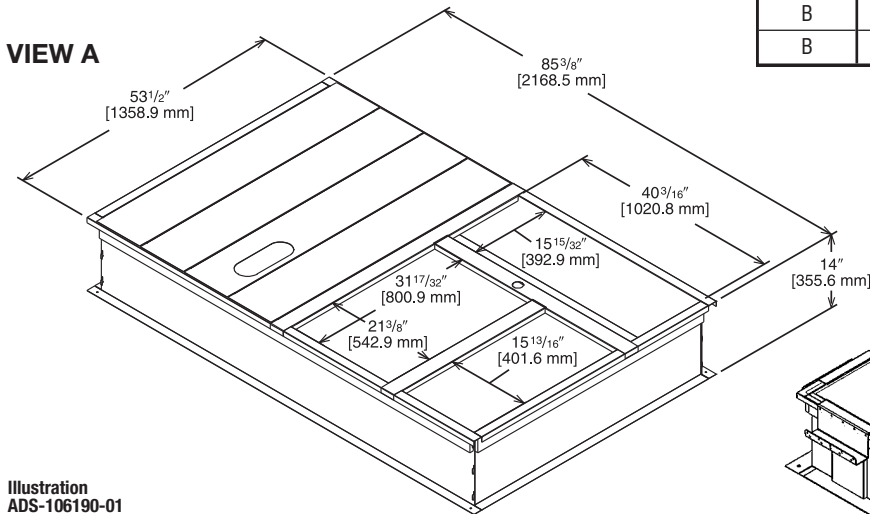


Illustration
 ADS-106190-01

WELDED ROOFCURBS

View	Roofcurb Model	Dimensions
B	RXKG-SD14	85.375" x 53.5" x 14.0"
B	RXKG-SD24	85.375" x 53.5" x 24.0"

WELDED ROOFCURB VIEW B

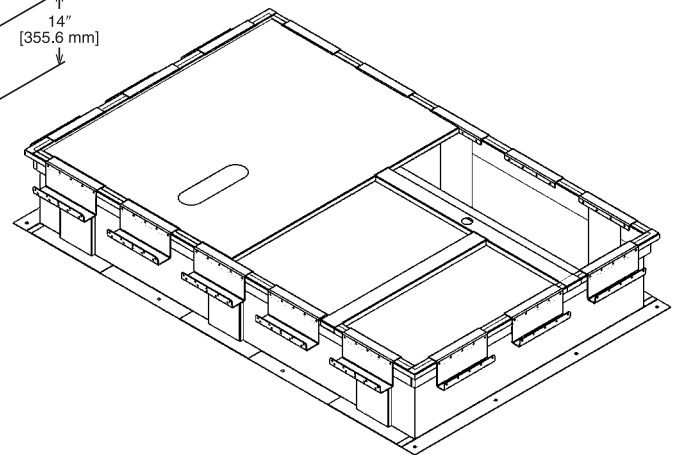

- State of Florida Approved: Approval Number FL 26981.1 for Technical Evaluation Report TER-20-28788 certifies the HVAC Unit and mounting methods for high wind resistance are compliant per Florida Building Code.
- OSHPD Approved: State of California Product Approval Number OSP-06660-TEMPO0 for Technical Evaluation Report 1700876-CR-001-RO certifies the HVAC Unit and MicroMetl Welded Roof Curb is earthquake resistance compliant and approved for use per International Code Council – Evaluation Service AC156, IBC, AND CBC building code standards.

[] Designates Metric Conversions




ROOFCURB ADAPTERS

RXRX-DDCAE

Illustration
ADS-106176-01
SHEET 2


APPROXIMATE STATIC PRESSURE DROP

@2,000 = 0.06" w.g.
@3,000 = 0.12" w.g.
@4,000 = 0.22" w.g.
@5,000 = 0.36" w.g.

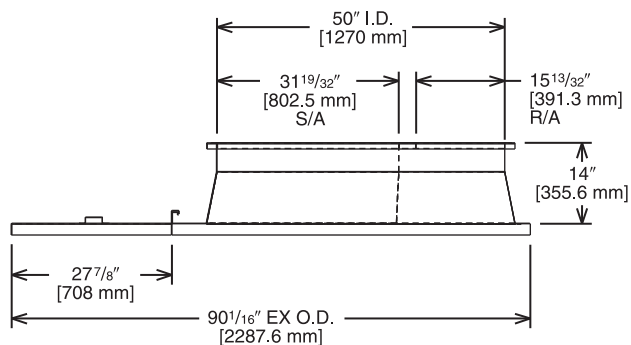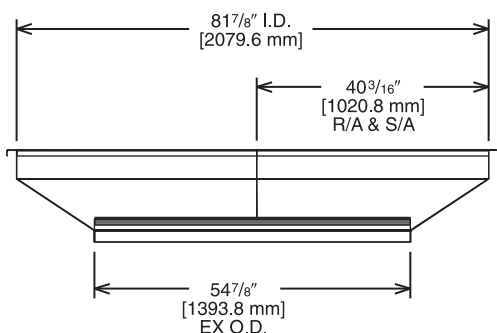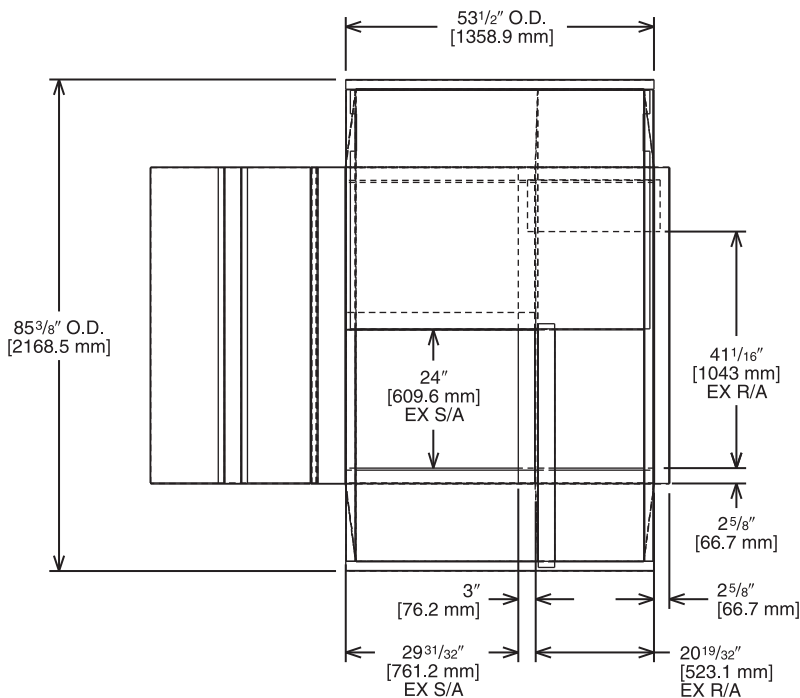

TOP VIEW

Illustration
ADS-106176-01
SHEET 1

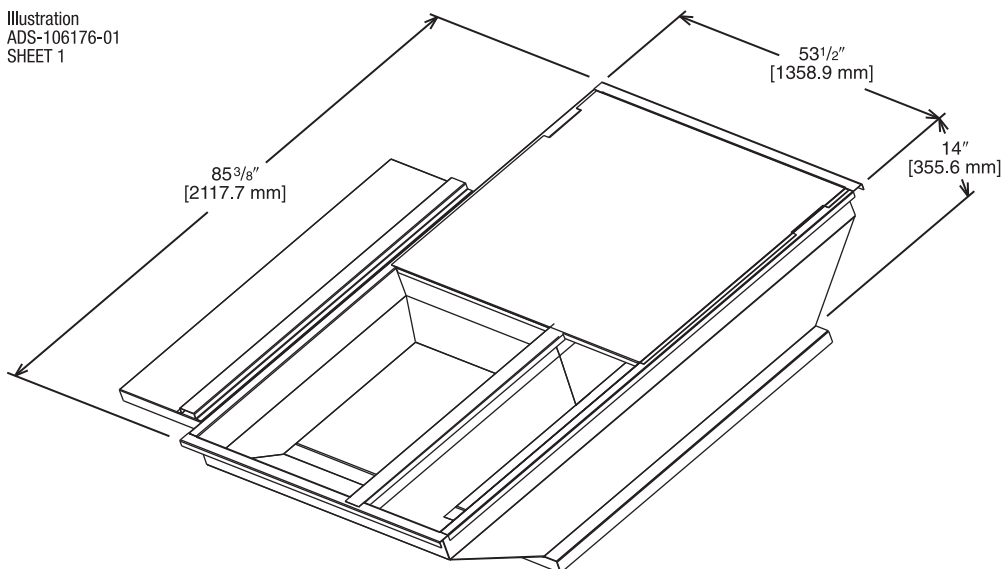

[] Designates Metric Conversions

Guide Specifications RGEDYB— 090-150

You may copy this document directly into your building specification. This specification is written to comply with the 2016 version of the “master format” as published by the Construction Specification Institute. www.csinet.org.

GAS HEAT PACKAGED ROOFTOP

HVAC Guide Specifications

Size Range: 7¹/₂ to 12¹/₂ Nominal Tons

1.00 General:

- A. Outdoor, rooftop mounted, electrically controlled, heating and cooling unit utilizing a(n) hermetic scroll compressor(s) for cooling duty and heat pump for heating duty.
- B. Factory assembled, single-piece heating and cooling rooftop unit. Contained within the unit enclosure shall be all factory wiring, piping, controls, and special features required prior to field start-up.
- C. Unit shall use environmentally safe, R-454B refrigerant.
- D. Unit shall be installed in accordance with the manufacturer’s instructions.
- E. Unit must be selected and installed in compliance with local, state, and federal codes.
- F. Model and serial data shall be printed inside the control box.

1.01 Quality Assurance:

- A. Unit meets ASHRAE 90.1 2022 minimum efficiency requirements.
- B. Unit shall be rated in accordance with AHRI Standards 340/360.
- C. Unit shall be designed to conform to ASHRAE 15.
- D. Unit shall be UL-tested and certified in accordance with Standards and UL-listed and certified under Canadian standards as a total package for safety requirements.
- E. Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation.
- F. Unit casing shall be capable of withstanding 1000-hour salt spray exposure per ASTM B117 (scribed specimen).
- G. Roof curb shall be designed to conform to NRCA Standards.
- H. Unit shall be subjected to a completely automated run test on the assembly line. The data for each unit will be stored at the factory, and must be available upon request.
 - I. Unit shall be designed in accordance with UL Standard 60335-2-40 4th Edition, including tested to withstand rain.
 - J. Unit shall be constructed to prevent intrusion of snow and tested to prevent snow intrusion into the control box up to 40mph.

1.02 Manufacturer Qualifications

- A. Unit shall be designed in accordance with ISO 9001:2015, and shall be manufactured in a facility registered by ISO 9001:2015.

1.03 Installer Qualifications

- A. The installer shall be trained to install and service equipment with A2L refrigerants.

1.04 Delivery, Storage, and Handling:

- A. Unit shall be stored and handled per manufacturer’s recommendations.
- B. Lifted by crane requires either shipping top panel or spreader bars.
- C. Unit shall only be stored or positioned in the upright position.

1.05 Unit Cabinet:

- A. Shall be constructed of galvanized steel.
- B. Unit cabinet exterior paint shall be pre-painted steel.
- C. The sheet-metal cabinet shall be constructed of 18-gauge material for structural components with an underlying coat of G90.
- D. Evaporator fan compartment interior cabinet insulation shall conform to AHRI Standards 210 or 360 minimum exterior sweat criteria. Interior surfaces shall be insulated with a minimum 1/2-in. thick, 1.6 lbs density, flexible fiberglass insulation, foil faced on the air side. Aluminum foil-faced fiberglass insulation shall be used in the gas heat compartment.
- E. Shall utilize uniform screw sizing.
- F. Base of unit shall have a location for thru-the-base gas and electrical connections standard.
- G. Base Rail:
 - i. Unit shall have base rails on a minimum of 4 sides.
 - ii. Holes shall be provided in the base rails for rigging shackles to facilitate maneuvering and overhead rigging.
 - iii. Holes shall be provided in the base rail for moving the rooftop for fork truck.
 - iv. Base rail shall be a minimum of 14 gauge thickness.

- H. Condensate pan and connections:
 - i. Shall be a sloped condensate drain pan made of a non-corrosive material and be removable for cleaning.
 - ii. Shall comply with ASHRAE Standard 62.
 - iii. Shall use a 3/4" NPT drain connection, possible either through the bottom or side of the drain pan. Connection shall be made per manufacturer's recommendations.
 - iv. Shall be able to be easily removed.
 - v. Shall be separate from the coil.
 - vi. Standard factory installed condensate overflow sensor.
- I. Top panel
 - i. Shall be a single piece top panel over indoor section.
- J. Gas Connections:
 - i. All gas piping connecting to unit gas valve shall enter the unit cabinet at a single location on side of unit (horizontal plane).
 - ii. Thru-the-base-capability:
 - a. Standard unit shall have a thru-the-base gas-line locations using a continuous raised, flange around opening in the basepan.
 - b. No basepan penetration, other than those authorized by the manufacturer, is permitted.
- K. Electrical Connections:
 - i. All unit power wiring shall enter unit cabinet via a single, factory-prepared, continuous raised flange opening in the basepan.
 - ii. Thru-the-base capability:
 - a. Standard unit shall have a thru-the-base electrical location(s) using a raised, continuous raised flange opening in the basepan.
 - b. No basepan penetration, other than those authorized by the manufacturer, is permitted.
- L. Component access panels (standard):
 - i. Cabinet panels shall be easily opened for servicing.
 - ii. Panels covering control box, indoor fan, indoor fan motor, gas components (where applicable), and filters shall have hinges with 1/4 turn fasteners on units with factory-installed hinged option.
 - iii. 1/4 turn fasteners shall be permanently attached.
- 1.06 Operating Characteristics:
 - A. Unit shall be capable of starting and running at 115°F (46°C) ambient outdoor temperature, meeting maximum load criteria of AHRI Standard 340/360 at ± 10% voltage.
 - B. Compressor with standard controls shall be capable of operation down to 50°F (10°C), ambient outdoor temperatures. Low ambient accessory kit is necessary if mechanically cooling at ambient temperatures to 0°F (-17.7°C).
 - C. Unit shall discharge supply air vertically or horizontally as shown on contract drawings.
 - D. Unit shall be factory configured for vertical supply & return configurations.
 - E. Unit shall be field convertible from vertical to horizontal configuration.
 - F. Unit shall be capable of mixed operation: vertical supply with horizontal return or horizontal supply with vertical return.
- 1.07 Electrical Requirements
 - A. Main power supply voltage, phase, and frequency must match those required by the manufacturer.
- 1.08 Evaporator fan compartment
 - A. Interior cabinet surfaces shall be insulated with a minimum 1/2-in. thick, minimum 1.6 LB density, flexible fiberglass insulation bonded with foil face on the air side.
 - B. Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation.
 - C. Insulation shall also be mechanically fastened with welded pin and retainer washer.
- 1.09 Thermostats
 - A. Thermostat must:
 - i. Energize both "W" and "G" when calling for heat.
 - ii. Have capability to energize 2 different stages of cooling, and 1 stage of heating.
 - iii. Include capability for occupancy scheduling.

- 1.10 Electronic Control System for HVAC:
 - A. Shall be complete with self-contained low-voltage control circuit protected by a fuse on the 24-V transformer side.
 - B. Shall utilize color-coded wiring.
 - C. The heat exchanger shall be controlled by the Core Command microprocessor. See heat exchanger section of this specification.
 - D. Unit shall include self-contained low-voltage control circuit protected by a fuse on the 24-V transformer side.
 - E. Unit shall include a minimum of one 8-pin screw terminal connection board for connection of control wiring.
 - F. Unit control board shall be provided with 7 segment readout via LCD display for status and diagnostics.
- 1.10.01 Safeties
 - A. Compressor over-temperature, over current.
 - B. Standard Low-pressure switch:
 - i. Units shall have low pressure, loss of charge automatic reset device that will shut off compressor when tripped.
 - ii. Low pressure control
 - a. Provides active protection in both heating and cooling modes at all outdoor ambient temperatures. The low pressure control is an automatic reset type and opens at approximately 15 psig and closes at approximately 40 psig. Operation is slightly different between cooling and heating modes.
 - C. Standard High-pressure switch:
 - i. Unit shall be equipped with high pressure switch device that will shut off compressor when tripped.
 - ii. High pressure control
 - a. The high pressure control is an automatic reset type and opens at approximately 610 psig and closes at approximately 420 psig. The compressor and fan motor will stop when the high pressure control opens and will start again if the high side pressure drops to approximately 420 psig where the automatic reset high pressure control resets. If the high pressure control opens 3 times within a particular call for heating or cooling operation, the defrost control will lock out compressor and outdoor fan operation.
 - D. Automatic reset, motor thermal overload protector.
 - E. The unit must be permanently grounded.
 - F. Components are not compatible between different refrigerants. Do not use R-410A service equipment or components on R-454B equipment. System or part failure could occur.
 - G. Heating section shall be provided with the following minimum protections:
 - i. High-temperature limit switches.
 - ii. Induced draft motor pressure switch.
 - iii. Flame rollout switch.
 - iv. Flame proving controls.
- 1.11 Standard Filter Section:
 - A. Shall consist of factory-installed, low velocity, throwaway 2-in. thick fiberglass filters of commercially available sizes.
 - B. Unit shall use only one filter size. Multiple sizes are not allowed.
 - C. Filter face velocity shall not exceed 365 fpm at nominal airflows.
 - D. Filters shall be accessible through an access panel with “no-tool” removal as described in the unit cabinet section of the specification.
 - E. Filters access is specified in the unit cabinet section of this specification.
 - F. Filters shall be held in place by metal rods, facilitating easy removal and installation.
- 1.12 Coils
 - A. Standard Aluminum/MicroChannel Coils:
 - i. Standard evaporator and condenser coils shall be aluminum.
 - ii. Evaporator and condenser coils shall be leak tested to 150 psig, pressure tested to 400 psig, and qualified to burst test at 2,200 psi.
- 1.13 Refrigerant Components:
 - A. Refrigerant circuit shall include the following control, safety, and maintenance features:
 - i. TXV metering system shall prevent mal-distribution of two-phase refrigerant.
 - ii. Refrigerant filter drier.
 - iii. Service gauge connections on suction and discharge lines.
 - iv. External pressure gauge ports access shall be located in front exterior of cabinet.
 - v. External gauge ports shall be lockable.

- B. Compressors:
 - i. 090-120 units shall use one fully hermetic, 2-stage scroll compressor
 - ii 150 units shall use a tandem set of fully hermetic, single stage compressors.
 - iii. Compressor motors shall be cooled by refrigerant gas passing through motor windings.
 - iv. Compressors shall be internally protected from high discharge temperature conditions.
 - v. Compressors shall be protected from an over-temperature and over-ampereage conditions by an internal, motor overload device.
 - vi. Compressor shall be factory mounted on rubber grommets.
 - vii. Compressor motors shall have internal line break thermal and current overload protection.
 - viii. Crankcase heaters shall not be required for normal operating range.
 - ix. Compressor shall have molded electrical plug.

1.14 Evaporator Fan and Motor:

- A. Evaporator Fan Motor:
 - i. Shall have permanently lubricated bearings.
 - ii. Shall have inherent automatic-reset thermal overload protection.
 - iii. Shall have a maximum continuous bhp rating for continuous duty operation; no safety factors above that rating shall be required.
- B. Direct Drive Evaporator Fan:
 - i. Belt drive shall include an adjustable-pitch motor pulley.
 - ii. Shall use sealed, permanently lubricated ball-bearing type.
 - iii. Blower fan shall be double-inlet type with forward-curved blades.
 - iv. Shall be constructed from steel with a corrosion resistant finish and dynamically balanced.
- C. Blower Assembly:
 - i. Entire assembly shall be able to slide out completely.
 - ii. Shall be able to slide-out without the removal of the roof and condenser fan motors.

1.15 Condenser Fans and Motors:

- A. Condenser Fan Motors:
 - i. Shall be a totally enclosed motor.
 - ii. Shall use permanently lubricated bearings.
 - iii. Shall have inherent thermal overload protection with an automatic reset feature.
 - iv. Shall use a shaft-down design. Shaft-up designs including those with “rain-slinger devices” shall not be allowed.
- B. Condenser Fans:
 - i. Shall be a direct-driven propeller type fan.
 - ii. Shall have blades riveted to corrosion-resistant steel spiders and shall be dynamically balanced.

1.16 RTU-C Controller:

- A. Shall be ASHRAE 62-2001 compliant.
- B. Shall accept 18-32VAC input power.
- C. Shall have an operating temperature range from -40°F (-40°C) to 158°F (70°C), 10%– 95% RH (non-condensing).
- D. Controller shall accept the following inputs: space temperature, setpoint adjustment, outdoor air temperature, indoor air quality, outdoor air enthalpy, fire shutdown, return air enthalpy, fan status, remote time clock/door switch.
- E. Shall accept a CO₂ sensor in the conditioned space, and be Demand Control Ventilation (DCV) ready.
- F. Shall provide the following outputs: Economizer, fan, cooling stage 1, cooling stage 2, heat stage 1, heat stage 2, exhaust, occupied.
- G. Unit shall provide surge protection for the controller through a circuit breaker.
- H. Shall have a field installed communication card allowing the unit to be able to communicate at a Baud rate of 19.2K or faster.
- I. Shall have an LED display independently showing the status of activity on the communication bus, and processor operation.
- J. Optional field installed BACnet plug-in communication card which includes an EIA-485 protocol communication port, or an optional field installed LonWorks plug-in communications card.
- K. Software upgrades will be accomplished by local download. Software upgrades through chip replacements are not allowed.
- L. Shall be shock resistant in all planes to 5G peak, 11ms during operation, and 100G peak, 11ms during storage.
- M. Shall be vibration resistant in all planes to 1.5G @ 20-300 Hz.
- N. Shall support a bus length of 4000 ft max, 60 devices per 1000 ft section, and 1 RS-485 repeater per 1000 ft sections.

- 1.17 Open Protocol, Direct Digital Controller:
- A. Shall be ASHRAE 62-2001 compliant.
 - B. Shall accept 18-30VAC, 50-60Hz, and consumer 15VA or less power.
 - C. Shall have an operating temperature range from -40°F (-40°C) to 130°F (54°C), 10% - 90% RH (non-condensing).
 - D. Shall have either a field installed BACnet plug-in communication card which includes an EIA-485 protocol communication port, or a field installed LonWorks plug-in communications card.
 - E. The BACnet plug in communication card shall include built-in protocol for BACNET (MS/TP and PTP modes).
 - F. The LonWorks plug in communication card shall include the Echelon processor required for all Lon applications.
 - G. Shall allow access of up to 62 network variables (SNVT) and be compatible with all open controllers.
 - H. Baud rate Controller shall be selectable through the EIA-485 protocol communication port.
 - I. Shall have an LED display independently showing the status of serial communication, running, errors, power, all digital outputs, and all analog inputs.
 - J. Shall accept the following inputs: space temperature, setpoint adjustment, outdoor air temperature, indoor air quality, outdoor air enthalpy, compressor lock-out, fire shutdown, enthalpy switch, and fan status/filter status/humidity/remote occupancy.
 - K. Shall provide the following outputs: economizer, fan, cooling stage 1, cooling stage 2, heat stage 1, heat stage 2, exhaust.
 - L. Software upgrades will be accomplished by either local or remote download. No software upgrades through chip replacements are allowed.
 - M. Shall be natively equipped with Modbus communication protocol.
- 1.18 Gas Heat Compartment:
- A. Aluminum foil-faced fiberglass insulation shall be used.
 - B. Insulation and adhesives shall meet NFPA 90A requirements for flame spread and smoke generation.
 - C. Insulation shall also be mechanically fastened with welded pin and retainer washer.
- 1.19 Gas Heat:
- A. Shall have standard two stage gas heat.
 - B. Heat exchanger shall be an induced draft design. Positive pressure heat exchanger designs shall not be allowed.
 - C. Shall incorporate a direct-spark ignition system and redundant main gas valve.
 - D. Heat exchanger design shall allow combustion process condensate to gravity drain; maintenance to drain the gas heat exchanger shall not be required.
 - E. Gas supply pressure at the inlet to the rooftop unit gas valve must match that required by the manufacturer.
 - F. The heat exchanger shall be controlled by the Core Command microprocessor.
 - i. The CoreCommand board shall notify users of fault using two 7 segment displays.
 - G. Standard Heat Exchanger construction:
 - i. Heat exchanger shall be of the tubular-section type constructed of a minimum of 20-gauge steel coated with a nominal 1.2 mil aluminum-silicone alloy for corrosion resistance.
 - ii. Burners shall be of the in-shot type constructed of aluminum-coated steel.
 - iii. Burners shall incorporate orifice for rated heat output up to 2,000 ft. (610m) elevation with a gas heating valve of 1050. Alternate orifices may be required depending on local gas heating valves and elevations.
 - iv. Each heat exchanger tube shall contain restrictions similar to dimples for increased heating effectiveness.
 - H. Optional Stainless Steel Heat Exchanger construction:
 - i. Use energy saving, direct-spark ignition system.
 - ii. Use a redundant main gas valve.
 - iii. Burners shall be of the in-shot type constructed of aluminum-coated steel.
 - iv. All gas piping shall enter the unit cabinet at a single location on side of unit (horizontal plane).
 - v. The optional stainless steel heat exchanger shall be of the tubular-section type, constructed of a minimum of 20-gauge type 409 stainless steel.
 - vi. Type 409 stainless steel shall be used in heat exchanger tubes.
 - vii. Complete stainless steel heat exchanger allows for greater application flexibility.

- I. Induced draft combustion motor and blower:
 - i. Shall be a direct-drive, single inlet, forward-curved centrifugal type.
 - ii. Shall be made from steel with a corrosion-resistant finish.
 - iii. Shall be permanently lubricated sealed bearings.
 - iv. Shall have inherent thermal overload protection.
 - v. Shall have an automatic reset feature.

1.20 Special Features:

A. Integrated Economizers

- i. Integrated parallel modulating blade design type capable of simultaneous economizer and compressor operation.
- ii. Independent modules for vertical or horizontal return configurations shall be available. Vertical return modules shall be available as a factory installed option.
- iii. Damper blades shall be galvanized steel. Plastic or composite blades on intake or return shall not be acceptable.
- iv. Shall include all hardware and controls to provide free cooling with outdoor air when temperature and/or humidity are below setpoints.
- v. Shall be equipped with driven dampers for both the outdoor ventilation air and the return air for positive air stream control.
- vi. Shall be equipped with low-leakage dampers, not to exceed 2% leakage at 1 in. wg pressure differential.
- vii. Shall be capable of introducing up to 100% outdoor air.
- viii. Shall be equipped with a barometric relief damper capable of relieving up to 100% return air.
- ix. Shall be designed to close damper(s) during loss-of-power situations with spring return built into motor.
- x. Enthalpy sensor shall be provided as standard. Outdoor air sensor set point shall be adjustable and shall range from 40 to 100°F / 4 to 38°C. Additional sensor options shall be available as accessories.
- xi. The economizer controller shall also provide control of an accessory power exhaust unit function. Factory set at 70%, with a range of 0% to 100%.
- xii. The economizer shall maintain minimum airflow into the building during occupied period and provide design ventilation rate for full occupancy. A remote potentiometer may be used to override the damper set point.
- xiii. Dampers shall be completely closed when the unit is in the unoccupied mode.
- xiv. Economizer controller shall accept a 2-10Vdc CO₂ sensor input for IAQ/DCV control. In this mode, dampers shall modulate the outdoor-air damper to provide ventilation based on the sensor input.
- xv. Economizer controller shall provide indications when in free cooling mode, in the DCV mode, or the exhaust fan contact is closed.
- xvi. Economizer wire harness will have provision for smoke detector available in supply and return options.
- xvii. Shall provide fault detection and diagnostics (FDD) system in accordance with local code. Faults shall be communicated out on an alarm signal.

B. Manual damper

- i. Manual damper package shall consist of damper, air inlet screen, and rain hood which can be preset to admit up to 50% outdoor air for year round ventilation.

C. Liquid Propane (LP) Conversion Kit (sold separately)

- i. Kit shall contain all the necessary hardware and instructions to convert a standard natural gas unit for use with liquefied propane, up to 2000 ft (610m) elevation.

D. Condenser Coil Hail Guard Assembly:

- i. Shall protect against damage from hail.
- ii. Shall be louvered style.

E. Unit-Mounted, Non-Fused Disconnect Switch

- i. Shall be factory or field-installed.
- ii. Shall be internally mounted with external access.
- iii. National Electric Code (NEC) and UL approved non-fused switch shall provide unit power shutoff.
- iv. Shall be accessible from outside the unit.
- v. Shall provide local shutdown and lockout capability.

E. Convenience Outlet

- i. Non-Powered convenience outlet.
- ii. Shall be powered from a separate 115-120v power source.
- iii. A transformer shall not be included.
- iv. Shall be field-installed and internally mounted with easily accessible 115-v female receptacle.
- v. Shall include 15 amp GFI receptacle with independent fuse protection.
- vi. Shall be accessible from outside the unit.

F. Flue

- i. Flue Discharge deflector shall direct unit exhaust vertically install of horizontally.

G. Propeller Power Exhaust

- i. Shall be used in conjunction with an integrated economizer.
- ii. Independent modules for vertical or horizontal return configurations shall be available.
- iii. Horizontal power exhaust is shall be mounted in return ductwork.
- iv. Shall be controlled by economizer controller operation. Exhaust fans shall be energized when dampers open past the 0-100% adjustable setpoint on the economizer control.
- v. Capable of adjustable but constant volume.

H. Dehumidification

- i. Shall utilize a dual-phase hot gas reheat control sequence.
- ii. Shall be installed with a thermostat or space temperature sensor and an indoor relative humidity sensor, which shall connect to the Rooftop Unit Controller (RTU-C).
- iii. Shall provide neutral air to the occupied space.
- iv. Shall have two modes: Cooling and Dehumidification.
- v. In cooling mode, the vapor refrigerant shall remove the heat to the outdoor coil, where heat is released outdoor. This allows the refrigerant to condense and become a subcooled liquid and the process shall repeat itself.
- vi. In dehumidification mode, the refrigerant shall absorb heat via the indoor coil from the cooling area. The heat shall be carried via a parallel path to then release heat back into the cooling area allowing for the dehumidification.
- vii. Modulate reheat coil refrigerant temperature via outdoor fan motor controller to achieve neutral air.
- viii. Variable Frequency Drive shall allow the unit to operate with two stages of heat.

I. Roof Curbs (Vertical)

- i. Formed galvanized steel with wood nailer strip and shall be capable of supporting entire unit weight.
- ii. Permits installation and securing of ductwork to curb prior to mounting unit on the curb.

J. Return Air Enthalpy Sensor

- i. The return air enthalpy sensor shall be used in conjunction with an outdoor air enthalpy sensor to provide differential enthalpy control.

K. Indoor Air Quality (CO₂) Sensor

- i. Shall be able to provide demand ventilation indoor air quality (IAQ) control.
- ii. The IAQ sensor shall be available in duct mount, wall mount, or wall mount with LED display. The set point shall have adjustment capability.

L. Smoke detectors

- i. Shall be a Four-Wire Controller and Detector.
- ii. Shall be environmental compensated with differential sensing for reliable, stable, and drift-free sensitivity.
- iii. Shall use magnet-activated test/reset sensor switches.
- iv. Shall have tool-less connection terminal access.
- v. Shall have a recessed momentary switch for testing and resetting the detector.
- vi. Controller shall include:
 - a. One set of normally open alarm initiation contacts for connection to an initiating device circuit on a fire alarm control panel.
 - b. Two Form-C auxiliary alarm relays for interface with rooftop unit or other equipment.
 - c. One Form-C supervision (trouble) relay to control the operation of the Trouble LED on a remote test/reset station.
 - d. Capable of direct connection to two individual detector modules.
 - e. Can be wired to up to 14 other duct smoke detectors for multiple fan shutdown applications.

- M. Barometric Relief:
 - i. Shall include damper, seals, hard-ware, and hoods to relieve excess building pressure.
 - ii. Damper shall gravity-close upon shutdown.
- N. Time Guard:
 - i. Shall prevent compressor short cycling by providing a 5-minute delay (± 2 minutes) before restarting a compressor after shutdown for any reason.
 - ii. One device shall be required per compressor.
- O. Standard Factory Installed Overflow Switch
 - i. Switch shall monitor the condensate level in drain pan and stops compression operation when overflow conditions occur.
- P. Access Panels:
 - i. Hinges with $\frac{1}{4}$ turn fasteners shall be permanently attached.
 - ii. Hinges shall be powder coated and made from stainless steel.
- Q. Adjustable Frequency Drive:
 - i. Unit shall be supplied with an electronic variable frequency drive for the supply air fan.
 - ii. Drive shall be factory installed in an enclosed cabinet.
 - iii. Drive shall meet UL Standard 95-5V.
 - iv. The completed unit assembly shall be UL listed.
 - v. Drives are to be accessible through a tooled access hinged door assembly.
 - vi. The unit manufacturer shall install all power and control wiring.
 - vii. The supply air fan drive output shall be controlled by the factory installed main unit control system and drive status and operating speed shall be monitored and displayed at the main unit control panel.
 - viii. Drive shall be programmed and factory run tested in the unit.
- R. Refrigerant Detection System
 - i. In the event of a detected refrigerant leak, the refrigerant leak detection sensor(s) will trigger the mitigation procedure that shuts off the compressor(s) and turns on the indoor blower motor.
 - ii. In the event of a detected refrigerant leak, the system will display a fault code on the unitary controller. For DDC systems, 'A2L Event' will appear on the LCD module. For Non-DDC systems, a fault code of 40 will appear on the dual seven segment display



GENERAL TERMS OF LIMITED WARRANTY*

Ruud will furnish a replacement for any part of this product which fails in normal use and service within the applicable periods stated, in accordance with the terms of the limited warranty.

*For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.

Compressor	
(Commercial Applications)	Five (5) Years
Aluminized Heat Exchanger	
(Commercial Applications)	Ten (10) Years
Stainless Steel Heat Exchanger	
(Commercial Applications)	Twenty (20) Years
Parts	
(Commercial Applications)	One (1) Year

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

Trademarks are property of their respective owners.

In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.

5600 Old Greenwood Road
Fort Smith, Arkansas 72908 • www.ruud.com

125 Edgeware Road, Unit 1
Brampton, Ontario • L6Y 0P5

RELY ON RUUD.™